

August 1991

## **ADAPTIVE DYNAMICAL FEEDBACK REGULATION STRATEGIES FOR LINEARIZABLE UNCERTAIN SYSTEMS**

Hebertt Sira-Ramirez  
*Universidad de Los Andes,*

Mohamed Zribi  
*Purdue University School of Electrical Engineering*

Shaheen Ahmad  
*Purdue University School of Electrical Engineering*

Follow this and additional works at: <https://docs.lib.purdue.edu/ecetr>

---

Sira-Ramirez, Hebertt; Zribi, Mohamed; and Ahmad, Shaheen, "ADAPTIVE DYNAMICAL FEEDBACK REGULATION STRATEGIES FOR LINEARIZABLE UNCERTAIN SYSTEMS" (1991). *Department of Electrical and Computer Engineering Technical Reports*. Paper 320.  
<https://docs.lib.purdue.edu/ecetr/320>

This document has been made available through Purdue e-Pubs, a service of the Purdue University Libraries.  
Please contact [epubs@purdue.edu](mailto:epubs@purdue.edu) for additional information.



# **Adaptive Dynamical Feedback Regulation Strategies for Linearizable Uncertain Systems**

Hebertt Sira-Ramirez  
Mohamed Zribi  
Shaheen Ahmad

TR-EE 91-38  
August 1991

# ADAPTIVE DYNAMICAL FEEDBACK REGULATION STRATEGIES FOR LINEARIZABLE UNCERTAIN SYSTEMS

Hebertt Sira-Ramírez  
Departamento Sistemas de Control,  
Universidad de Los Andes,  
Mérida-VENEZUELA.

Mohamed Zribi, Shaheen Ahmad  
Real Time Robot Control Laboratory,  
School of Electrical Engineering,  
Purdue University,  
West Lafayette, Indiana 47907, USA.

**Abstract** In this paper we address the design of adaptive dynamical **feedback** strategies of the **continuous**, and discontinuous, types for the output stabilization of nonlinear systems. The class of systems considered corresponds to nonlinear controlled systems exhibiting linear parametric uncertainty. Dynamical feedback controllers, ideally achieving output stabilization via exact linearization, are obtained by means of repeated output differentiation and, either, pole placement, or, sliding **mode** control techniques. The adaptive versions of the dynamical stabilizing controllers are then obtainable through standard, direct, overparametrized adaptive control strategies available for **linearizable** systems. Illustrative examples are provided which deal with the regulation of electro-mechanical systems.

**Keywords** Exact Linearization, Adaptive Control, Variable Structure **Systems**, Electromechanical Systems.

**Preferred Mailing Address** Dr. Hebertt Sira-Ramirez, Avenida Las Américas, Edificio Residencias "El Roble", Piso 6, Apartamento D-6, Mérida 5101. VENEZUELA,.

---

This work was supported by the Consejo de Desarrollo Científico, Humanístico y Tecnológico of the Universidad de Los Andes, Mérida, Venezuela, under Research Grant I-325-90, and by a grant from Shin Meiwa Industries (Japan).

# 1. INTRODUCTION

Asymptotic output stabilization of parametrically uncertain nonlinear systems constitutes an important problem in control systems design. Contributions, from the differential geometric viewpoint, were given by Isidori and Sastry [1], Kanellakopoulos *et al* [2],[3], Taylor *et al* [4], **Campion and Bastin** [5], **Teel *et al*** [6] and many others. For enlightening details, and general results, the **reader** is referred to the books by Sastry and **Bodson** [7], and Narendra and Annaswamy [8]. On-going **developments** in this area are contained in the collection of lectures edited by Kokotovic [9]. For other contributions to the area, the reader is referred to the reprint book edited by Narendra *et al* [10].

In this article, using the results of [1], an adaptive asymptotic output stabilization scheme is proposed for dynamical pole placement, and sliding-mode-based, exactly linearizing controllers, obtained via repeated output differentiation. The schemes are restricted to **the** class of nonlinear systems **with** vector fields which exhibit linear **parameteric** dependence. Availability of the dynamical controller state variables and overparametrization [5] are the key issues that allow an extension of direct adaptive control techniques, available for statically input-output **linearizable** systems, to the case of dynamically controlled systems. Two design examples are presented. The **first** one involves the control a **DC** motor by means of adaptive dynamical pole placement. The second example deals with the stabilization of a magnetic suspension system via adaptive dynamical variable structure control strategies.

In Section 2 of this paper, the adaptive dynamical pole placement stabilization scheme is presented along with the DC motor control design example. Section 3 presents the adaptive dynamical variable structure control stabilization problem including applications to a magnetic suspension system. In both examples, computer simulations are provided to assess **the** performance of the proposed controllers. Concluding remarks, and proposals for further research, are collected in Section 4.

## 2. ADAPTIVE OUTPUT STABILIZATION OF LINEARIZABLE NON LINEAR SYSTEMS VIA DYNAMICAL POLE PLACEMENT.

### 2.1 Input-Output Linearization by Dynamical Pole Placement Techniques

Consider the following  $n$ -dimensional *state space realization* of a single-input single-output nonlinear system :

$$\begin{aligned}\dot{\mathbf{x}} &= \mathbf{f}(\mathbf{x}, \boldsymbol{\theta}) + \mathbf{g}(\mathbf{x}, \boldsymbol{\theta})\mathbf{u} \\ \mathbf{y} &= \mathbf{h}(\mathbf{x}, \boldsymbol{\theta})\end{aligned}\quad (2.1)$$

where  $\mathbf{f} : \mathbf{R}^{n+p} \rightarrow \mathbf{R}^n$  and  $\mathbf{g} : \mathbf{R}^{n+p} \rightarrow \mathbf{R}^n$  are, for fixed  $\boldsymbol{\theta}$  in  $\mathbf{R}^p$ ,  $C^\infty$  vector fields globally defined on  $\mathbf{R}^n$ , and  $\mathbf{h} : \mathbf{R}^{n+p} \rightarrow \mathbf{R}$  is a  $C^\infty$  function. It is assumed that the system has *strong relative degree*  $r < n$  (Isidori [11]). The parameter vector  $\boldsymbol{\theta}$  is assumed to be constant and  $\mathbf{f}, \mathbf{g}$  and  $\mathbf{h}$  are linear functions of  $\boldsymbol{\theta}$ .

The  $i$ -th time derivative of the output function may be written, in terms of the state vector  $\mathbf{x}$  and the **control** input  $\mathbf{u}$ , as :

$$\begin{aligned}y^{(i)} &= \mathbf{b}_i(\mathbf{x}, \boldsymbol{\theta}) \quad \text{for } i < r \quad ; \quad \text{with } \mathbf{b}_0(\mathbf{x}, \boldsymbol{\theta}) = \mathbf{h}(\mathbf{x}, \boldsymbol{\theta}) \\ y^{(i)} &= \mathbf{b}_i(\mathbf{x}, \boldsymbol{\theta}, \mathbf{u}, \mathbf{u}^{(1)}, \dots, \mathbf{u}^{(i-r-1)}) + \mathbf{a}(\mathbf{x}, \boldsymbol{\theta})\mathbf{u}^{(i-r)} \quad \text{for } r \leq i \leq n\end{aligned}\quad (2.2)$$

In **particular**, the  $n$ -th time derivative of  $y$  may be obtained as :

$$y^{(n)} = \mathbf{b}_n(\mathbf{x}, \boldsymbol{\theta}, \mathbf{u}, \mathbf{u}^{(1)}, \dots, \mathbf{u}^{(n-r-1)}) + \mathbf{a}(\mathbf{x}, \boldsymbol{\theta})\mathbf{u}^{(n-r)}\quad (2.3)$$

We assume that the "observability" matrix, constituted by the (row vector) gradients, with respect to  $\mathbf{x}$ , of  $y^{(i)}$  ( $i=0,1,\dots,n-1$ ) is full rank  $n$ . i.e.,

$$\text{rank} \frac{\partial(y, y^{(1)}, \dots, y^{(n-1)})}{\partial \mathbf{x}} = \text{rank} \frac{\partial(y, y^{(1)}, \dots, y^{(n)})}{\partial \mathbf{x}} = n\quad (2.4)$$

This assumption implies that (2.1) can be described by an  $n$ -th order input-output scalar **differential** equation ( see Conte *et al* [12], Diop [13]). The implicit function **theorem** allows one to locally **solve** for  $\mathbf{x}$ , from (2.2), in terms of  $\mathbf{u}$  and its time derivatives, as well as in terms of the derivatives of  $y$ . In other words, there exist a set of  $n$  independent functions  $\boldsymbol{\vartheta}_i$ , implicitly defined by (2.2), such that :

$$\mathbf{x}_i = \boldsymbol{\vartheta}_i(y, y^{(1)}, \dots, y^{(n-1)}, \mathbf{u}, \mathbf{u}^{(1)}, \dots, \mathbf{u}^{(n-r-1)}) \quad ; \quad i = 1, 2, \dots, n\quad (2.5)$$

In general, one **locally** obtains a representation of (2.1) in the form :

$$y^{(n)} = \mathbf{c}(y, y^{(1)}, \dots, y^{(n-1)}, \boldsymbol{\theta}, \mathbf{u}, \mathbf{u}^{(1)}, \dots, \mathbf{u}^{(n-r)})\quad (2.6)$$

**Definition 2.1** (Fliess [14]) Let the output  $y$  be identically zero for an indefinite amount of time. The *zero dynamics*, associated with (2.1), is defined as :

$$c(0, \theta, u, u^{(1)}, \dots, u^{(n-r)}) = 0 \quad (2.7)$$

We assume that (2.7) is locally asymptotically stable to a constant operating point,  $u = U$ . In such a case we say (2.1) is locally *minimum phase* around the equilibrium point of interest. ■

**Proposition 2.2** Let  $u^{[i]}$  denote the following set  $\{u, u^{(1)}, \dots, u^{(i)}\}$  of control input derivatives. Then, the dynamical feedback controller:

$$u^{(n-r)} = - \frac{b_n(x, \theta, u^{[n-r-1]}) + \sum_{i=0}^{r-1} \alpha_i b_i(x, \theta) + \sum_{j=r}^{n-1} \alpha_j [b_j(x, \theta, u^{[j-r-1]}) + a(x, \theta) u^{(j-r)}]}{a(x, \theta)} ; \alpha_n = 1 \quad (2.8)$$

drives the output of system (2.1) to satisfy a closed loop linearized dynamics of the form :

$$y^{(n)} + \alpha_{n-1} y^{(n-1)} + \dots + \alpha_1 y^{(1)} + \alpha_0 y = 0 \quad (2.9)$$

**Proof :** Immediate upon direct substitution of (2.8) on (2.3) and use of the definitions in (2.2). ■

**Provided** that the system is minimum phase, then the scalar time-varying differential equation (2.8) defines a *dynamical feedback controller* which can accomplish exponential output stabilization to zero, in a manner entirely prescribed by the set of chosen design coefficients  $\{\alpha_0, \alpha_1, \dots, \alpha_{n-1}\}$ . Typically, one chooses the  $\alpha$ 's to obtain an asymptotically stable dynamics for (2.9). The set of input derivatives  $u^{[n-r-1]}$ , in (2.8), naturally qualifies as a *state vector*, for the dynamical controller, which is available for measurement. If the quantity  $a(x, \theta)$  is bounded away from zero then no *impasse* points need be considered for the dynamical system representing the linearizing controller (see Fliess and Hasler [15]). This assumption is equivalent to the *strong relative degree* assumption [1].

## 2.2 An Adaptive Regulation Scheme for Dynamically Linearizable Systems.

The effectiveness of the dynamical feedback controller (2.8) is highly dependent upon perfect knowledge of the involved system parameters. It is clear that exact cancellation of nonlinearities would not be generally possible if the dynamical controller (2.8) was computed using estimated

values of such parameters, which are known to be in error with respect to **their** true values. In this section we assume that the components of  $\delta$  are constant, but otherwise **unknown**, and present an adaptive approach to dynamical feedback linearization. We denote the estimated values of the parameter vector as  $\hat{\delta}$ .

**Remark 2.3.** It may be verified that the linearity of  $f$ ,  $g$  and  $h$  with respect to  $\delta$  implies that the quantities  $b_i$  ( $i=0,1,\dots,n-1$ ) and  $a$  in (2.2) are *multilinear* functions of the components  $\theta_i$  of  $\delta$ . Hence, if one defines a large **dimensional** vector  $\Theta$  containing, as individual components, all possible ordered homogeneous multinomial expressions in the  $\theta_i$ 's, of degree smaller or equal than  $n$ , then  $b_i$  ( $i=0,1,\dots,n-1$ ) and  $a$  are indeed linear functions of  $Q$ . This observation and the involved process, known as "overparametrization" [5], allows us to extend recently **proposed** adaptive control techniques [1], developed for *statically linearizable* systems, to systems **linearizable** by *dynamical* feedback (see **Fliess** [16], and also Sira-Ramirez [17]). ■

Define:

$$u^{(n-r)} = \frac{b_n(x, \hat{\theta}, u^{[n-r-1]}) + \sum_{i=0}^{r-1} \alpha_i b_i(x, \hat{\theta}) + \sum_{j=r}^{n-1} \alpha_j [b_j(x, \hat{\theta}, u^{[j-r-1]}) + a(x, \hat{\theta}) u^{(j-r)}]}{a(x, \hat{\theta})} \quad (2.10)$$

Then, if a dynamical controller of the form (2.10), based on parameter estimates, is used to regulate the evolution of  $y^{(n)}$ , the expression (2.3) is found to be, after some **manipulations** :

$$\begin{aligned} & y^{(n)} + \alpha_{n-1} y^{(n-1)} + \dots + \alpha_1 y^{(1)} + \alpha_0 y = \\ & b_n(x, \theta, u^{[n-r-1]}) - b_n(x, \hat{\theta}, u^{[n-r-1]}) + \sum_{i=0}^{r-1} \alpha_i [b_i(x, \theta) - b_i(x, \hat{\theta})] \\ & + \sum_{j=r}^{n-1} \alpha_j \{ b_j(x, \theta, u^{[j-r-1]}) - b_j(x, \hat{\theta}, u^{[j-r-1]}) + [a(x, \theta) - a(x, \hat{\theta})] u^{(j-r)} \} \\ & - [a(x, \theta) - a(x, \hat{\theta})] u^{(n-r-1)} \end{aligned} \quad (2.11)$$

By virtue of Remark 2.3 one may conclude that expression (2.11) can be written as a linear function of the parameter estimation error  $\Theta - \hat{\Theta} := \phi$

$$\begin{aligned} & y^{(n)} + \alpha_{n-1} y^{(n-1)} + \dots + \alpha_1 y^{(1)} + \alpha_0 y = \\ & (\Theta - \hat{\Theta})^T W(x, \hat{\theta}, u^{[n-r-1]}) = \phi^T W(x, \hat{\theta}, u^{[n-r-1]}) \end{aligned} \quad (2.12)$$

where  $W$  is the nonlinear state-dependent regressor vector, depending also on the vector of parameter estimates,  $\hat{\theta}$ , and the measurable "state" of the dynamical controller, represented here by  $u$  and the derivatives of  $u$  up to order  $n-r-1$ , i.e., by  $u^{[n-r-1]}$ . By slightly abusing notation we shall write  $W$  as a function of  $\hat{\Theta}$  rather than as a function of  $\hat{\theta}$ .

In order to find an appropriate adaptation law, the developments given in [1], or in [7] can be followed very closely in a rather straight forward fashion. We summarize the developments in [1] as follows.

Let  $L(s)$  be defined as the characteristic polynomial of the linear differential equation (2.9) and let  $L^{-1}(s)$  stand for the linear time-invariant operator :

$$L^{-1}(s) = \frac{1}{s^n + \alpha_{n-1}s^{n-1} + \dots + \alpha_1s + \alpha_0} \quad (2.13)$$

The output variable  $y$  may then be written as the convolution of the linear operator (2.13) with the nonlinear time-varying function obtained in the right hand side of (2.12). One has :

$$y = L^{-1}(s) * \left[ \phi^T W(x, \hat{\Theta}, u^{[n-r-1]}) \right] \quad (2.14)$$

where the "\*" denotes the convolution operation in the hybrid notation of (2.14).

Let  $e_1$  denote the augmented output error, defined as:

$$e_1 = y + \hat{\Theta}^T L^{-1}(s) * \left[ W(x, \hat{\Theta}, u^{[n-r-1]}) \right] - L^{-1}(s) * \left[ \hat{\Theta}^T W(x, \hat{\Theta}, u^{[n-r-1]}) \right] \quad (2.15)$$

Notice that  $e_1$  can be calculated from measurable signals. It is now easy to see, using (2.14) and the commutativity between the operator  $L^{-1}(s)$  and the (constant) value of the actual parameter, that :

$$e_1 = \phi^T \left( L^{-1}(s) * \left[ W(x, \hat{\Theta}, u^{[n-r-1]}) \right] \right) =: \phi^T \xi \quad (2.16)$$

Where  $\xi$  is the vector of filtered regressor components. From the fact that  $e_1$  is a linear error equation [7] in  $\phi$ , several update laws may be proposed. One such possibility is represented by the following gradient type of update law ( see [7, p. 57] ):

$$\dot{\hat{\Theta}} = -g e_1 W(x, \hat{\Theta}, u^{[n-r-1]}) \quad (2.17a)$$

where  $g$  is a positive constant called the *adaptation gain*.

A **second** possibility is represented by the *normalized gradient* update law (see [1] and [7, pp.58]):

$$-\dot{\hat{\Theta}} = \dot{\phi} = -\frac{e_1 \xi}{1 + \xi^T \xi} \quad (2.17b)$$

The parameter estimation error  $\phi$  can converge to zero, provided *persistence of excitation conditions* are satisfied during the stabilization transient ( see [1], [7, ch. 2 ] and [8, ch. 6] ). In such a case the output signal  $y$  is asymptotically stable.

## 2.3 A DC Motor Example

### 2.3.1 Non-Adaptive Dynamical Linearizing: Control for angular velocity regulation in a DC Motor

Consider a field controlled DC-motor model ( see Rugh [18, pp. 98] ) given by :

$$\begin{aligned} \dot{x}_1 &= -\frac{R_a}{L_a} x_1 - \frac{K}{L_a} x_2 u + \frac{V_a}{L_a} \\ \dot{x}_2 &= -\frac{B}{J} x_2 + \frac{K}{J} x_1 u \\ y &= x_2 - \Omega \end{aligned} \quad (2.18)$$

where  $x_1$  is the armature circuit current,  $x_2$  is the angular velocity of the rotating axis. The armature circuit voltage,  $V_a$ , is assumed to be constant and while the field winding **input** voltage,  $u$ , acts as a control variable. The quantity  $\Omega$  represents a desired constant angular velocity.

System (2.18) is of the form:

$$\begin{aligned} \dot{x} &= \theta_1 f_1(x) + \theta_2 f_2(x) + \theta_3 f_3(x) + [\theta_4 g_1(x) + \theta_5 g_2(x)] u \\ y &= h(x) \end{aligned} \quad (2.19)$$

**with:**

$$f_1(x) = \begin{bmatrix} -x_1 \\ 0 \end{bmatrix}, f_2(x) = \begin{bmatrix} 0 \\ -x_2 \end{bmatrix}, f_3(x) = \begin{bmatrix} 1 \\ 0 \end{bmatrix}; g_1(x) = \begin{bmatrix} -x_2 \\ 0 \end{bmatrix}, g_2(x) = \begin{bmatrix} 0 \\ x_1 \end{bmatrix}$$

and :

$$\theta_1 = \frac{R_a}{L_a}, \theta_2 = \frac{B}{J}, \theta_3 = \frac{V_a}{L_a}, \theta_4 = \frac{K}{L_a}, \theta_5 = \frac{K}{J}$$

It is easy to verify that for the given system (2.18), the rank of the following 2 by 2 matrix :

$$\begin{bmatrix} \frac{\partial y}{\partial x} & \frac{\partial y^{(1)}}{\partial x} \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ \theta_5 u & -\theta_2 \end{bmatrix}$$

is **everywhere** equal to 2, except when  $u = 0$ . Angular velocity stabilization tasks which require polarity reversals in the field winding input voltage  $u$  have to be treated **separately** by different techniques.

A constant equilibrium point, parametrized in terms of the desired angular velocity  $\Omega$ , for this system is given by :

$$\begin{aligned} x_1(\Omega) &= \frac{\theta_3}{2\theta_1} \left( 1 + \sqrt{1 - \frac{4\theta_1\theta_2\theta_4\Omega^2}{\theta_3^2\theta_5}} \right) \\ x_2(\Omega) &= \Omega \\ u(\Omega) &= \frac{2\theta_1\theta_2\Omega}{\theta_3\theta_5 \left( 1 + \sqrt{1 - \frac{4\theta_1\theta_2\theta_4\Omega^2}{\theta_3^2\theta_5}} \right)} \end{aligned} \quad (2.20)$$

An input-output representation of system (2.18) readily follows by elimination of the state vector  $x$  from the expressions of  $y$  and  $dy/dt$  :

$$\begin{aligned} y^{(2)} - \theta_2^2 (y + \Omega) + (\theta_2 + \theta_1) [y^{(1)} + \theta_2(y + \Omega)] + \theta_4\theta_5(y + \Omega)u^2 \\ - \theta_3\theta_5 u - \frac{u^{(1)}}{u} [y^{(1)} + \theta_2(y + \Omega)] = 0 \end{aligned} \quad (2.21)$$

The zero dynamics associated to system (2.18) is obtained from (2.21) by letting  $y = y^{(1)} = y^{(2)} = 0$ , as :

$$u^{(1)} = u \left( \frac{\theta_4\theta_5}{\theta_2} u^2 - \frac{\theta_3\theta_5}{\theta_2\Omega} u + \theta_1 \right) \quad (2.22)$$

The three constant equilibrium points for the zero dynamics are :  $u = 0$ , ( which was discarded as a singularity ), and :

$$u = \frac{\theta_3}{2\theta_4\Omega} \left[ 1 \pm \sqrt{1 - 4 \frac{\theta_1\theta_2\theta_4}{\theta_5} \left( \frac{\Omega}{\theta_3} \right)^2} \right] \quad (2.23)$$

Under the condition that  $\theta_5\theta_3^2 > 4\theta_1\theta_2\theta_4\Omega^2$  (i.e.,  $V_a^2 - 4R_aB\Omega^2 > 0$ ), one finds quite straight **forwardly**, by plotting  $u^{(1)}$  vs  $u$ , from (2.22), that the larger **solution** in (2.23) is unstable while the solution with smaller  $u$  is asymptotically stable. The system is thus **locally** minimum phase.

Let  $\omega_n > 0$  and  $\zeta > 0$ . Imposing on the output  $y$  of (2.18) the following;linear asymptotically stable **dynamics**:

$$y^{(2)} + 2\zeta\omega_n y^{(1)} + \omega_n^2 y = 0 \quad (2.24)$$

one readily obtains, using the result of proposition 2.2 above, the following stabilizing dynamical feedback **controller**:

$$\dot{u} = \frac{1}{\theta_5 x_1} \left[ \left( 2\zeta\omega_n \theta_2 - \omega_n^2 - \theta_2^2 \right) x_2 - \theta_3 \theta_5 u + \left( \theta_2 + \theta_1 - 2\zeta\omega_n \right) \theta_5 x_1 u + \theta_4 \theta_5 x_2 u^2 + \omega_n^2 \Omega \right] \quad (2.25)$$

This **dynamical** controller achieves asymptotic output stabilization around the stable equilibrium point (see [17] for the non-adaptive **tracking** version of this controller).

### 2.3.2 Adaptive **Dynamical** Linearizing Control for **angular velocity** regulation in a DC Motor

Due to lack of parameter knowledge, instead of the exactly linearizing controller (2.25), one uses a **dynamical** controller, based on the estimates of the parameters, their products, and powers, as:

$$\dot{u} = \frac{\left[ \left( 2\zeta\omega_n \widehat{\theta}_2 - \omega_n^2 - \widehat{\theta}_2^2 \right) x_2 - \widehat{\theta}_3 \widehat{\theta}_5 u + \left( \widehat{\theta}_2 \widehat{\theta}_5 + \widehat{\theta}_1 \widehat{\theta}_5 - 2\zeta\omega_n \widehat{\theta}_5 \right) x_1 u + \widehat{\theta}_4 \widehat{\theta}_5 x_2 u^2 + \omega_n^2 \Omega \right]}{\widehat{\theta}_5 x_1} \quad (2.26)$$

or, equivalently, in terms of the components of an **overparametrization** vector  $\widehat{\Theta}$  defined as :

$$\widehat{\Theta} = (\widehat{\Theta}_1, \widehat{\Theta}_2, \dots, \widehat{\Theta}_{20}) = (\widehat{\theta}_1, \widehat{\theta}_2, \dots, \widehat{\theta}_5, \widehat{\theta}_1^2, \widehat{\theta}_1 \widehat{\theta}_2, \dots, \widehat{\theta}_1 \widehat{\theta}_5, \widehat{\theta}_2^2, \widehat{\theta}_2 \widehat{\theta}_3, \dots, \widehat{\theta}_5^2)$$

$$\dot{u} = \frac{\left[ (2\zeta\omega_n \hat{\Theta}_2 - \omega_n^2 - \hat{\Theta}_{11})x_2 - \hat{\Theta}_{17}u + (\hat{\Theta}_{14} + \hat{\Theta}_{10} - 2\zeta\omega_n \hat{\Theta}_5)x_1u + \hat{\Theta}_{19}x_2u^2 + \omega_n^2\Omega \right]}{\hat{\Theta}_5x_1} \quad (2.27)$$

Let  $\phi_i$  denote the parameter estimation error  $\Theta_i - \hat{\Theta}_i$  ( $i=1, \dots, 20$ ), then, using the results of the previous section we obtain the following expression for the closed loop behavior of the output variable:

$$y^{(2)} + 2\zeta\omega_n y^{(1)} + \omega_n^2 y = [\phi_1 \quad \dots \quad \phi_{20}] \begin{bmatrix} w_1(x, \hat{\Theta}, u) \\ \vdots \\ w_{20}(x, \hat{\Theta}, u) \end{bmatrix} \quad (2.28)$$

The elements constituting the parameter estimation error update law are summarized below.

#### Parameter estimation error update law

$$\dot{\phi}_i = -\dot{\hat{\Theta}}_i = -e_1 \frac{\xi_i}{1 + \xi^T \xi} \quad ; \quad i = 1, \dots, 20$$

#### Regressor vector components

$$w_2(x, \hat{\Theta}, u) = -2\zeta\omega_n x_2$$

$$w_5(x, \hat{\Theta}, u) = \frac{\left[ (2\zeta\omega_n \hat{\Theta}_2 - \omega_n^2 - \hat{\Theta}_{11})x_2 - \hat{\Theta}_{17}u + (\hat{\Theta}_{14} + \hat{\Theta}_{10} - 2\zeta\omega_n \hat{\Theta}_5)x_1u + \hat{\Theta}_{19}x_2u^2 + \omega_n^2\Omega \right]}{\hat{\Theta}_5x_1}$$

$$w_{10}(x, \hat{\Theta}, u) = -x_1u, \quad w_{11}(x, \hat{\Theta}, u) = x_2, \quad w_{14}(x, \hat{\Theta}, u) = -x_1u, \quad w_{17}(x, \hat{\Theta}, u) = u, \quad w_{19}(x, \hat{\Theta}, u) = -2x_2u^2$$

where those regressor vector entries not listed above have value equal to zero.

#### Augmented output stabilization error

$$e_1 = \sum_{i=4}^{i=10} \phi_i \xi_i$$

#### Filtered regressor components (with zero initial conditions):

$$\ddot{\xi}_i = -2\zeta\omega_n \dot{\xi}_i - \omega_n^2 \xi_i + w_i(x, \hat{\Theta}, u)^{[n-r-1]} \quad ; \quad i = 2, 5, 10, 11, 14, 17, 19$$

### Parameter estimation error update law

$$\dot{\phi}_i = -\hat{\Theta}_i = -e_1 \frac{\xi_i}{1 + \xi^T \xi} ; \quad i = 2, 5, \dots, 19$$

### 2.3.3 Simulation Results

Computer simulations were run to assess the **performance** of the **adaptive** dynamical controller for a DC **motor** with the following nominal values for the system parameters:

$$\begin{aligned} R_a &= 7 \text{ Ohm}, L_a = 120 \text{ mH}, K = 1.41 \times 10^{-2} \text{ N-m/A} , \\ B &= 6.04 \times 10^{-6} \text{ N-m-s/rad} , J = 1.06 \times 10^{-6} \text{ N-m-s}^2/\text{rad}, V_a = 5 \text{ V} \end{aligned}$$

The dynamically controlled state variable trajectories  $\mathbf{x}_1(t)$  and  $\mathbf{x}_2(t)$  are **depicted**, respectively, in Figures 1 and 2, while the adaptive control input trajectory  $\mathbf{u}(t)$  is shown in Figure 3. The state components slowly converge to  $\mathbf{x}_1 = 0.661 \text{ A}$ , and  $\mathbf{x}_2 = 202.3 \text{ rad/s}$ . These values are within 4% of their ideal equilibrium values given by :  $\mathbf{x}_1 = 0.702 \text{ A}$ ,  $\mathbf{x}_2 = \Omega = 200 \text{ rad/s}$ . In figure 4, the value of the **estimated** parameter  $\hat{\theta}_2 = \hat{\Theta}_2$  is shown to slowly converge to a constant value of 5.555 which does not coincide with its nominal value of 5.698. The rest of the parameters have small variations and they **are** not shown here. The dynamical controller parameters were set as :  $\zeta = 0.7$ ,  $\omega_n = 30$ .

## 3. ADAPTIVE OUTPUT STABILIZATION OF LINEARIZABLE NON LINEAR SYSTEMS VIA DYNAMICAL SLIDING MODE CONTROL.

### 3.1 Linearization by Discontinuous Dynamical Feedback Control.

In this section we present an adaptive dynamical variable structure linearization scheme for **asymptotic** output stabilization problems in systems described by (2.1). In spite of the fact that sliding **mode** control is, per se , a control technique devised to efficiently deal with parametric and external uncertainty, the class of systems where the switching surface does **not** depend on system parameters may be very limited indeed. Some of the advantages of dynamical sliding mode control for nonlinear systems lies in the possibility of chattering-free control inputs **and** state responses (for more **details**, and an application example, from the chemical process control area, the reader is **referred** to Sira-Ramirez [19] ). However, dynamical sliding modes are naturally created on suitable input-dependent sliding surfaces which crucially depend upon system **parameters**. These in turn may

be completely unknown making the sliding surface definition somewhat **contradictory**. In this section we shall **address** such a class of problems from an adaptive control viewpoint.

**Proposition 3.1** Let  $\mu$  be a strictly positive scalar quantity. Then, the following dynamical discontinuous feedback controller:

$$\begin{aligned} a(x,\theta)u^{(n-r)} = & -b_n(x,\theta,u^{[n-r-1]}) - \sum_{i=1}^{r-1} \alpha_i b_i(x,\theta) - \sum_{j=r}^{n-1} \alpha_j [b_j(x,\theta,u^{[j-r-1]}) + a(x,\theta)u^{(j-r)}] \\ & - \mu \operatorname{sgn} \left\{ \sum_{i=1}^r \alpha_i b_{i-1}(x,\theta) + \sum_{j=r+1}^n \alpha_j [b_{j-1}(x,\theta,u^{[j-r-2]}) + a(x,\theta)u^{(j-r-1)}] \right\} ; \alpha_n = 1 \end{aligned} \quad (3.1)$$

drives the output of system (2.1) to satisfy, in finite time, a linearized dynamics of the form :

$$y^{(n-1)} + \alpha_{n-1}y^{(n-2)} + \dots + \alpha_1 y = 0 \quad (3.2)$$

**Proof:** Define the quantity :  $s = y^{(n-1)} + \alpha_{n-1}y^{(n-2)} + \dots + \alpha_1 y$ , and let  $s(0)$  stand for the value of  $s$  at time  $t = 0$ . One easily verifies that  $ds/dt = -\mu \operatorname{sgn}(s)$ . Hence the condition  $s = 0$  is reached in finite time  $T$ , given by :  $T = \mu^{-1} |s(0)|$ , and the condition  $s = 0$  is indefinitely sustained in a *sliding mode* fashion (Utkin [20]). ■

**Provided** that the system is minimum phase, the scalar time-varying differential equation (3.2) defines a *dynamical discontinuous feedback controller* which can accomplish exponential output stabilization to zero. As before, one typically chooses the gains  $\alpha_i$  ( $i=1,2,\dots,n-1$ ), to obtain an asymptotically stable dynamics for (3.2).

### 3.2 An Adaptive Regulation Scheme for Linearizable Systems using Dynamical Sliding-Mode Control.

Consider the time derivative of the quantity  $s$ , defined in the proof of proposition 3.1.:

$$\dot{s} = \sum_{i=1}^{r-1} \alpha_i b_i(x,\theta) + \sum_{j=r}^n \alpha_j [b_j(x,\theta,u^{[j-r-1]}) + a(x,\theta)u^{(j-r)}] \quad (3.3)$$

**Lei:**  $\hat{s}$ , the estimate of the sliding surface coordinate function, be defined as :

$$\hat{s} = \sum_{i=1}^r \alpha_i b_{i-1}(x, \hat{\theta}) + \sum_{j=r+1}^n \alpha_j \left[ b_{j-1}(x, \hat{\theta}, u^{[j-r-2]}) + a(x, \hat{\theta}) u^{(j-r-1)} \right] \quad (3.4)$$

Define also :

$$\begin{aligned} a(x, \hat{\theta}) u^{(n-r)} = & -b_n(x, \hat{\theta}, u^{[n-r-1]}) - \sum_{i=1}^{r-1} \alpha_i b_i(x, \hat{\theta}) - \sum_{j=r}^{n-1} \alpha_j \left[ b_j(x, \hat{\theta}, u^{[j-r-1]}) + a(x, \hat{\theta}) u^{(j-r)} \right] \\ & - \mu \operatorname{sgn} \left\{ \sum_{i=1}^r \alpha_i b_{i-1}(x, \hat{\theta}) + \sum_{j=r+1}^n \alpha_j \left[ b_{j-1}(x, \hat{\theta}, u^{[j-r-2]}) + a(x, \hat{\theta}) u^{(j-r-1)} \right] \right\} \end{aligned} \quad (3.5)$$

Then, if a dynamical controller of the form (3.5), based on parameter estimates, is used to regulate the evolution of  $ds/dt$ , the expression (3.3) is found to be, after some manipulations :

$$\begin{aligned} \dot{s} = & -\mu \operatorname{sgn} \hat{s} + \sum_{i=1}^{r-1} \alpha_i \left[ b_i(x, \theta) - b_i(x, \hat{\theta}) \right] \\ & + \sum_{j=r}^{n-1} \alpha_j \left\{ b_j(x, \theta, u^{[j-r-1]}) - b_j(x, \hat{\theta}, u^{[j-r-1]}) + \left[ a(x, \theta) - a(x, \hat{\theta}) \right] u^{(j-r)} \right\} \\ & + b_n(x, \theta, u^{[n-r-1]}) - b_n(x, \hat{\theta}, u^{[n-r-1]}) - \left[ a(x, \theta) - a(x, \hat{\theta}) \right] u^{(n-r)} \end{aligned} \quad (3.6)$$

where  $u^{(n-r)}$  above represents the expression of the estimated controller, given by (3.5).

By virtue of Remark 2.3 one may conclude that expression (3.6) can be written as a linear function of the parameter estimation error  $\mathcal{S} \cdot \hat{\Theta} := \phi$

$$\dot{s} = -\mu \operatorname{sgn} \hat{s} + (\mathcal{S} - \hat{\mathcal{S}})^T \mathbf{W}(x, \hat{\theta}, u^{[n-r-1]}) = -\mu \operatorname{sgn} \hat{s} + \phi^T \mathbf{W}(x, \hat{\theta}, u^{[n-r-1]}) \quad (3.7)$$

where  $\mathbf{W}$  is the nonlinear state-dependent *regressor vector* depending also on the vector of parameter estimates,  $\hat{\theta}$ , and the "state" of the dynamical controller, represented here by  $u$  and the derivatives of  $u$  up to order  $n-r-1$ , i.e., by  $u^{[n-r-1]}$ . By slightly abusing notation we shall write  $\mathbf{W}$  as a function of  $\hat{\Theta}$  rather than as a function of  $\hat{\theta}$ .

It is easy to see that the switching surface coordinate estimation error  $s - \hat{s}$  is given by :

$$\begin{aligned}
s - \hat{s} &= \sum_{i=1}^r \alpha_i [b_{i-1}(x, \theta) - b_{i-1}(x, \hat{\theta})] + \\
&\sum_{j=r+1}^n \alpha_j \left\{ b_{j-1}(x, \theta, u^{[j-r-2]}) - b_{j-1}(x, \hat{\theta}, u^{[j-r-2]}) + [a(x, \theta) - a(x, \hat{\theta})] u^{(j-r-1)} \right\} \quad (3.8) \\
&= (\Theta - \hat{\Theta})^T W_s(x, u^{[n-r-1]}) = \phi^T W_s(x, u^{[n-r-1]})
\end{aligned}$$

where  $W_s(x, u^{[n-r-1]})$  is a switching *surface* regressor vector which **does** not depend on the **parameter** estimates.

Let  $K$  be a known positive definite (diagonal) matrix of **entires**  $K_{ii}$ . Consider the Lyapunov function **given** by :

$$V(s, \phi) = \frac{1}{2} s^2 + \frac{1}{2} \phi^T K \phi \quad (3.9)$$

The time derivative of such a Lyapunov function is obtained **as**:

$$\dot{V}(s, \phi) = s \dot{s} + \phi^T K \dot{\phi} = -\mu s \operatorname{sgn} \hat{s} + \phi^T [s W(x, \hat{\Theta}, u^{[n-r-1]}) + K \dot{\phi}]$$

Choosing the variations of the parameter adaptation error according to the law :

$$\begin{aligned}
\dot{\phi} &= -\hat{\Theta} = -s K^{-1} W(x, \hat{\Theta}, u^{[n-r-1]}) \\
&= -[\hat{s} + \phi^T W_s(x, u^{[n-r-1]})] K^{-1} W(x, \hat{\Theta}, u^{[n-r-1]}) \quad (3.10)
\end{aligned}$$

one obtains:

$$\dot{V}(s, \phi) = -\mu s \operatorname{sgn} \hat{s} = \begin{cases} -\mu |s| & \text{for } \operatorname{sgn} s = \operatorname{sgn} \hat{s} \\ \mu |s| & \text{for } \operatorname{sgn} s = -\operatorname{sgn} \hat{s} \end{cases} \quad (3.11)$$

It follows from (3.11) that the values of  $s$  will converge towards the manifold  $s = 0$  as long as  $s$  and  $\hat{s}$  exhibit the same sign. However, in the region bounded by the manifolds  $s = 0$  and  $\hat{s} = 0$ , both quantities have different signs and the trajectories of  $s$  are actually "repelled" from  $s = 0$ . It is easy to see from (3.7) that if  $\mu$  is large enough to overcome the supremum of the **absolute** value of  $\phi^T W$ , then a sliding **motion** exists, for the trajectory of  $s$ , on the switching manifold  $s = 0$ . Hence, the values of  $s$  will not converge to zero, but, rather, they will be "trapped" on the estimated surface  $s = 0$  in a sliding motion and (3.2) will only be approximately satisfied.

**Remark 3.2** It follows from (3.8) that, if the parameter estimation error  $\phi$  converges to zero then the actual value of the surface coordinate function  $s$  will indeed converge to zero, **while** sliding on  $\hat{s} = 0$ . However, convergence of the estimation error  $\phi$  to zero is very much attached to the condition of *persistence of excitation* (see [7],[8]). This condition may not be fulfilled **while** the output is being driven to zero in a stable fashion. ■

We have thus proven the following result :

**Theorem 3.3** Let  $\mu$  be such that :

$$\mu > \sup \left| \phi^T W(x, \hat{\Theta}, u^{[n-r-1]}) \right| \quad (3.12)$$

Then, the adaptive dynamical discontinuous control law (3.4), (3.5),(3.10) renders a sliding mode trajectory on the switching manifold  $\hat{s} = 0$  which asymptotically stabilizes the output of the system (2.1) to the equilibrium value of the approximately linear dynamics given by :

$$y^{(n-1)} + \alpha_{n-1}y^{(n-2)} + \dots + \alpha_1 y = \phi^T W_s(x, u^{[n-r-1]}) \quad (3.13)$$

**Remark 3.4** Condition (3.12) can not be verified *a priori* due to its **dependance** on the state of the system (2.1) and on the state of the dynamical controller (2.12). If a "modulated" gain  $\mu$  is allowed for the **discontinuous** controller then one may choose  $\mu = k \left| \phi^T W(x, \hat{\Theta}, u^{[n-r-1]}) \right|$ , with  $k > 1$ . This guarantees existence of a sliding regime on  $\hat{s} = 0$ . ■

## 3.2 A Magnetic Suspension System Example

### 3.2.1 Non Adaptive Dynamical Linearizing Sliding Mode Controller for a Magnetic Suspension System

Consider the magnetic ball suspension system described by ( see also Kuo [21]) :

$$\begin{aligned} \dot{x}_1 &= x_2 \\ \dot{x}_2 &= g - \frac{c}{M} \frac{u}{x_1} = g - \theta_1 \frac{u}{x_1} \\ y &= x_1 - X \end{aligned} \quad (3.14)$$

Where  $x_1$  represents the position of the ball measured from the magnet. The state variable  $x_2$  represents the ball downwards velocity and  $u$  is the non-negative control variable (actually

representing the square of the current flowing through the electromagnet coils ).  $M$  is the mass of the ball and  $c$  is a constant. The ratio  $c/M$  is assumed to be unknown.

It is desired to regulate the position of the ball to a prescribed set-point value specified by the constant  $X$ . It is assumed that the control variable  $u$  is naturally bounded in the closed interval  $[0, U_{\max}]$ .

System (3.14) is exactly **linearizable** by static state feedback. A sliding **mode** controller design would entitle large chattering of the input variable. However, a dynamical **sliding** mode controller can still be **designed** for (3.14) by considering the *extended system model* (see Nijmeijer and van der Schaft [22]) of (3.14).

$$\begin{aligned}\dot{x}_1 &= x_2 \\ \dot{x}_2 &= g - \theta_1 \frac{u}{x_1} \\ \dot{u} &= v \\ y &= x_1 - X\end{aligned}\tag{3.15}$$

Consider the following input-dependent sliding surface for (3.15):

$$s = g - \theta_1 \frac{u}{x_1} + 2\zeta\omega_n x_2 + \omega_n^2(x_1 - X)\tag{3.16}$$

If  $s$  can be brought to zero in finite time, the ideal sliding dynamics is seen to satisfy :

$$y^{(2)} + 2\zeta\omega_n y^{(1)} + \omega_n^2 y = 0\tag{3.17}$$

Using the results of proposition 3.1, one finds that the dynamical **variable** structure controller is represented by :

$$u = \frac{x_1}{\theta_1} \left[ 2\zeta\omega_n \left( g - \theta_1 \frac{u}{x_1} \right) + \omega_n^2 x_2 + \mu \operatorname{sgn} s \right] + \frac{x_2 u}{x_1}\tag{3.18}$$

### 3.2 Adaptive Dynamical Sliding Mode Linearizing Control for Magnetic Suspension System

Due to lack of exact parameter knowledge, instead of the controller (3.18), one uses a dynamical variable structure controller, based on estimates of the parameter **and** the sliding surface **coordinate** function:

$$\dot{u} = \frac{x_1}{\hat{\theta}_1} [ 2\zeta\omega_n(g - \hat{\theta}_1 \frac{u}{x_1}) + \omega_n^2 x_2 + \mu \operatorname{sgn} \hat{s} ] + \frac{x_2 u}{x_1} \quad (3.19)$$

where :

$$\hat{s} = g - \hat{\theta}_1 \frac{u}{x_1} + 2\zeta\omega_n x_2 + \omega_n^2 (x_1 - X) \quad (3.20)$$

Let  $\phi_1$  denote the parameter estimation error,  $\theta_1 - \hat{\theta}_1$ . Then, the evolution of the sliding surface coordinate function  $s$  obeys :

$$s = -\mu \operatorname{sgn} \hat{s} - \frac{\phi_1}{\hat{\theta}_1} [ 2\zeta\omega_n(g - \hat{\theta}_1 \frac{u}{x_1}) + \omega_n^2 x_2 + \mu \operatorname{sgn} \hat{s} ] \quad (3.21)$$

A sliding motion is induced on the estimate of the switching surface  $\hat{s} = 0$ . Notice that, from (3.16) and (3.20) one obtains :

$$s = \hat{s} - \phi_1 \frac{x_3}{x_1} \quad (3.22)$$

Using the result in equation (3.10), we obtain a parameter estimation error update law of the form:

$$\dot{\phi}_1 = -\dot{\hat{\theta}}_1 = (\hat{s} - \phi_1 \frac{x_3}{x_1}) \frac{2\zeta\omega_n g + \omega_n^2 x_2}{\hat{\theta}_1} \quad (3.23)$$

**Simulations** were run to assess the performance of the adaptive dynamical sliding mode controller (3.19),(3.20),(3.23) on a magnetic ball suspension system with the following parameters:

$$\theta_1 = \frac{c}{M} = 100 \text{ N-m/A}^2, \quad g = 9.81 \text{ m/s}^2$$

The state variable trajectories  $x_1(t)$ ,  $x_2(t)$  are shown in figure 5. The non-chattering control input trajectory is depicted in Figure 6. The state trajectories converge to the values  $x_1 = 0.605 \text{ m}$ ,  $x_2 = 6.1 \times 10^{-5} \text{ m/s}$ . These values are reasonably close to their ideal equilibrium values given by  $x_1 = 0.6 \text{ m}$  and  $x_2 = 0$ . In figure 7, the estimated parameter is shown. This parameter slowly converges to a constant value of  $102.4 \text{ N-m/A}^2$  which does not coincide with the "true" value of  $100 \text{ N-m/A}^2$ . Figure 8 and 9 show, respectively, the time evolution of the sliding surface coordinate function  $s$  and its estimated value:  $\hat{s}$ . It is clearly seen that sliding motions take place on  $\hat{s} = 0$ , while the value of  $s$  slowly converges towards  $\hat{s} = 0$  yielding a steady state error. The variable structure controller parameters and the constants for the adaptation laws were set as :  $\mu = 20$ ,  $\zeta = 0.9$ ,  $\omega_n = 7$ ,  $K_{11} = K_{22} = 0.1$ .

## 4. CONCLUSIONS

In this paper, adaptive dynamical continuous and discontinuous **feedback** compensators, which approximately accomplish asymptotic output stabilization, were examined **for** a class of parametric uncertain systems linearizable by dynamical feedback strategies. Adaptive: dynamical feedback linearization may be accomplished by extending the available results for **adaptive** statically linearizable systems. **This** simply entitles the incorporation of the states of the dynamical controller as part of the adaptation **mechanism**. A controller design example was presented for the **asymptotic** stabilization of the shafts angular velocity in a nonlinear DC motor. The performance of the controller was evaluated through computer simulations which were encouraging.

An extension of the dynamical variable structure control techniques **developed** in [19], and in **Sira-Ramirez** [23], were presented for the adaptive case. The results show that whenever the **input-dependent** sliding surface exhibits an explicit dependence on the uncertain parameters, a sliding motion **can** only be generated on an estimate of the switching surface, which is known to be in error with respect to the exactly linearizing manifold. Thus, a small constant stabilization error, directly dependent on the steady state parameter estimation error, may be always present in the proposed adaptive scheme, if the condition of persistency of excitation is not verified during the transient. However, if persistency of excitation conditions are satisfied, these will, surely, induce more accurate results **on** the stabilization task. This condition, as it is well known, is **more** naturally verified in adaptive output tracking tasks. An illustrative example was presented dealing with the adaptive dynamical variable structure stabilization of a magnetic suspension system. **The** proposed adaptive control approach inherits, from the underlying **dynamical** sliding mode control scheme, the **chattering-free** trajectories for the inputs and the associated state and output responses.

## REFERENCES

- [1] S. **Sastry** and A. Isidori, " Adaptive Control of Linearizable Systems," IEEE Transactions on Automatic Control, Vol. AC-34, No. 11, pp. 1123-1131. November 1989.
- [2] I. **Kanellakopoulos**, P.V. Kokotovic, and R. Marino, " Robustness of Adaptive Nonlinear Control under an Extended Matching Condition," IFAC, NOLCOS, pp. 192-197, Capri-Italy, 1989.
- [3] I. **Kanellakopoulos**, P.V. Kokotovic, and R. Marino, " An Extended **Direct** Scheme for Robust Adaptive Nonlinear Control," Automatica Vol. 27, No. 2, pp. 247-255, 1991.
- [4] D. Taylor, P.V. Kokotovic, R. Marino and I. Kanellakopoulos, " Adaptive Regulation of Nonlinear Systems with Unmodelled Dynamics," IEEE Transactions on Automatic Control, Vol. 34, pp. 405-412. 1989.

- [5] G. **Campion** and G. **Bastin**, "Indirect Adaptive State Feedback Control of Linearly **Parametrized** Non-Linear Systems," International Journal of Adaptive Control and Signal Processing, Vol. 4, pp. 345-358, 1990.
- [6] A. Teel, R. Kadiyala, P.V. Kokotovic and S. Sastry, "Indirect Techniques for Adaptive Input-Output Linearization of Non-linear Systems," International Journal of Control, Vol. 53, No. 1, pp. 193-22, 1991.
- [7] S. Sastry and M. **Bodson**, Adaptive Control. Stability. Convergence and Robustness, Prentice-Hall, Englewood Cliffs, N.J., 1989
- [8] K.S. Narendra and A.M. Annaswamy , Stable Adaptive Systems , Prentice-Hall, Englewood Cliffs, N.J.,1989.
- [9] P.V. Kokotovic, Foundations of Adaptive Control, Lecture Notes in Control and Information Sciences, Vol. Springer-Verlag, Berlin, 1991.
- [10] K. S. Narendra, R. **Ortega**, P. Dorato, Advances in Adaptive Control, IEEE Press: Piscataway, N.J., 1991.
- [11] A. Isidori, Nonlinear Control Systems, 2nd Edition, Springer-Verlag, Berlin 1989.
- [12] G. Conte, C.H. Moog and A. Perdon, "Un théorème sur la **représentation** entree -sortie d'un système non linéaire," C.R. Acad. Sci. Paris, 307, **Serie I**, pp. 363-366..1988.
- [13] S. **Diop**, "Elimination in Control Theory,"Mathematics of Control, Signals and Systems, Vol. 4, pp. 17-32, 1991.
- [14] M.**Fliess**," What the **Kalman** State Variable Representation is Good For,"29th IEEE Conference on Decision and Control. Vol. 3, pp.1282-1287. Honolulu, Hawaii, December 1990.
- [15] M. **Fliess** and M. Hasler, " Questioning the Classic State-Space Description via Circuit **Examples**," in Mathematical Theory of Networks and Systems (MTNS-89) , M.A. Kaashoek, A.C.M. Ram and J.H. van Schuppen (Eds.) Progress in Systems and Control, Birkhauser, Boston.
- [16] M. **Fliess**, " Generalized Controller Canonical Forms for Linear and Nonlinear **Dynamics**." IEEE Transactions on Automatic Control, Vol. AC-35, No. 9, pp. 994-1001, **September** · 1990.
- [17] H. **Sira-Ramirez**, "Dynamical Variable Structure Control Strategies in **Asymptotic** Output **Tracking** Problems," IEEE Transactions on Automatic Control (to appear).
- [18] W. Rugh, Nonlinear System Theory. The Volterra/Wiener Approach The Johns Hopkins University Press : Baltimore 1981.
- [19] H. **Sira-Ramirez**, "Dynamical Sliding Mode Control Strategies in the Regulation of Nonlinear Chemical Processes," International Journal of Control, (to appear)
- [20] V.I. **Utkin**, Sliding Modes and their Applications in Variable Structure Systems, MIR : Moscow, 1978.

- [21] B. Kuo, Automatic Control Systems, 6th Edition, Prentice Hall : Englewood Cliffs, New Jersey 1991.
- [22] H. Nijmeijer and A.J. van der Schaft, Nonlinear Dynamical Control Systems , Springer Verlag : Berlin, 1990.
- [23] H. Sira-Ramirez, " Asymptotic Output Stabilization for Nonlinear **Systems** via **Dynamical** Variable Structure Control, " Dynamics and Control, (to appear ).

Acknowledgments The first author is highly indebted to Dr. **Shaheen Ahmad** for his kind invitation to visit the Electrical Engineering School of **Purdue** University **during** the month of August 1991. Discussions with Professor M. Fliess are also gratefully acknowledged.

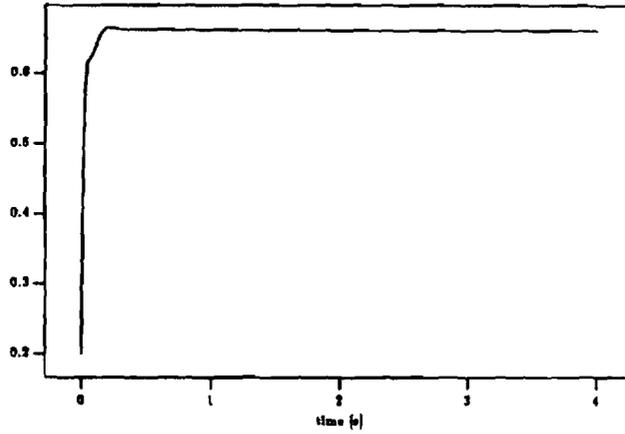


Figure 1. Time response of armature current for adaptive dynamically controlled DC motor example.

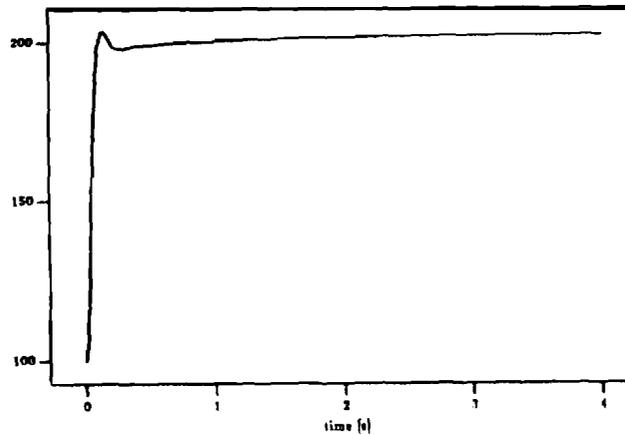


Figure 2. Time response of angular velocity for adaptive dynamically controlled DC motor example.

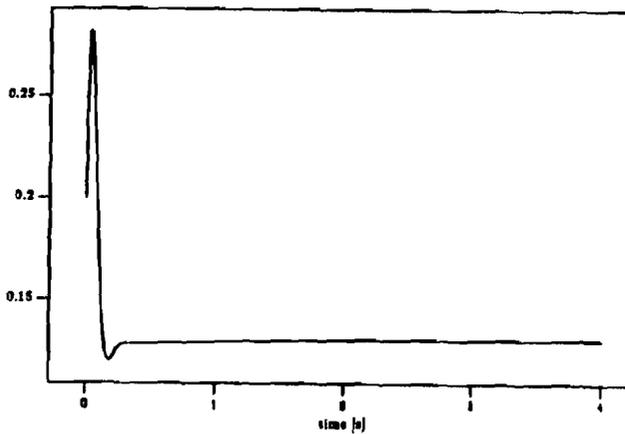


Figure 3. Time response of field winding input current for adaptive dynamically controlled DC motor example.

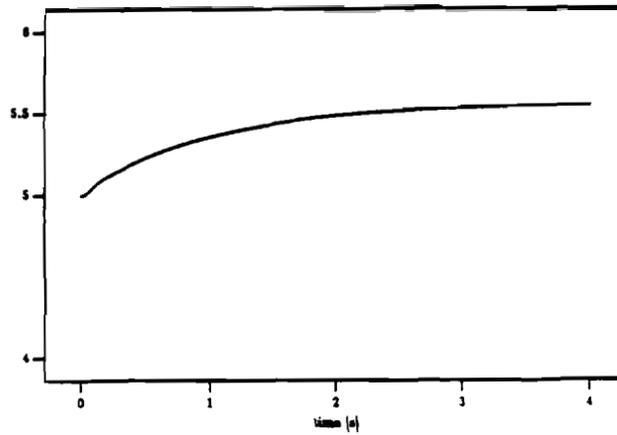


Figure 4. Parameter estimate trajectory for adaptive dynamically controlled DC motor example.

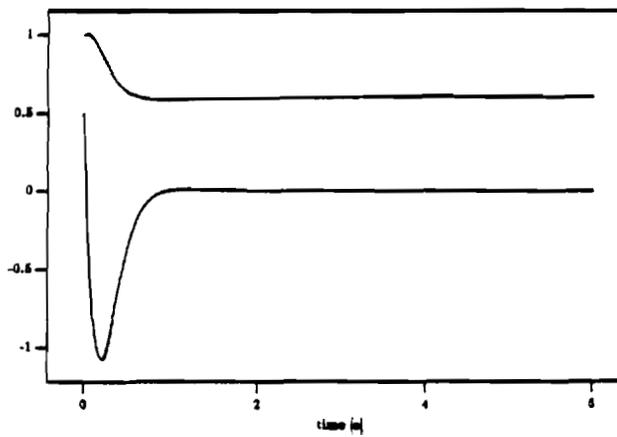


Figure 5. Time response of states variables for adaptive dynamical sliding mode controlled magnetic suspension system example.

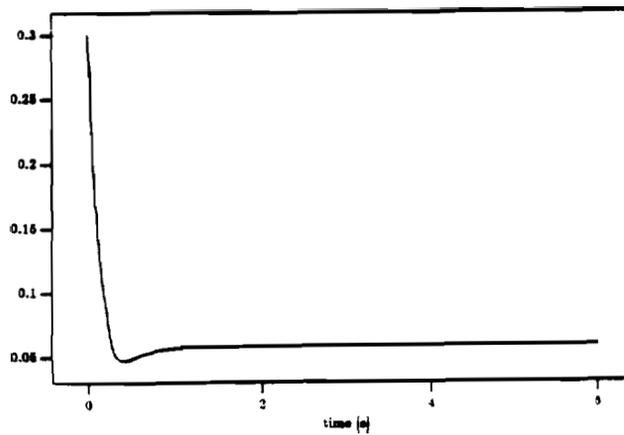


Figure 6. Time response of control input variable for adaptive dynamical sliding mode controlled magnetic suspension system example.

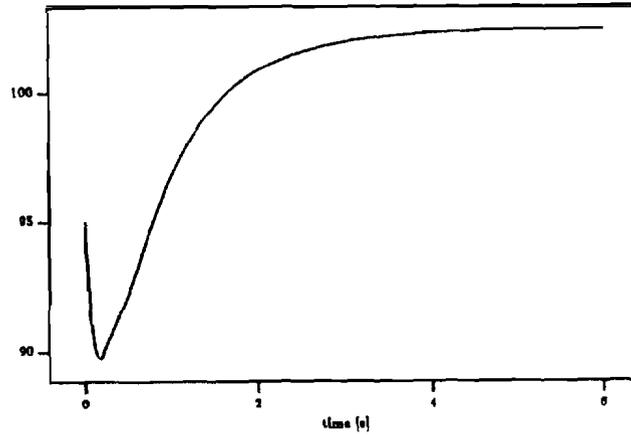


Figure 7. Parameter estimate trajectory for adaptive dynamical sliding mode controlled magnetic suspension system example

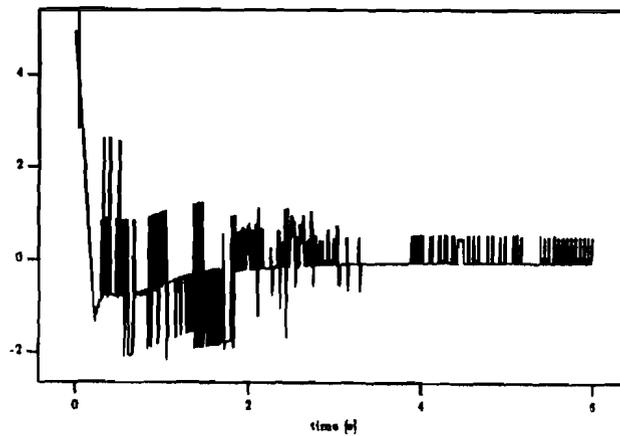


Figure 8. Evolution of sliding surface coordinate function for adaptive dynamical sliding mode controller in the magnetic suspension system example.

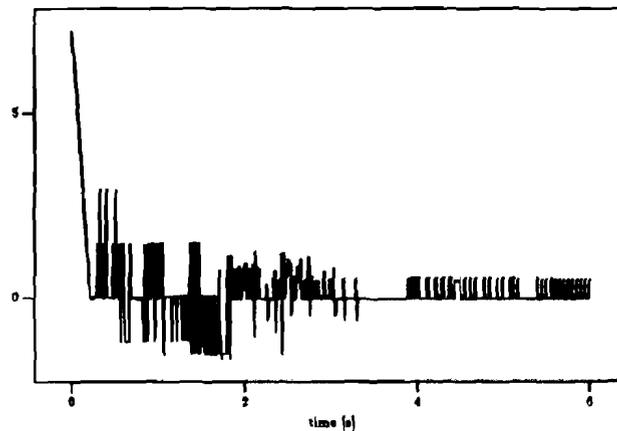


Figure 9. Evolution of estimate values of sliding surface coordinate function for adaptive dynamical sliding mode controller in the magnetic suspension system example.