

2008

Experimental Analysis of Solar Refrigeration System

Sanjaykumar A. Borikar
KITS Ramtek

Uday S. Wankhede
G. H. Rasoni College of Engineering

Follow this and additional works at: <http://docs.lib.purdue.edu/iracc>

Borikar, Sanjaykumar A. and Wankhede, Uday S., "Experimental Analysis of Solar Refrigeration System" (2008). *International Refrigeration and Air Conditioning Conference*. Paper 999.
<http://docs.lib.purdue.edu/iracc/999>

This document has been made available through Purdue e-Pubs, a service of the Purdue University Libraries. Please contact epubs@purdue.edu for additional information.

Complete proceedings may be acquired in print and on CD-ROM directly from the Ray W. Herrick Laboratories at <https://engineering.purdue.edu/Herrick/Events/orderlit.html>

Experimental Analysis of Solar Refrigeration System

Sanjaykumar A Borikar¹, Uday S Wankhede²

¹Kavikulguru Institute of Technology and Science, Ramtek, Department of Mechanical Engineering,
Nagpur, Maharashtra State, India
sanjay0706@gmail.com

² G. H. Rasoni College of Engineering, Nagpur, Department of Mechanical Engineering,
Nagpur, Maharashtra State, India
udaywankhede@yahoo.co.in

1. Abstract

Solar energy is one of the most promising energy sources that can replace the conventional energy sources at no or low cost. In current times most part of the available energy sources is utilized for satisfying the refrigeration and air conditioning needs, which increase the burden on fuel and other sources. Solar refrigeration is a cost-efficient alternative for refrigeration during the daytime.

This paper explains the prototype 40-litre solar refrigerator designed and developed for monitoring its performance in Indian climate and evaluates economic feasibility and affordability in domestic, commercial and industrial applications. The test results obtained shows that the prototype setup confirms the cooling abilities and thus makes it suitable for refrigeration in domestic and commercial area.

2. Introduction

Solar energy finds its applications in the diversified areas like solar refrigeration, solar pumping, solar water heating, solar drying, solar photovoltaic lighting system etc. These systems are more popular because of they provides lot more benefits to the user in terms of cost, maintenance, portability, performance and usability. These systems can be used with or without any storage equipments.

This prototype solar refrigeration system refrigerator uses the photovoltaic power for performing its operations. The system is designed with battery storage for enhancing the performance of the refrigerator. The system consists of 40 litres of refrigerator box. The refrigerator consists of 48-watt, AC compressor. The compressor get power from battery though inverter. Inverter converts the 12V dc supply into 260V ac supply by amplifying the voltage. The photovoltaic panels are directly connected to the 12-volt battery. The battery stores current coming from solar panel.

3. Mathematical Modelling of Solar Refrigerator

3.1 Problem Formulation

In formulation for our prototype refrigerator (Figure 3.1) we have concentrated on the following factors...

1. The natural convection heat transfer mode is considered.
2. The refrigerator cabinet has been divided into vertical and horizontal surfaces.
3. Pressure variations in the direction perpendicular to the plate are neglected.
4. The viscous forces are assumed to be negligible.
5. The radiation heat transfer to the cabinet is neglected.

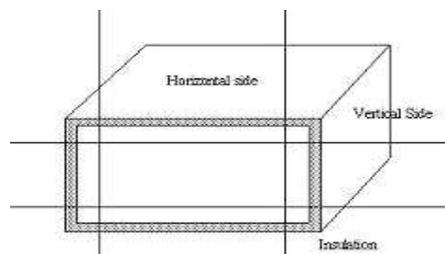


Figure 3.1: Refrigerator box

The formulation requires the determination of heat transfer coefficient of air inside and outside of the refrigerator cabinet that concerns with the horizontal and vertical surfaces and the total amount of heat transfer inside and outside of the refrigerator for deciding the cooling load. For analysing the cooling load and for mathematical modelling of refrigerator, we selected the method of boundary layer analysis for natural convection.

3.2 Heat transfer coefficient of outside air on vertical surface

Assume the flow of air is laminar over the flat vertical surface (Figure 3.2). Thus the continuity, momentum and energy equations are...

$$N_{um} = 0.68 + 0.678R_a^{\frac{1}{4}} \frac{1}{\left[1 + \left(\frac{0.492}{Pr}\right)^{\frac{9}{16}}\right]^{\frac{4}{9}}} \quad \text{at } R_a < 10^9$$

The heat transfer coefficient of outer air is given by $h_x = \frac{N_u k}{L}$

and the heat transfer rate is given by $Q = UA\Delta T$; $Q = \frac{\Delta T}{R} = \frac{T_{out} - T_{surf}}{R}$

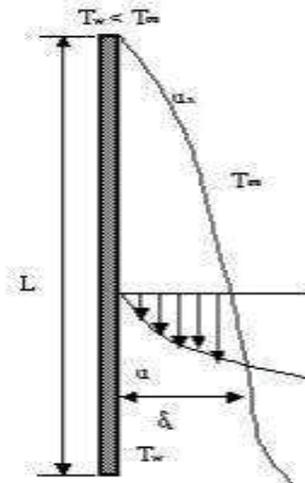


Figure 3.2: Thermal boundary layer on vertical surface heat transfer coefficient of outside air

3.3 Heat transfer through refrigerator wall

Refrigerator wall consists of insulation packed between two mild steel plates. To determine the heat transfer rate through wall we apply the principle of Cartesian coordinate for conduction heat transfer (Figure 4.3).

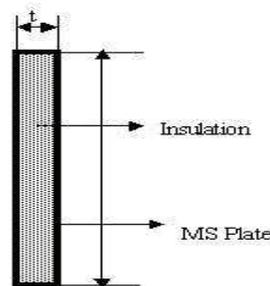


Figure 3.3: Heat transfer through wall

The heat transfer through the refrigerator wall is given by

$$Q = \frac{\Delta T}{R} \quad R = \frac{2L_{msplate}}{k_{msplate}A} + \frac{L_{insul}}{k_{insul}A}$$

3.4 Heat transfer coefficient of inside air on vertical surface

The mathematical model for heat transfer coefficient of inside air along the vertical surface (Figure 3.4) is same as that of outside air, only difference is that the $T_w > T_\infty$

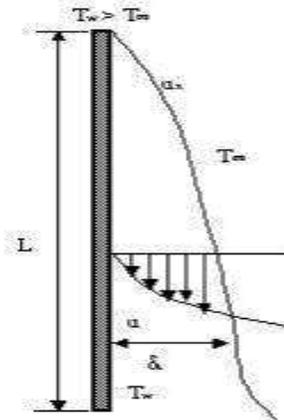


Figure 3.4: Thermal boundary layer on vertical surface heat transfer coefficient of inside air

$$G_r = \beta g \frac{T_{wi} - T_{\infty i}}{\vartheta^2} L^3 \quad P_r = \frac{\mu C_p}{k} \quad N_{um} = 0.68 + 0.678 R_a^{\frac{1}{4}} \frac{1}{\left[1 + \left(\frac{0.492}{P_r} \right)^{\frac{2}{16}} \right]^{\frac{4}{9}}}$$

Thus, heat transfer coefficient of inside air is given by $h_{ix} = \frac{N_u k}{L}$

3.5 Heat transfer coefficient of outside air on horizontal surface

For determining the mathematical expressions the method of boundary layer equation is considered on horizontal surface (Figure 3.5).

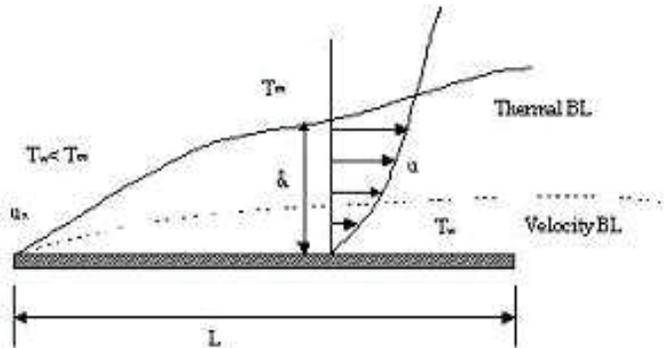


Figure 3.5: Thermal boundary layer on horizontal surface

The Nusselt number for free convection over horizontal surface is

$$Nu_u = 0.13(G_r P_r)^{\frac{1}{3}} \quad \text{at } G_r P_r < 2 \times 10^8 \quad \text{thus} \quad Nu_u = 0.13 R_a^{\frac{1}{3}}$$

The heat transfer coefficient is $h_x = \frac{Nu_u k}{L}$

Total heat transfer rate (total cooling load) is obtained as

$$Q_{total} = 3Q_{vertical} + 2Q_{horizontal}$$

Other parameters are computed as

$$k_{ins} = 0.155 \text{ w/mK} \quad k_{msp} = 11 \text{ w/mK}$$

$$\text{Area of vertical surface} = A_{vert} = 0.0968 \text{ m}^2$$

$$\text{Area of horizontal surface} = A_{horz} = 0.193 \text{ m}^2$$

The total heat transfer rate equation can be expressed as

$$Q_{total} = 3 \frac{\Delta T}{R_v} + 2 \frac{\Delta T}{R_H}$$

Taking into consideration the heat leakage and the required TR of cooling, it is estimated that the prototype refrigerator for **120W cooling load** capacity needs to be designed.

4. Performance Testing

The refrigerator was operated using an AC compressor and draws power from storage battery through inverter, which converts the 12V DC in 260V AC supply, by amplifying the voltage. The battery is connected to the photovoltaic panels. For testing, 48W panels are used with current ratings of 1.9 to 2 amps–hr and voltage ratings of 19 to 24V. The system performance (Figures 4.3 to 4.7) in hot and humid conditions of Nagpur (INDIA) at an average surrounding condition of 42°C are summarized below

Time (min)	Voltage (V)	Current (Amps)	Ambient Temperature (°C)	Watt Stored	Watt-hr
0	19	1.9	42	36.1	32.08
15	18	1.9	42	34.2	
30	19	1.9	43	36.1	
45	18	1.2	43	32.4	
60	18	2	42	21.6	
75	20	2	42	40	37.55
90	19	2	42	38	
105	19	1.9	45	38	
120	18	1.9	45	34.2	
135	18	1.8	45	34.2	
150	16	1.9	43	28.8	33.325
165	18	1.9	44	34.2	
180	19	1.2	44	36.1	
195	17	1.8	43	20.4	
210	20	1.8	43	36	
225	19	1.92	43	34.2	31.29
240	18	1.8	43	34.56	
255	18	1.79	43	32.4	
270	20	1.4	42	35.8	
285	19	1.4	42	26.6	
300	19.5	1.6	42	27.3	30.252
315	19.5	1.6	41	31.2	
330	19.5	1.6	41	31.2	
345	18	1.6	41	38.8	
360	18	1.55	41	27	
375	19	1.9	42	36.1	32.05
400	18	1.9	42	34.2	

Figure 4.1: Testing with battery charging with solar panels

Time (min)	T _i (°C)	Pressure (psi)		Voltage (V)	Current (Amp)	T _i (°C)		T _e (°C)		COP
		P _s	P _e			(T _{co})	(T _{ci})	(T _{eo})	(T _{ei})	
0	34	200	15	240	1.2	32	40	54	30	2.48
5	30	200	17	240	1.25	33	49	30	20	3.05
10	26	210	17	230	1.2	33	55	26	18	2.73
15	20	210	17	230	1.2	33	60	20	11	2.60
20	15	210	18	230	1.2	37	62	15	11	2.53
25	11	210	18	230	1.2	37	62	11	08	2.83
30	10	230	18	230	1.2	38	61	10	08	2.58
35	05	230	20	231	1.2	39	61	05	06	2.55
40	01	230	20	230	1.2	39	62	01	06	2.58
45	-01	230	20	230	1.2	39	61	-01	06	2.55
50	-03	230	23	230	1.2	39	62	-03	05	2.45
55	-05	240	23	230	1.2	33	62	-05	07	2.62
60	-06	245	23	230	1.2	33	61	-06	05	2.54
65	-09	245	23	230	1.2	33	64	-09	01	2.78
70	-09	245	26	230	1.2	40	62	-09	01	2.60
75	-10	250	26	230	1.2	40	62	-10	01	2.65
80	-10	250	27	230	1.2	40	61	-10	-01	2.75
85	-11	250	27	230	1.2	40	60	-11	-01	2.89
90	-12	250	27	230	1.2	41	60	-12	-02	2.74
95	-13	250	29	230	1.2	41	61	-13	-03	2.83
100	-13	250	29	230	1.2	42	63	-13	-03	2.75
105	-14	255	30	230	1.2	42	61	-14	-05	2.77
110	-14	255	30	230	1.2	43	62	-14	-06	2.71
115	-15	255	30	230	1.2	44	61	-15	-07	2.93
120	-15	260	30	230	1.2	44	60	-15	-07	2.93
125	-15	260	30	230	1.2	44	60	-15	-08	3.38
130	-15	260	31	230	1.2	43	61	-15	-08	3.38
135	-15	260	31	230	1.2	43	61	-15	-09	3.38

Figure 4.2: Testing with battery storage at ambient temperature

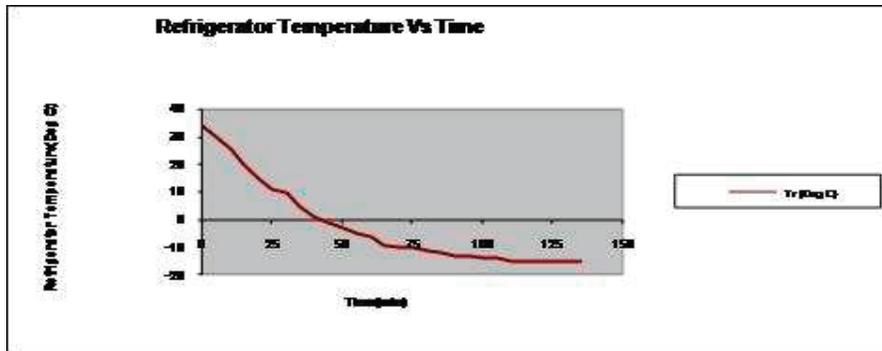


Figure 4.3

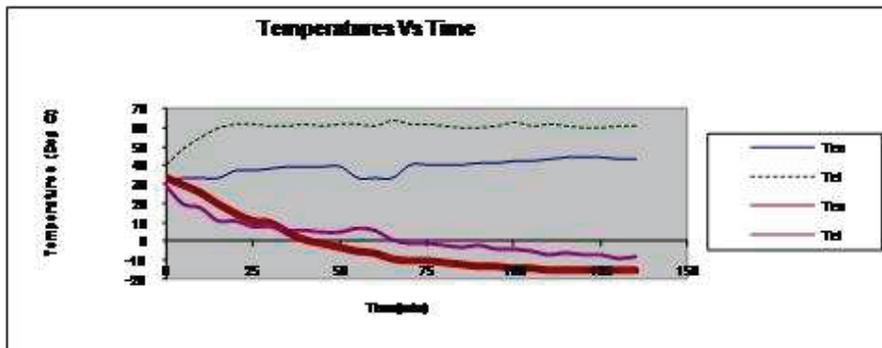


Figure 4.4

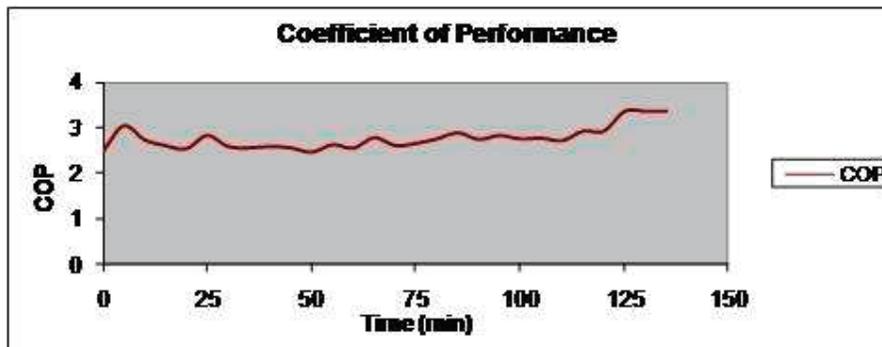


Figure 4.5

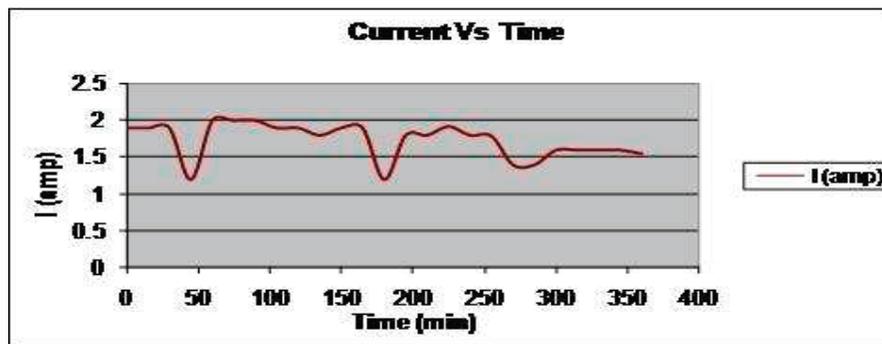


Figure 4.6

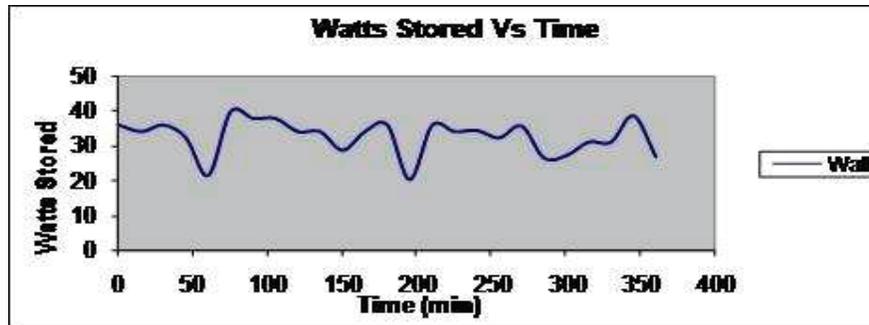


Figure 4.7

5. Economic Analysis

For Economic analysis of solar refrigerator following electricity tariff rates according to the consumer designated by MSEB were considered (as in effect during May-2007).

Consumer	Demand		Tariff Rates (Rs) (per unit)
	Units	Charges (Rs)	
Domestic	0 – 100	40 per month	1.90 + Fuel Charges
	101 – 300	100 per month	3.40+ Fuel Charges (0.40)
	301 above	100 per 10KVA	4.50+ Fuel Charges
Commercial	0 – 100	150 per month	2.90+ Fuel charges
	101–200	150 per month	3.79+ Fuel charges
	201above	150 per KVA	4.90+ Fuel charges (0.80)
Industrial	0-100	200 per KVA	9.70+ Fuel charges (0.50)

Consumption of electricity (in watts) = Wattage consumed * Operating hours

It is found that the compressor requires **276VA** continuously for performing its function. Taking into consideration the time for which solar radiation is available (typically 7 hours)

Energy consumed by refrigerator = 1932 watts (1.932 units)

Energy consumed in an year = 708.180 units

Cost of electricity for refrigeration = units consumed *(tariff rate + fuel charge) + fixed demand charges

In domestic area = Rs.3891.08 per year (fixed demand charge = Rs. 100 per month)

In Commercial area = Rs.5836.63 per year (fixed demand charge = Rs. 150 per month)

In Industrial area = Rs 7223.44 per year

The total cost of the solar refrigerator is Rs. 49170.00. Thus, the payback periods for different operating sectors are as summarized below

In domestic area = 12.64 years

In Commercial area = 8.42 years

In Industrial area = 6.81 years

6. Conclusion

Solar refrigeration system is the need of future. It is not too far that the world will face the scarcity of energy resources to satisfy the need of energy as well as the need of refrigeration. This demands an efficient and effective use of alternative sources of energy and directed efforts towards their optimum utilization. One of the most promising resources of renewable energy is solar energy, which is available in ample amount at no cost.

The experimental analysis of the prototype setup developed by us suggests that the system performs well at the ambient average temperature of 20-44°C. This approach to refrigeration is a viable solution for the commercial as well as industrial use but is a costly for domestic use.

7. Nomenclature

A	Area of surface (m ²)
C _p	Specific heat (kJ/kg-K)
COP	Coefficient of performance
G _r	Grashof's number
g	The gravitational acceleration (N/m ²)
h _i	Heat transfer coefficient of the inside air (W/m ² K)
h _o	Heat transfer coefficient of the outside air (W/m ² K)
h _x	Heat transfer coefficient of the air (W/m ² K)
K	Thermal conductivity of air (W/mK)
K _{ms}	Thermal conductivity of steel plate (W/mK)
K _{ins}	Thermal conductivity of insulation (W/mK)
L	Length of flat surface (m)
L _{ms}	Thickness of steel plate (m)
L _{ins}	Thickness of insulation (m)
N _u	Nusselt number
N _m	Mean Nusselt number
P	Ambient pressure (bar)
P _c	Condenser pressure (psi)
P _e	Evaporator pressure (psi)
P _r	Prandlt number
Q	Heat flow rate (W)
Q _h	Heat flow rate through horizontal surface (W)
Q _t	Total heat flow rate (W)
Q _v	Heat flow rate through vertical surface (W)
R	Thermal resistance (K/W)
R _a	Rayleigh number
T _c	Condenser temperature (°C)
T _{ci}	Condenser inlet temperature (°C)
T _{co}	Condenser outlet temperature (°C)
T _e	Evaporator temperature (°C)
T _{ei}	Evaporator inlet temperature (°C)
T _{eo}	Evaporator outlet temperature (°C)
T _i	Inside Temperature (°C)
T _o	Temperature of ambient air (°C)

T_s	Surface temperature ($^{\circ}\text{C}$)
T_w	Wall temperature ($^{\circ}\text{C}$)
U	Overall heat transfer coefficient ($\text{W}/\text{m}^2\text{K}$)
β	Biot number
μ	Dynamic viscosity (Ns/m^2)
ν	Kinematic viscosity ($\text{Ns}\cdot\text{m}/\text{kg}$)
ΔT	Temperature difference ($^{\circ}\text{C}$)
δ_t	Thermal boundary layer thickness (m)
ρ	Density of air (kg/m^3)

8. References

1. Michael K. Ewert, David J. Bergeron, Robert E. Foster, Oral LaFleur, "Photovoltaic Direct-Drive, Battery-Free Refrigerator Field Test", ISES, Mexico city, September 2000.
2. Robert E. Foster, Luis Extreda, David Bergeron, "Photovoltaic Direct Drive Refrigerator with Ice Storage: Preliminary Monitoring Result", Solar World Congress, ISES 2001.
3. Lyndon B. Johnson, "Vapor Compression Solar Refrigerator without Batteries", Space Center, Houston, Texas.
4. Per Henrik Pedersen, Soren Poulsen & Ivan Katic, "Solar-Chill- A Solar PV Refrigerator without Battery", ISES, February 2004.
5. M. N. Ozisik, "Heat Transfer A Basic Approach", TATA McGraw-Hill Publication.
6. J. P. Holman, "Heat Transfer", TATA McGraw-Hill Publication.
7. O. Laguerre, D. Flick, "Heat Transfer By Natural Convection in Domestic Refrigerator", Journal of Food Engineering, May 2003.
8. Rosenthal, R. Foster, "New Applications for Photovoltaics", Southwest Region Solar Experiment Station - Southwest Technology Development Institute College of Engineering - New Mexico State University.
9. Sanford A. Klein, Douglas T. Reindl, "Solar Refrigeration", ASHRAE Journal, Vol. 47, No. 9, September 2005.
10. David Bergeron, "Solar Powered Refrigeration for Transport Applications", SAND2001-3753 Unlimited Release, December 2001
11. Wimolsiri Pridasawas, "Solar-Driven Refrigeration Systems with Focus on the Ejector Cycle", KTH Industrial and Management, Stockholm, October 2006

Acknowledgements

The authors would like to thank the management and the staff of RAC laboratory at G. H. Raison College of Engineering, Nagpur for their support and assistance. The acknowledgements are also due to the management and staff at Kavikulguru Institute of Technology and Science, Ramtek for their constructive and encouraging comments.