

7-2002

Investigation of the Vibrational Modes of Edge-Constrained Fibrous Samples Placed in a Standing Wave Tube

Bryan H. Song
NASA-Kennedy Space Center

J Stuart Bolton
Purdue University, bolton@purdue.edu

Follow this and additional works at: <http://docs.lib.purdue.edu/herrick>


Song, Bryan H. and Bolton, J Stuart, "Investigation of the Vibrational Modes of Edge-Constrained Fibrous Samples Placed in a Standing Wave Tube" (2002). *Publications of the Ray W. Herrick Laboratories*. Paper 78.
<http://docs.lib.purdue.edu/herrick/78>

This document has been made available through Purdue e-Pubs, a service of the Purdue University Libraries. Please contact epubs@purdue.edu for additional information.

INVESTIGATION OF THE VIBRATIONAL MODES OF EDGE-CONSTRAINED FIBROUS SAMPLES PLACED IN A STANDING WAVE TUBE

Bryan H. Song
NASA-Kennedy Space Center

J. Stuart Bolton
Ray W. Herrick Laboratories
Purdue University

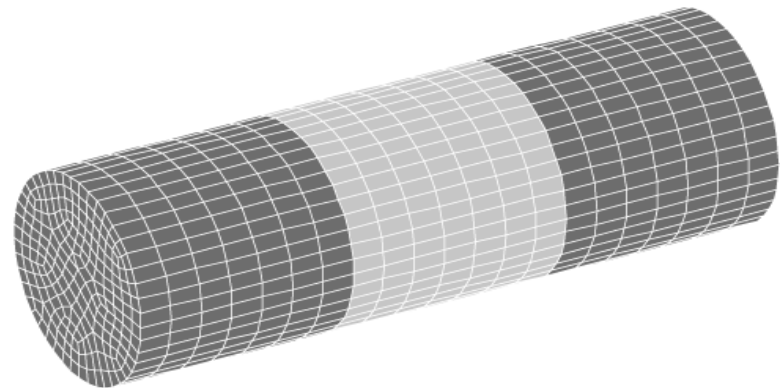

Purdue University



Herrick Laboratories

Background

- Measurement of the surface normal velocity of vibrating panels or plates [Kruger and Mann (1999) and Muller and Moslehy (1996)]
- Estimation of the mechanical properties (Young's modulus and Poisson's ratio) of foam materials by the laser vibration measurement [Mariez et al. (1996) and Dubbelday (1992)]
- **Electromagnetic approach** for measuring the vibrational velocity of the frame of flexible porous materials (Khirnykh and Cummings, 1999)

Introduction

- Investigation of edge constraint effect on samples placed in a modified standing wave tube (J. S. Bolton et al., SAE 1997; B. H. Song et al., JASA 1999).
- Internal constraints may be used to selectively enhance the transmission loss of lining materials at low frequencies (B. H. Song et al., JASA 2001).
- Implications for design of low frequency noise control barriers following from constraint of porous lining materials around their edges.


Glass Fiber Material inside of Sample Holder



Four Microphone Measurement



Transfer Matrix Approach I

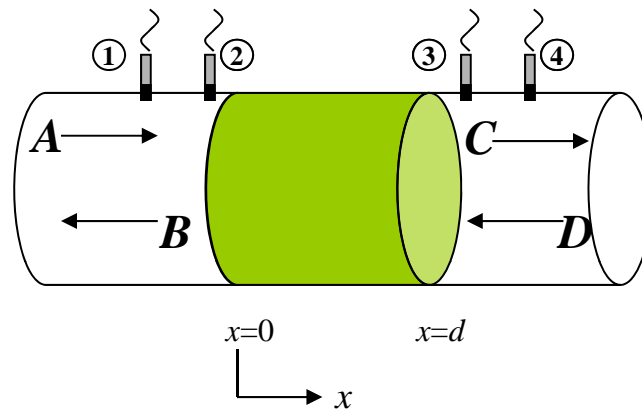


$$\begin{bmatrix} P \\ V \end{bmatrix}_{x=0} = \begin{bmatrix} T_{11} & T_{12} \\ T_{21} & T_{22} \end{bmatrix} \begin{bmatrix} P \\ V \end{bmatrix}_{x=d}$$

$$T_{11} = T_{22}$$



symmetry

$$T_{11}T_{22} - T_{12}T_{21} = 1$$



reciprocity

4 Equations

- **Solve for transfer matrix elements**

Transfer Matrix Approach II

$$\begin{bmatrix} 1 + R_a \\ \frac{1 - R_a}{\rho_0 c_0} \end{bmatrix} = \begin{bmatrix} T_{11} & T_{12} \\ T_{21} & T_{22} \end{bmatrix} \begin{bmatrix} T_a e^{-jkd} \\ \frac{T_a e^{-jkd}}{\rho_0 c_0} \end{bmatrix}$$

- Anechoic Reflection Coefficient**

$$R_a = \frac{T_{11} + \frac{T_{12}}{\rho_0 c} - \rho_0 c T_{21} - T_{22}}{T_{11} + \frac{T_{12}}{\rho_0 c} + \rho_0 c T_{21} + T_{22}} \quad \Rightarrow \quad \alpha = 1 - |R_a|^2$$

$$\frac{z_n}{\rho_0 c} = \frac{1 + R_a}{1 - R_a}$$


- Anechoic Transmission Coefficient**

$$T_a = \frac{2 e^{jkd}}{T_{11} + \frac{T_{12}}{\rho_0 c} + \rho_0 c T_{21} + T_{22}} \quad \Rightarrow \quad TL = 10 \log(1/|T_a|^2)$$

Experimental Setup for Low Frequency Tube




Anechoic Transmission Loss (3" Sample A in a Large Tube)

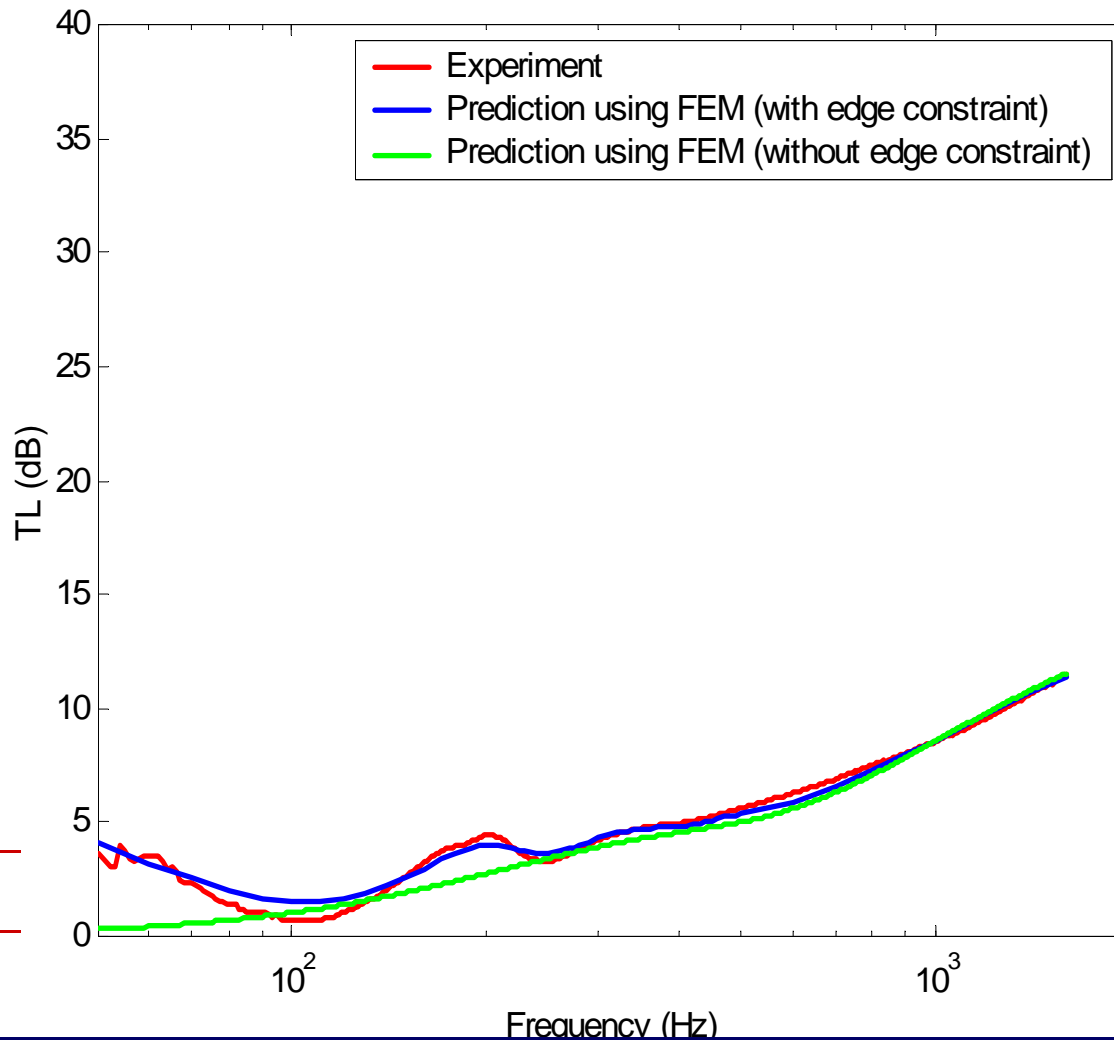


Increase in TL
due to
edge constraint

3 dB




Surface Normal Impedance (3" Sample A in a Large Tube)

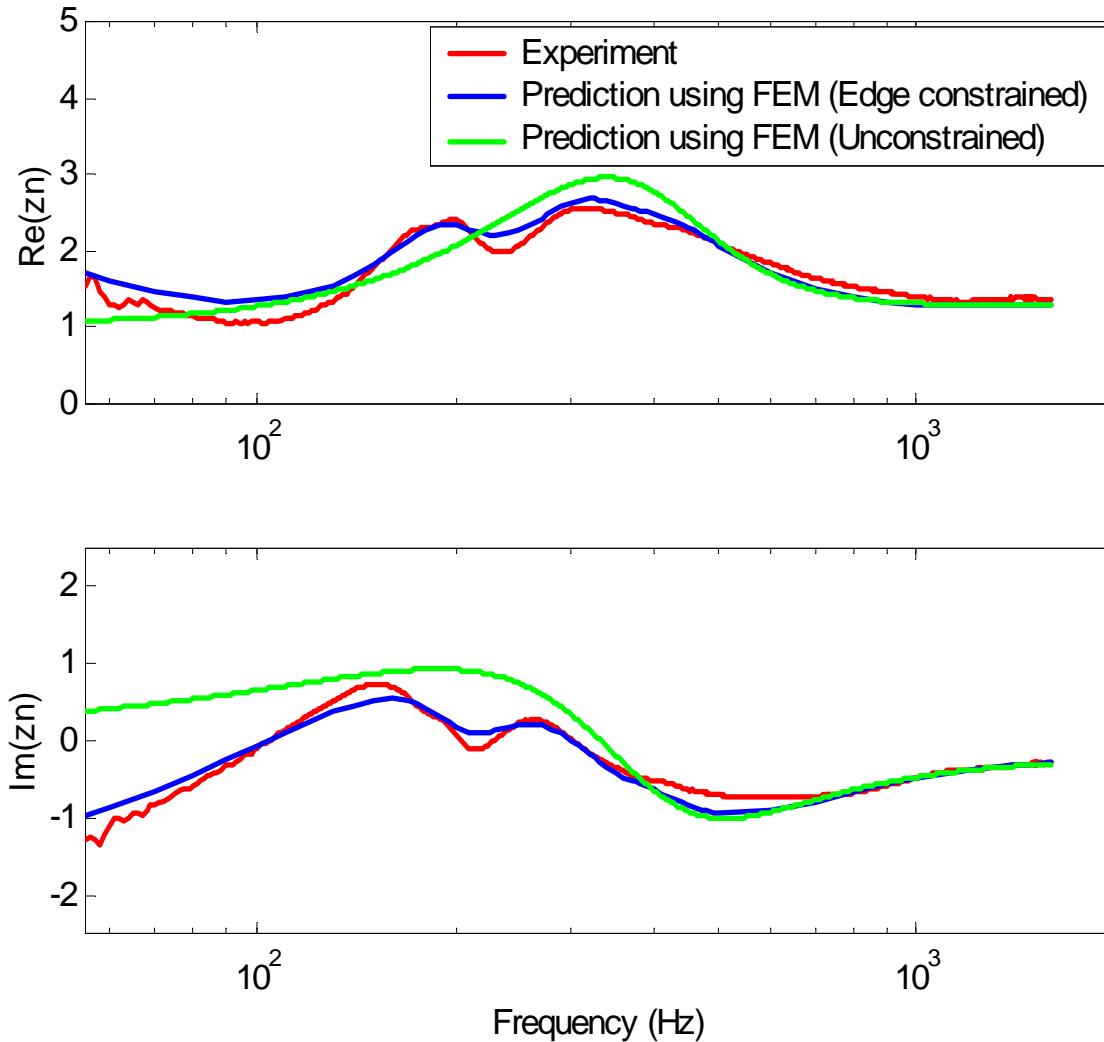


Poroelastic Material Properties used in Calculations


Material	Bulk density (Kg/m³)	Porosity	Tortuosity	Flow resistivity (MKS Rayls/m)	Shear modulus (Pa)	Loss factor
Sample A	6.73	0.99	1.1	21000	1200	0.35

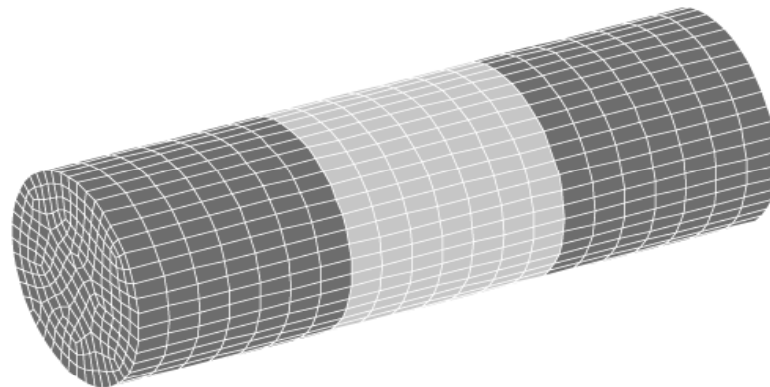


Investigation of Vibrational Modes of Glass Fiber Materials (1" Sample A)

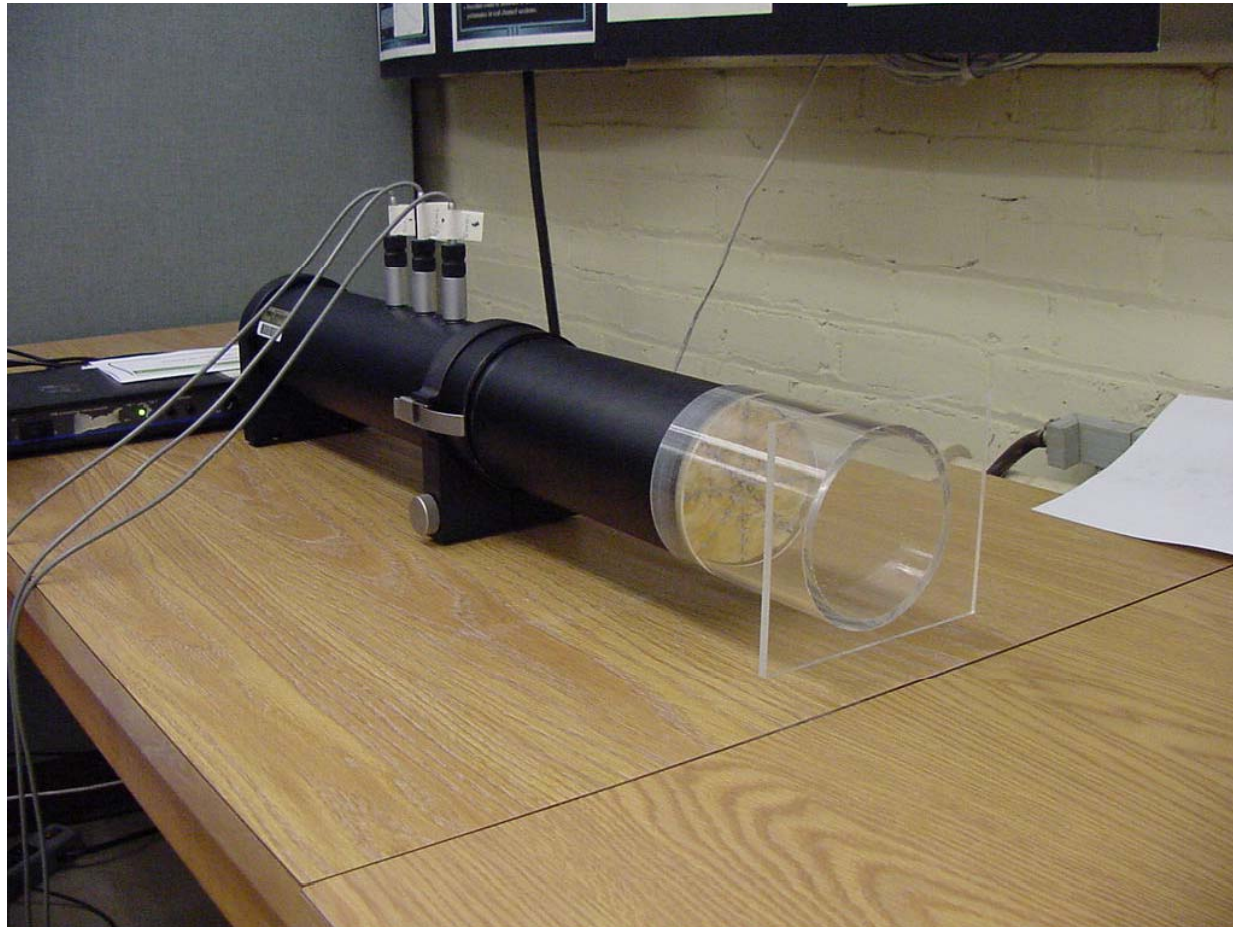

Laser Measurement Setup (Large Tube, 1" Sample A)

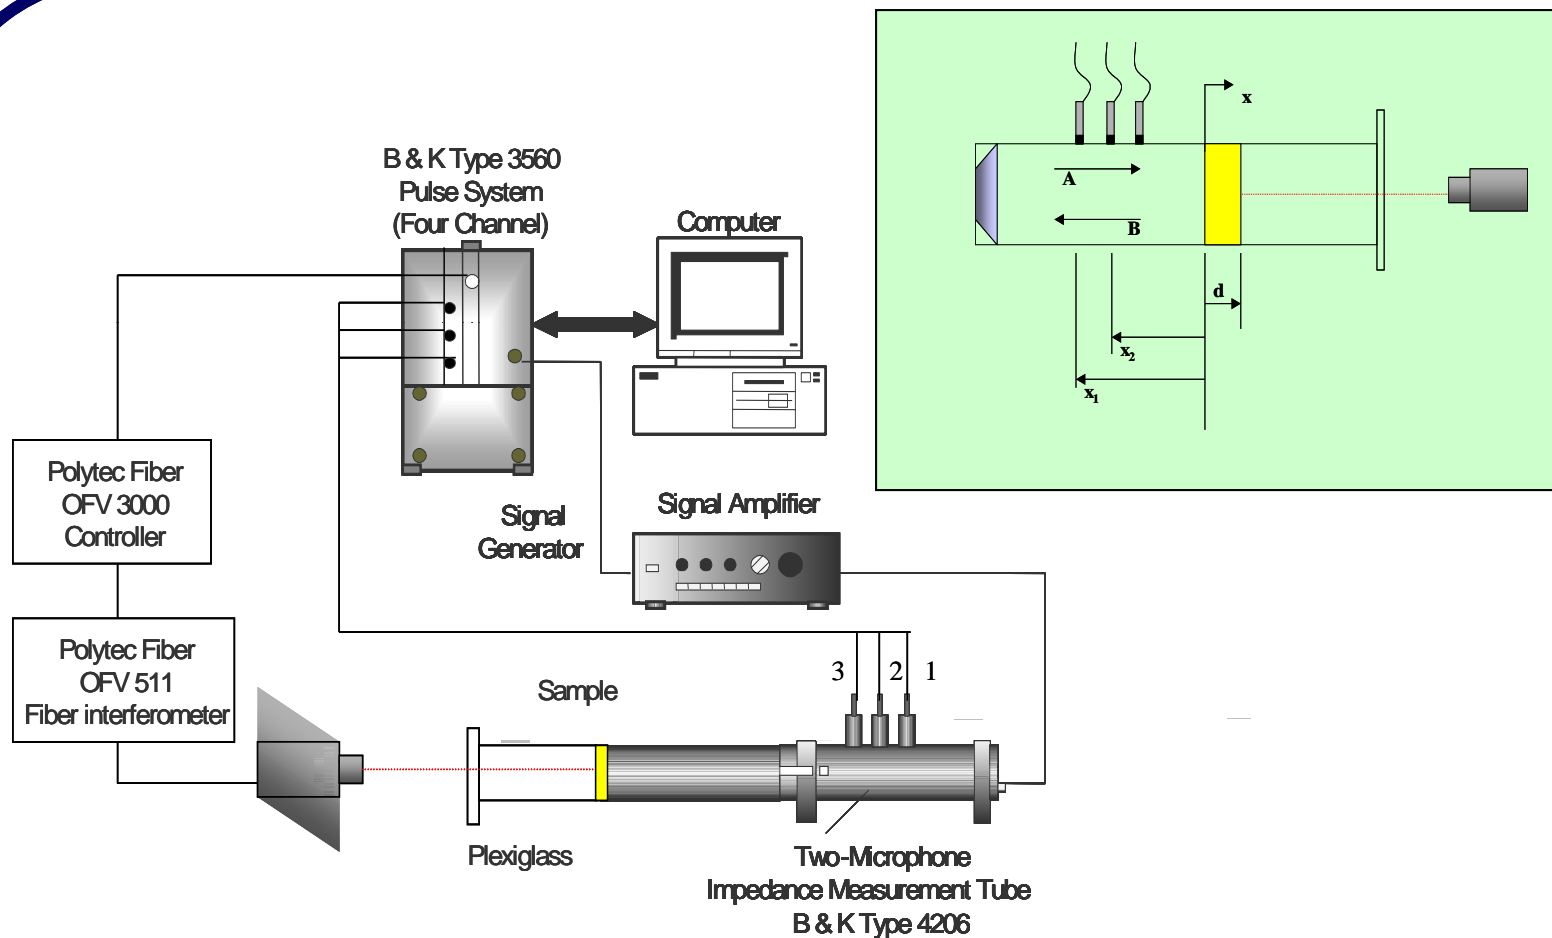


Three-Dimensional Finite Element Model

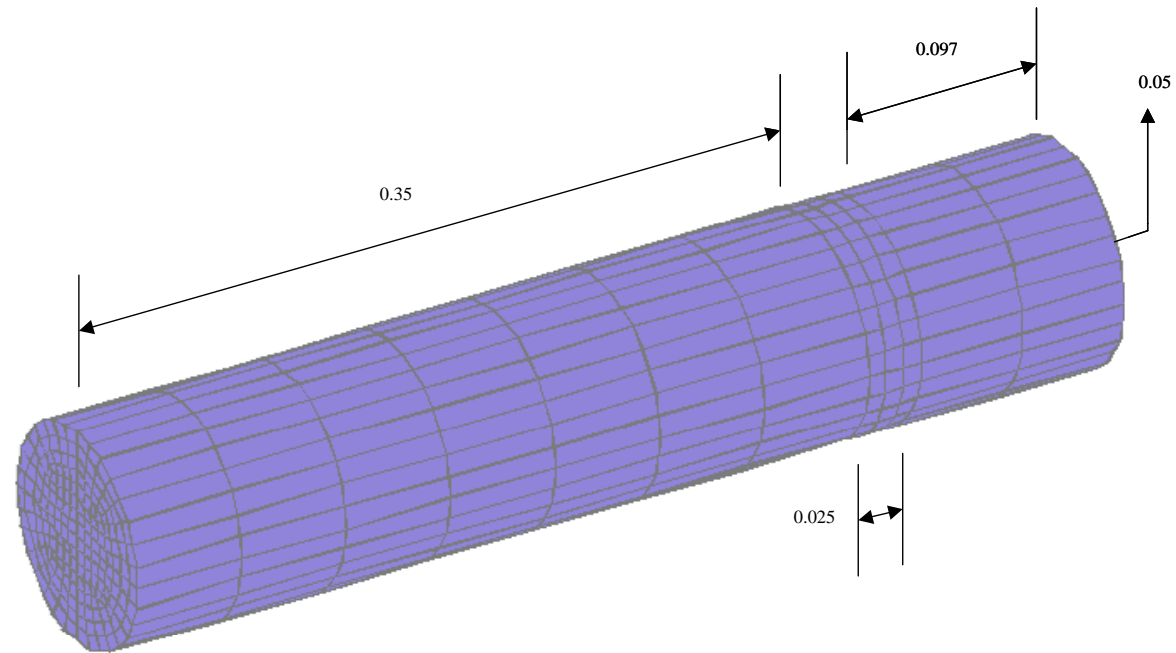



SI Unit [m]

Schematic of Edge- and Plane-Constrained Sample with Reflecting Tapes

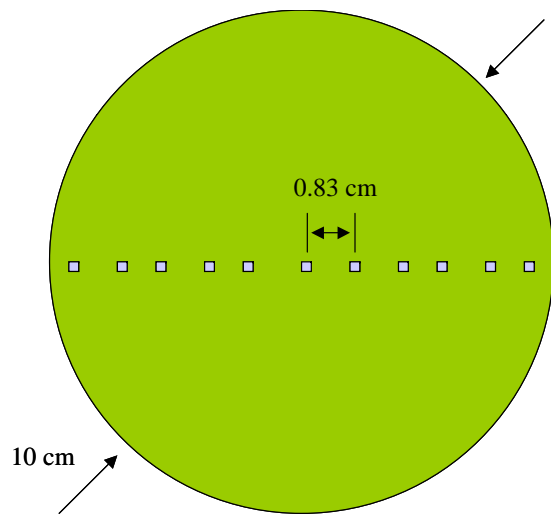

Edge-constrained Sample

Plexiglass

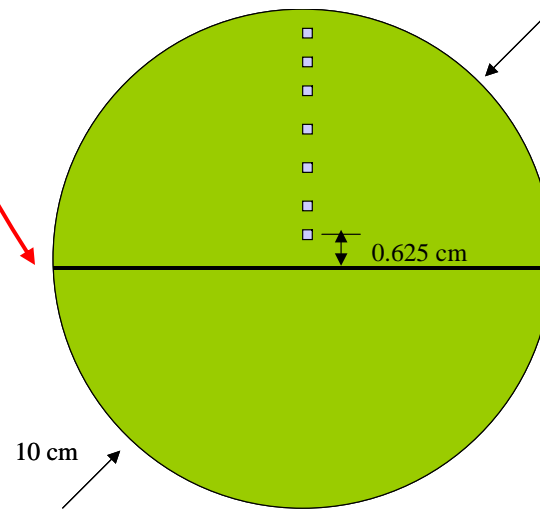


Plane-constrained Sample


Glass Fiber Materials with Reflecting Tape



Effect of Reflecting Tape on TL (1" Sample A)

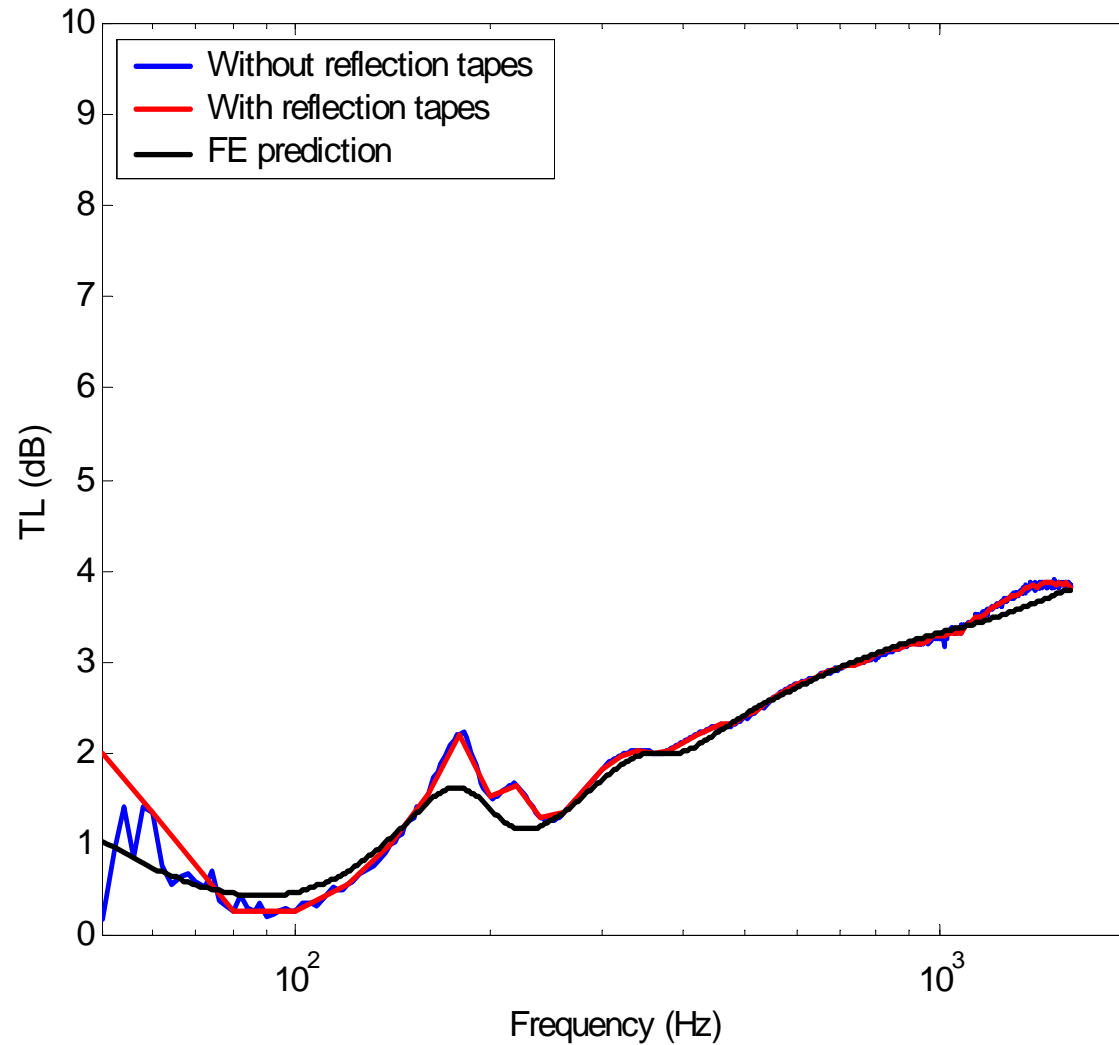


Coherence Between Reference Microphone and the Laser Velocity Signal (1" Sample A)

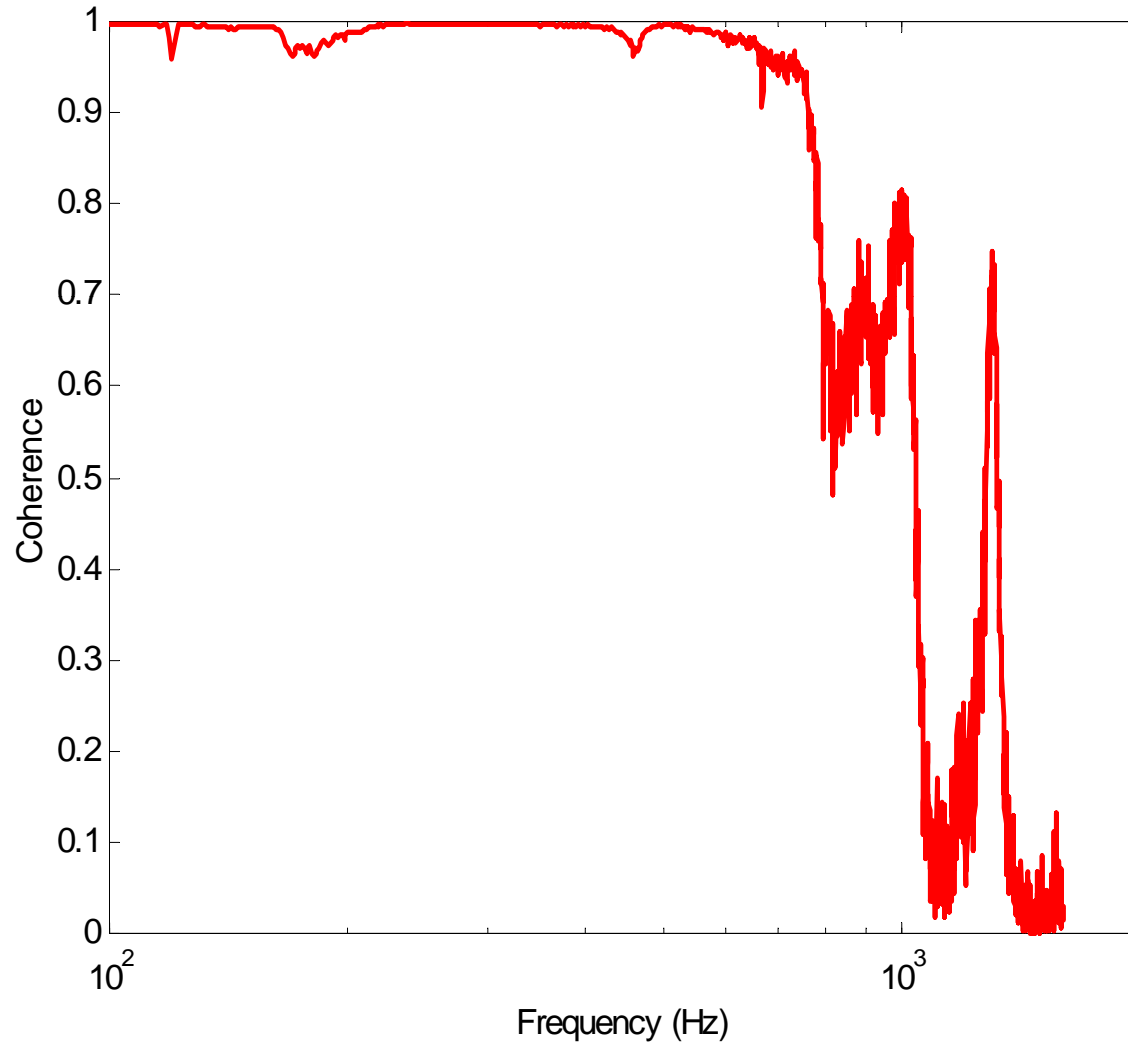


FEM-Predicted Normalized Frame Velocity in Large Tube, Anechoic Termination Case (1")

1" Sample

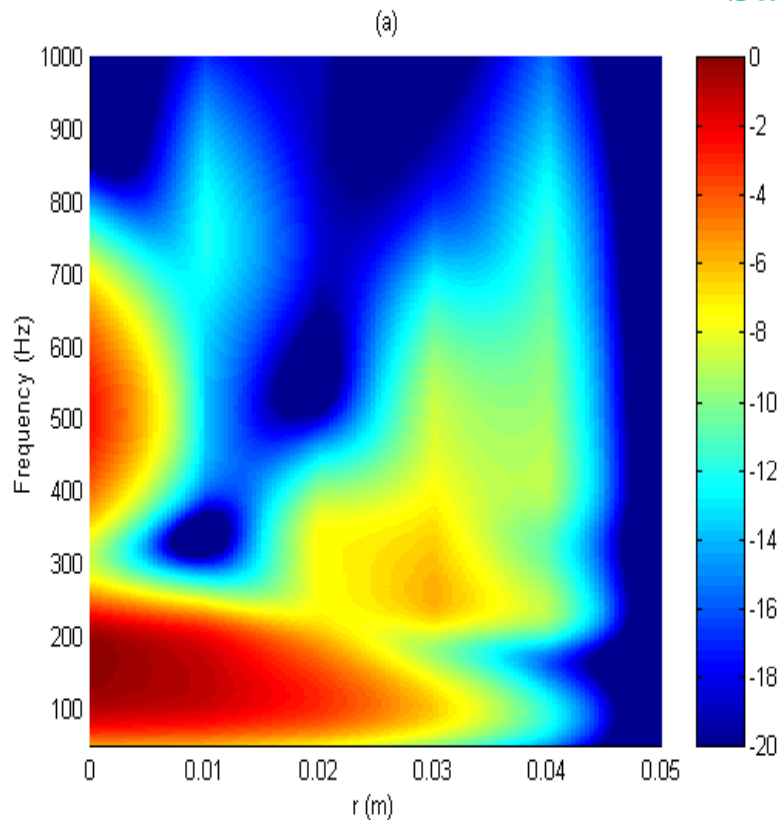

Edge-constrained Sample

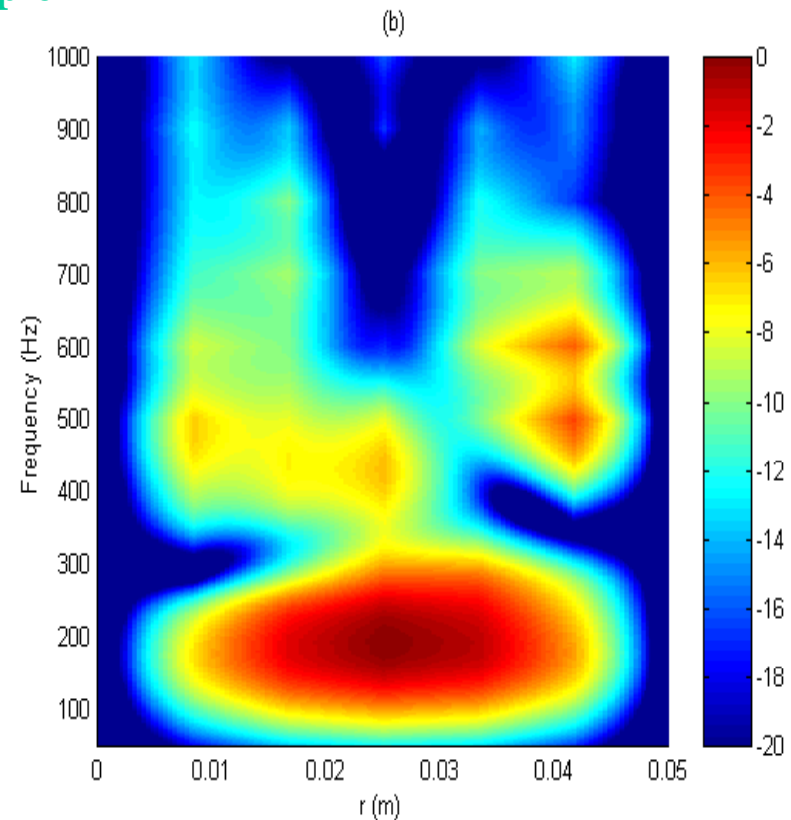



Plane-constrained Sample

The 1st and 2nd Mode Shapes of the Edge-constrained Sample (1")



FEM

Experiment

1st Mode
at 100 Hz

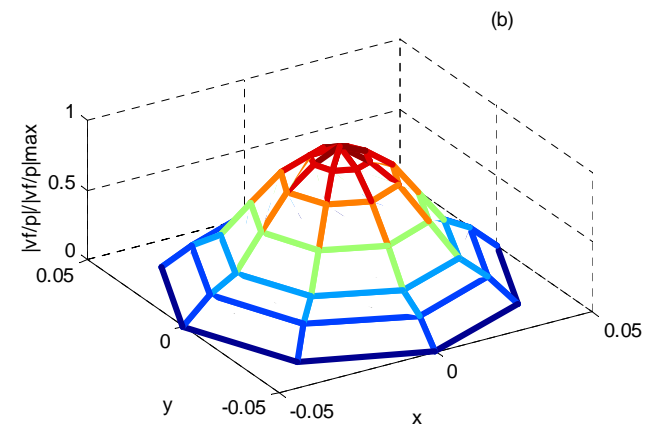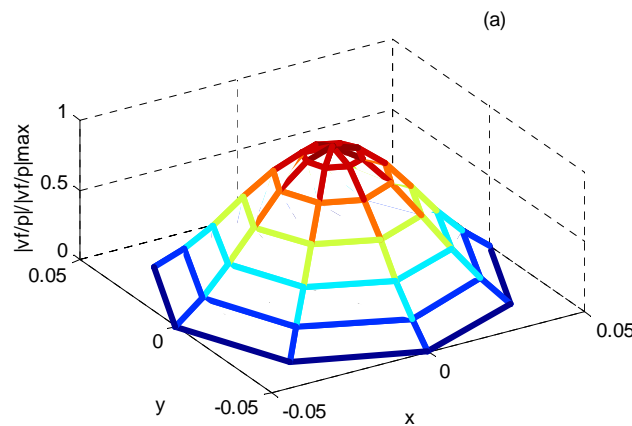

2nd Mode
at 350 Hz

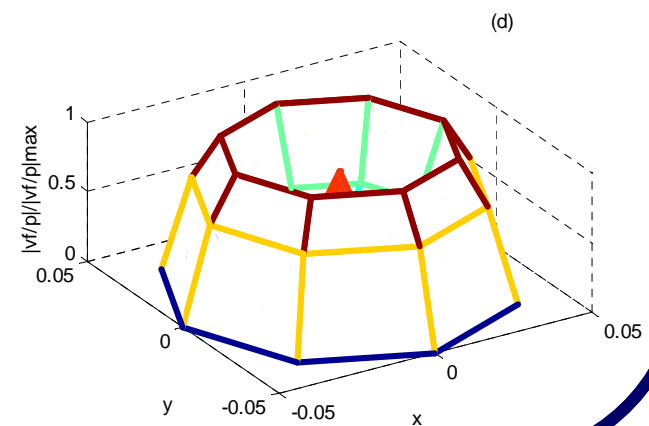
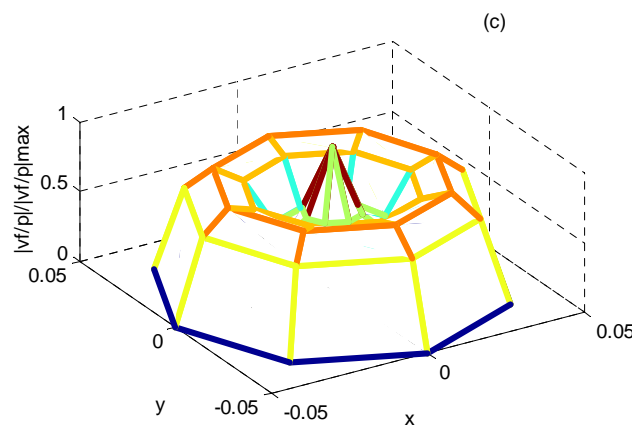


The 1st and 2nd Mode Shapes of the Plane-constrained Sample (1")



FEM

Experiment

1st Mode
at 200 Hz

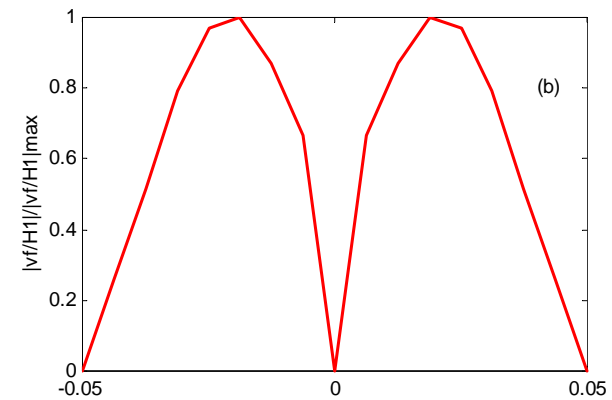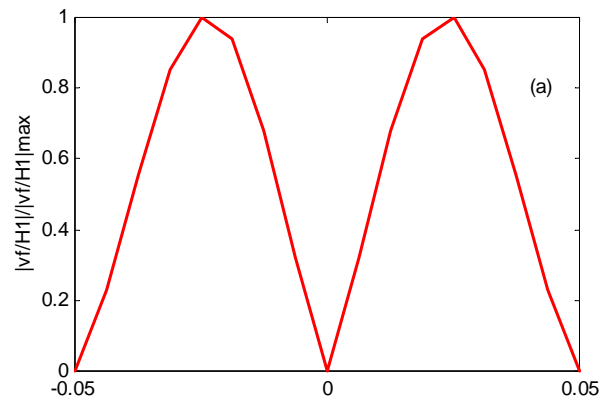


2nd Mode
at 500 Hz

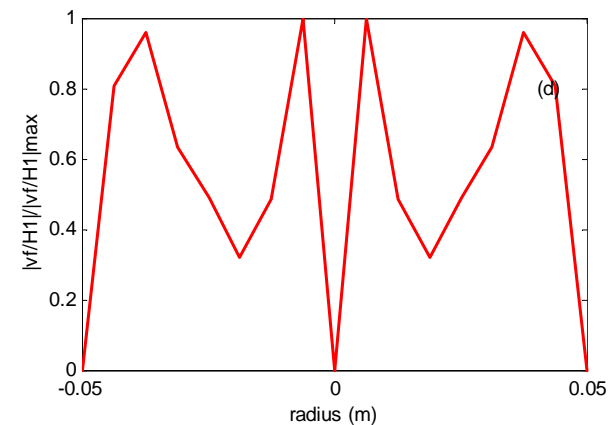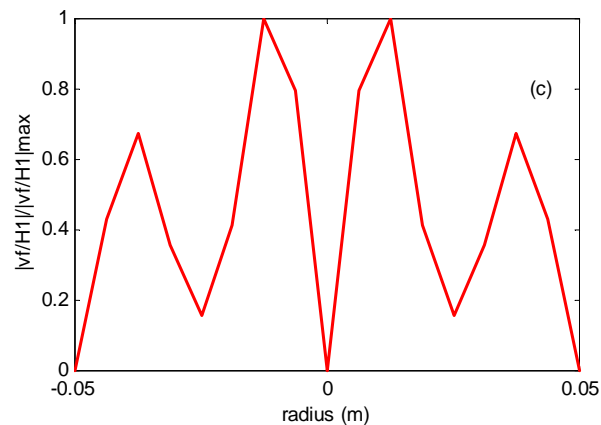


Normalized Frame Velocity of Sample in Large Tube, Hard Termination Case (1")

**Edge-
constrained**



FEM

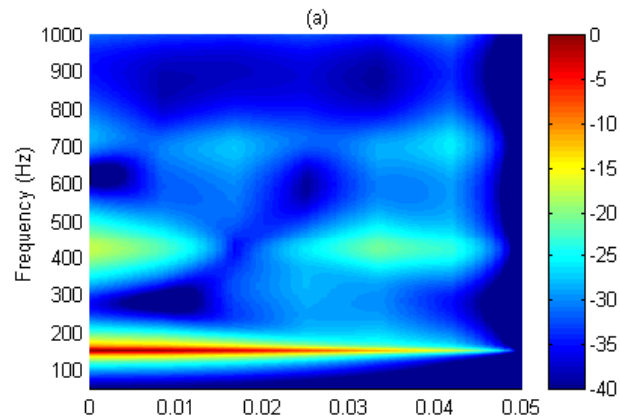


Experiment

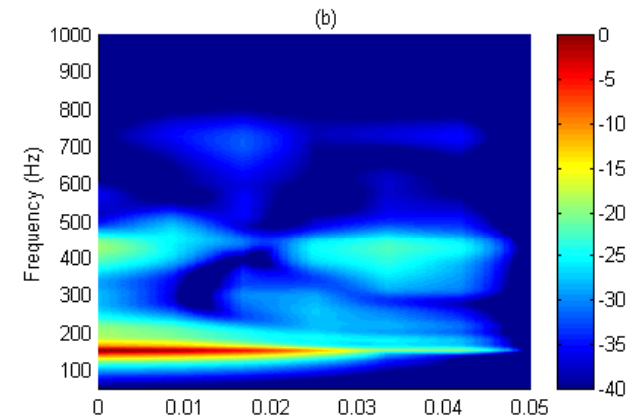

**Plane-
constrained**

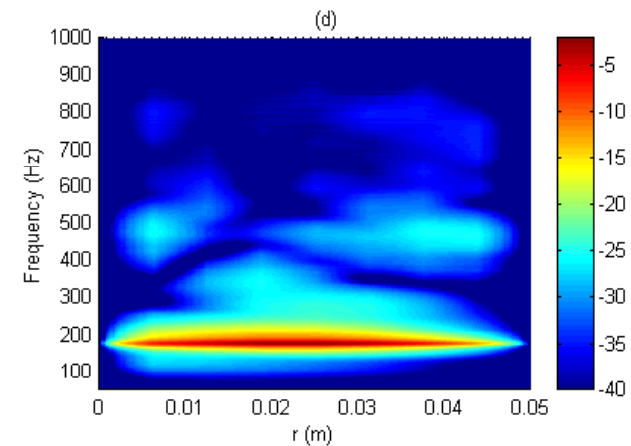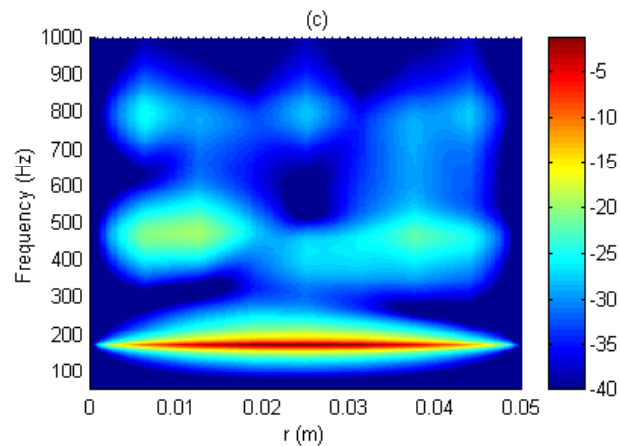

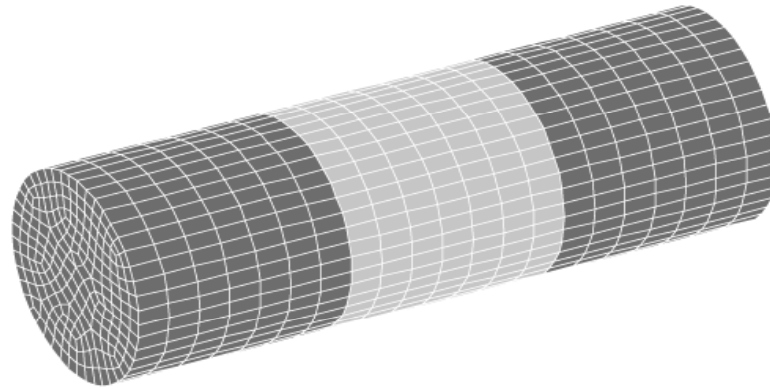

Conclusions

- Direct measurements show the vibrational velocity of the solid skeleton of fibrous sample placed in a standing wave tube.
- The **vibrational characteristics** are well predicted by using poroelastic FE model (COMET/SAFE).
- **Vibrational modes** of edge- and plane-constrained fibrous layers have been verified using a **laser vibrometer measurement**.