

Purdue University

**Purdue e-Pubs**

---

Department of Computer Science Technical  
Reports

Department of Computer Science

---

1999

## **Aerodynamic Damping Predictions for Turbomachine Blade Rows Using a Three- Dimensional Time Marching Simulations**

Dana A. Gottfried

Sanford Fleeter

**Report Number:**

99-026

---

Gottfried, Dana A. and Fleeter, Sanford, "Aerodynamic Damping Predictions for Turbomachine Blade Rows Using a Three- Dimensional Time Marching Simulations" (1999). *Department of Computer Science Technical Reports*. Paper 1456.

<https://docs.lib.purdue.edu/cstech/1456>

This document has been made available through Purdue e-Pubs, a service of the Purdue University Libraries.  
Please contact [epubs@purdue.edu](mailto:epubs@purdue.edu) for additional information.

**AERODYNAMIC DAMPING PREDICTIONS FOR  
TURBOMACHINE BLADE ROWS USING A  
THREE-DIMENSIONAL TIME MARCHING SIMULATION**

**Dana Gottfried  
Sanford Fleeter**

**CSD TR #99-026  
September 1999**

# **Aerodynamic Damping Predictions for Turbomachine Blade Rows Using a Three-Dimensional Time Marching Simulation**

Dana A. Gottfried and Sanford Fleeter

School of Mechanical Engineering  
Purdue University  
West Lafayette, Indiana 47907

## **Abstract**

Flow induced vibration of turbomachine blade rows is a coupled fluid-structure problem. Thus, rather than separate fluid and structural models, a coupled interacting fluid-structures analysis is needed. This research addresses this need by extending the finite element code ALE3D that solves the three-dimensional Euler equations to model the unsteady aerodynamics of turbomachine blade rows. The same finite element model is applied to both the blading and the fluid, resulting in consistency between the fluid and structure. This coupled interacting fluid-structure analysis enables the aerodynamic damping of multiple vibration modes to be predicted from a single time domain flow simulation. This novel approach to predict aerodynamic damping is demonstrated by considering a modern transonic compressor blade row. The blading is first impulsed in its first bending and first torsion modes in a vacuum. It is then immersed in the design-point flow field and impulsed in its first bending and first torsion modes again. Signal processing tools applied to the predicted blade response time history extract the difference in the decay rate of both modes.

## List of Symbols

$a_i$	acceleration
$A$	speed of sound
$A$	amplitude of response envelop
$b_i$	body force per unit volume
$E$	specific internal energy
$F^{hg}$	hourglass viscous force
$f$	impulse force coefficient
$h_i$	hourglass deformation rate
$M$	mass of element
$n_i$	normal pointing out of control surface
$Q^{hg}$	hourglass viscosity coefficient
$q$	shock smearing factor
$S$	surface of element
$t$	time
$u_i$	material velocity
$U_j$	mesh velocity
$\Psi$	volume of element
$x_i$	position vector
$\varepsilon_{ijk}$	alternating unit vector
$\Gamma$	hourglass deformation basis vector
$\rho$	density
$\sigma_{ij}$	stress tensor
$\tau$	pseudo-time/damping time constant
$\omega_n$	frequency
$\zeta_v$	non-dimensional damping constant in vacuum
$\zeta_a$	non-dimensional damping constant due to aerodynamics only
$\zeta_{tot}$	total non-dimensional damping constant
<i>Subscripts</i>	<i>Description</i>
$e$	elemental value
$i$	spatial coordinate, $i = 1, 2, 3$
$I$	nodal value, node number
$j$	spatial coordinate, $j = 1, 2, 3$
<i>superscripts</i>	<i>Description</i>
$n$	time step level
'	node-centered element quantity

## Introduction

The progress of turbomachine flow modeling over the past several decades has been great. In the steady flow realm, the initial numerical methods, for example panel methods, required little computer time and did an adequate job of modeling subsonic flows. Later, full Euler solvers enabled the modeling of transonic flows, but still did not address viscous and three-dimensional effects. Currently designers use three-dimensional steady Navier-Stokes solvers during the final stages of blade design.

Models for unsteady flow in turbomachinery have lagged behind the steady flow models because of their added complexity. However, their development is crucial since turbomachine blade rows operate in an inherently unsteady environment. The unsteady aerodynamic loading on the blading due to both flutter and forced response is the root cause for high cycle fatigue (HCF) blade failure. Thus, there is an urgent need to predict this unsteady aerodynamic loading and use the predictions to design more reliable and durable turbomachinery blade rows.

For blade-motion unsteadiness, either the unsteadiness can be specified a-priori as a boundary condition to the aerodynamics, or the aerodynamics and structure can be modeled simultaneously, as in a coupled fluid-structure interaction problem. In the infancy of this field, the former was chosen due to its relative simplicity. One moves closer to full fluid-structure interaction by modeling the blade as a beam. In this approach there are two separate systems of equations being solved – the structural system and the fluid system. They are coupled only in that the aerodynamic forces and blade state are passed between each other after each time step. This pseudo-coupling approach produces phase-lagging errors that can act as energy sources or sinks in the system.

Fluid-structure interaction that more precisely models the energy exchange between the fluid and structure is obtained by modeling both the fluid and structure with consistent numerical schemes. Bendiksen [1] accomplished this by solving the Euler equations using a finite volume method and the structural equations by a finite element method. The finite element method used solid elements with bi-linear shape functions. The final integral conservation law form of the fluid and structural equations are similar and thus both can be marched forward in time using the same five-stage Runge-Kutta technique. These results showed superior modeling of the energy exchange between the fluid and the structure.

This research begins to address the need for a three-dimensional coupled fluid-structure interaction model for turbomachine blade rows appropriate for all flow regimes with no phase-lagging errors. Namely, a finite element model able to handle both fluid and solids has been developed at Lawrence Livermore National Laboratories. This code, Arbitrary Lagrangian-Eulerian/3D (ALE3D), was developed from the DYNA3D model [2] with the added capability to handle general fluid-structure interaction problems, especially those involving plastic deformations. Phenomena can be modeled from the Lagrangian or Eulerian perspectives, or from any arbitrary reference frame. This approach is well suited for fluid-structure interaction problems where the structure is best modeled from the Lagrangian perspective, while the fluid is typically modeled from the Eulerian point of view. Since the same finite element method is used for the fluid and the structure, dynamic consistency as discussed by Bendiksen [1] is assured.

Unfortunately ALE3D cannot be directly applied to fluid-structure interaction problems in the turbomachinery environment. Modifications are necessary to include

appropriate turbomachine blade and flow mesh algorithms. In particular, periodic boundary conditions must be added to the sides of the domain so that only one blade passage needs to be analyzed. The hub and tip of the flow passage must be modified so that there is no fluid acceleration or velocity normal to these surfaces. The inflow boundary must be modified to allow for variable inflow velocity. Appropriate routines to output blade surface pressures at various sections, mass flow rate, and other mass averaged properties are also necessary additions to the code. The resulting Turbomachinery Aero-Mechanics code is called TAM-ALE3D, with its ability to model unsteady turbomachinery aerodynamics validated [3].

This paper is directed at developing and implementing a technique to predict the aerodynamic damping of multiple vibration modes from a single time domain flow simulation. Namely, a coupled fluid-structure simulation of a blade row enables aerodynamic damping of multiple modes to be predicted from a single simulation. This is accomplished by first impulsing the blading in a vacuum. The blading is then inserted into the design-point flow field and impulsed again. The aerodynamic damping in individual modes is then predicted by applying signal processing tools to the predicted blade response time histories.

The steel rotor blades of a modern-design transonic compressor rotor are modeled by the finite element analysis, with dynamic experiments performed with the code. First the blade is simulated as rotating at 20,000 rpm in a vacuum and the first two vibratory modes (first bending and first torsion) are located and quantified by impulsing the blade in these modes.

The rotor blade is then considered in a flow corresponding to the compressor design point is performed in three steps. First, the blade is fixed and the flow is marched to a steady state condition that matches the design mass flow rate. Next, the blade is allowed to move and dynamically relax to a steady state condition. The influence of centripetal acceleration and air pressure causes the blade's steady state geometry to be different from its geometry in a vacuum without rotation. Finally, the blade is impulsed and the time-history of the response is compared to its time-history when the blade is impulsed in a vacuum. This comparison gives the aerodynamic damping for both the first bending and first torsion modes.

### **Mathematical Model**

The equations describing a system specify conservation of mass, momentum, and energy. The position of a finite volume with volume  $\forall$  having a surface  $S$  is:

$$S(x_i, t) = 0 \quad (1)$$

where  $x_i$  represents the position vector with  $i$  representing the three coordinate directions.

Equation 1 specifies that a point  $P$  with position  $x_i$  at time  $t$  is on the surface of the volume. The motion of the volume can be different from that of the continuum and different from zero. Thus the volume does not constitute a material volume, but rather an arbitrarily moving reference frame. The motion of the volume is specified by the velocity  $U_i$  of the boundary  $S$ , i.e.  $U_i = \partial x_i / \partial t$ .

The conservation laws of mass, momentum, and energy for the volume  $\forall$  of the continuum enclosed by  $S$  are:



$$\frac{d}{dt} \int_{\mathcal{V}} \rho d\mathcal{V} + \int_{\mathcal{S}} \rho(u_i - U_i)n_i dS = 0 \quad (2)$$

$$\frac{d}{dt} \int_{\mathcal{V}} \rho u_i d\mathcal{V} + \int_{\mathcal{S}} \rho u_i (u_j - U_j)n_j dS = \int_{\mathcal{S}} (n_j \sigma_{ji} - qn_i) dS + \int_{\mathcal{V}} \rho b_i d\mathcal{V} \quad (3)$$

$$\frac{d}{dt} \int_{\mathcal{V}} \rho E d\mathcal{V} + \int_{\mathcal{S}} \rho E (u_i - U_i)n_i dS = \int_{\mathcal{V}} (\sigma_{ij} u_{i,j} - q u_{i,i}) d\mathcal{V} \quad (4)$$

where the scalar variables  $\rho$  and  $E$  are the density and specific internal energy;  $i$  and  $j$  range from one to three, with repeated indices summed per the rules of summation notation;  $u_{i,j}$  is a convenient representation of the velocity gradient tensor, with the “ $j$ ” subscript representing the derivative with respect to the  $j$  direction;  $n_i$  is the normal surface vector pointing out of the volume;  $\sigma_{ij}$  is the stress tensor;  $b_i$  is the body force per unit mass; and the  $q$  term is a mathematical device which smears shocks over distances comparable to the mesh interval in numerical calculations [3,4].

To solve these equations, an operator split is performed to separate the problem into simpler parts: a Lagrangian part and an advection part. Specifically, the velocity of the mesh is split into two parts:  $U_i = U_i^{(1)} + U_i^{(2)}$ . In the first part of the operator split,  $U_i^{(1)} = u_i$  which allows the mesh to move with the material according to the equations of motion. In the second part, the motion of the system is frozen but moves the mesh through the domain by setting  $U_i^{(2)} = U_i - u_i$ . The first step is called the Lagrangian step, while the second step is referred to as the advection step.

The equations of motion for the Lagrangian step are found by substituting  $U_i = U_i^{(1)} = u_i$  into the conservation equations.

$$\frac{D}{Dt} \int_{\mathcal{V}} \rho d\mathcal{V} = 0 \quad (5)$$

$$\frac{D}{Dt} \int_{\mathcal{V}} \rho u_i d\mathcal{V} = \int_{\mathcal{S}} (n_j \sigma_{ji} - q n_i) dS + \int_{\mathcal{V}} \rho b_i d\mathcal{V} \quad (6)$$

$$\frac{D}{Dt} \int_{\mathcal{V}} \rho E d\mathcal{V} = \int_{\mathcal{V}} (\sigma_{ij} u_{i,j} - q u_{i,i}) d\mathcal{V} \quad (7)$$

where  $D/Dt$  shows that the finite volume is moving with the material.

In the second step of the operator split, real time is fixed, the system is frozen, and the mesh is moved through the field with the velocity  $U_i^{(2)} = U_i - u_i$ . This can be thought of as merely a geometric update of the mesh, so the right-hand side source terms in Equations 2-4 are set to zero and the flow velocity  $u_i$  in the flux term is zero. However, the  $u_i$  term appearing in  $U_i^{(2)}$  is still necessary to account for the motion of the mesh during its relaxation. Since real time is not progressing during the advection step (the material is frozen), a pseudo-time  $\tau$  is introduced that advances during this second part of the operator split. The advection equations in pseudo-time are then:

$$\frac{d}{d\tau} \int_{\mathcal{V}} \rho d\mathcal{V} + \int_{\mathcal{S}} \rho (u_i - U_i) n_i dS = 0 \quad (8)$$

$$\frac{d}{d\tau} \int_{\mathcal{V}} \rho u_i d\mathcal{V} + \int_{\mathcal{S}} \rho u_i (u_j - U_j) n_j dS = 0 \quad (9)$$

$$\frac{d}{d\tau} \int_{\mathcal{V}} \rho E d\mathcal{V} + \int_{\mathcal{S}} \rho E (u_i - U_i) n_i dS = 0 \quad (10)$$

### **Space and Time Discretizations**

The computational domain is discretized using an unstructured assembly of hexahedron (six-sided) elements. The fundamental unknowns are assigned to staggered locations in the mesh. The stress tensor, specific internal energy, mass, and shock smearing factor are assigned to element centers, with these constant over the element. The flow and mesh velocities ( $u_i$  and  $U_i$ ) are assigned to element nodes. In the time discretization, the unknowns are also staggered. The stress tensor, internal energy, and density are evaluated at time levels  $n, n+1, n+2, \dots$ , while the flow and mesh velocities are evaluated at time levels  $n-1/2, n+1/2, n+3/2, \dots$ .

The equations are discretized by choosing integration volumes as those of the finite elements. Furthermore, because the velocities are defined at element nodes, integrating the momentum equations, Equations 6 and 9, requires the use of a “node-centered element”. This node-centered element is defined by a hexahedron whose vertices are at the center of the surrounding elements. The term “node-centered element” is used to differentiate from the regular elements, with the symbols  $\mathcal{V}'$ ,  $S'$  and  $n'_i$  denoting the volume, surface, and surface normal of this node-centered element.

### **Marching Forward in Time**

For each time step there is a Lagrange calculation, a relaxation of the mesh, and an advection calculation, in this order. All three calculations must be performed for the fluid elements, with only the Lagrange calculation necessary for the structural elements.

### Lagrange Calculation

In the first part of the operator split,  $U_i^{(1)}$  is set equal to  $u_i$  and Equations 5, 6, and 7 are marched forward in real time.

Equation 5 shows that mass is constant in the volumes  $\mathcal{V}$  and  $\mathcal{V}'$ . The mass  $M'$  in the node-centered element is one-eighth the sum of the masses of the surrounding elements. Using the node-centered element to integrate Equation 6 then gives:

$$(M'a_i^n)_I = \sum_e \left( n'_j (\sigma_{ji}^n)_e - (q^{n-1/2})_e n'_i \right) \Delta S' + (M'b_i^n)_I \quad (11)$$

where the superscript denotes the time level; the subscript I denotes node I, the subscript e denotes element e; the summation is over all elements surrounding node I, eight elements for an interior node or four, two, or one element for a boundary node; and  $\Delta S'$  is the fraction of surface area of the node-centered element contained in element e.

For a reference frame rotating at a constant angular velocity  $\omega_i$ , the body force per unit mass includes both Coriolis and centripetal accelerations.

$$b_i^n = -2\varepsilon_{ijk}\omega_j u_k^n - \varepsilon_{ijk}\omega_j (\varepsilon_{klm}\omega_l x_m^n) \quad (12)$$

Here  $\varepsilon_{ijk}$  is the alternating unit tensor that has the effect of taking the cross product of two vectors, and  $x_m^n$  is the position vector at time level n. For example, if the angular velocity is along the 3-axis, the body force per unit mass is

$$b_1^n = (x_1^n \omega + 2u_2^n)\omega \quad b_2^n = (x_2^n \omega - 2u_1^n)\omega \quad b_3^n = 0 \quad (13)$$

Application of Equation 11 gives the nodal accelerations at time level n. However, the equation must be modified to incorporate the hourglass viscous damping.

### *Hourglass Viscosity*

For a hexahedron element, there are eight degrees-of-freedom in each coordinate direction, one for each node. A set of basis vectors for an eight degree-of-freedom system is given in Table 1. These can be interpreted as the eight deformation modes of a hexahedron element. Representations of the eight deformation modes corresponding to these basis vectors are given in Figure 1.  $\Gamma_{Ik}$  denotes the eight-component vector describing each hourglass mode, where  $I$  corresponds to the eight nodes of the element, and  $k$  corresponds to the four hourglass modes. The rigid body mode and the hourglass modes are unique in that they result in no net change in the volume of the element.

The strain of the elements is approximated as constant over the element. Thus, deformations resulting in no net volume change produce no change in the strain of the element. Since the strain state is not affected by these deformation modes, the stress state is also not affected, and the four hourglass modes have no natural mechanism whereby they are resisted. Small numerical errors could create deformations in these hourglass modes which, left un-resisted, would destroy the solution. Although the rigid body mode also has no net volume change, it is resisted by the global boundary conditions.

Such numerically generated hourglass modes are often oscillatory with smaller periods than that of the physical process. Thus a good way of resisting them is to apply an artificial viscous force in these deformation modes. First, using the velocity, the extent to which the element is deforming in the hourglass modes is calculated.

$$h_{ik} = u_{il} \Gamma_{lk} \quad (14)$$

where  $h_{ik}$  represents the rate at which an element is deforming in hourglass mode  $k$  in the three  $i$  coordinate directions.

An hourglass resisting force for each element is then taken to be proportional to  $h_{ik}$ , and distributed among the nodes so that it is applied in the shape of the hourglass mode. This hourglass resisting force is:

$$F_{ii}^{hg} = -\rho \Psi^{2/3} \left( 0.25 Q^{hg} A + 25 (Q^{hg})^2 |h_{ik}| \right) h_{ik} \Gamma_{ik} \quad (15)$$

where there is no summation over  $i$  although this subscript is repeated on the right-hand side,  $Q^{hg}$  is the user-specified constant usually set between 0.05 and 0.15,  $\Psi$  is the element volume, and  $A$  is the material speed of sound.

The viscous hourglass force is added to the nodal forces calculated in Equation 11. Thus the acceleration of a node is:

$$(M' a_i^n)_i = \sum_e \left( n_i' (\sigma_{ij}^n)_e - (q^{n-1/2})_e n_i' \right) \Delta S' + (M' b_i^n)_i + F_{ii}^{hg} \quad (16)$$

#### *Update all Nodal Positions and Velocities*

After obtaining the nodal accelerations, a centered-difference formula is used to find the velocity at time level  $n+1/2$ . The centered-difference formula is again applied to the velocity to find the new position of the node at time level  $n+1$ , i.e.

$$u_i^{n+1/2} = u_i^{n-1/2} + \Delta t^{n+1/2} a_i^n \quad (17)$$

$$x_i^{n+1} = x_i^n + \Delta t^n u_i^{n+1/2} \quad (18)$$

where  $\Delta t^n$  is the time step from time level  $n$  to level  $n+1$ , the time step from  $n-1/2$  to  $n+1/2$  is calculated from this as  $\Delta t^{n+1/2} = 0.5(\Delta t^n + \Delta t^{n-1})$ , and provision for  $\Delta t^n \neq \Delta t^{n+1/2}$  is necessary since the time step is allowed to vary throughout the simulation.

The maximum time step for the simulation is calculated at each step as that which satisfies the Lagrangian time step restriction and the advection time step restriction. The Lagrangian restriction says the time step must be small enough that during the step a disturbance propagating at the speed of sound moves no further than the minimum of the characteristic lengths of the elements. The characteristic length of an element is taken as the volume of the element divided by the area of the largest of its six faces. In this study the maximum time step is always limited by the Lagrangian time step because the speed of sound in the metal blade is more than an order of magnitude larger than that in air. The fluid simulation by itself does not need to run with such a small time step, but it is necessary to do so to capture the full fluid-structure interaction effect.

### *Updating Elemental Values*

The final part of the Lagrange calculation is to update the elemental values. Since it is a Lagrange calculation, the mass of the element does not change. However, the stress tensor, internal energy and shock smearing factor are changed. The stress tensor is updated in two steps. First, the rotation of the element is taken into account by rotating the stress tensor. Second, the elemental strain rate changes the stress tensor through constitutive relations. The constitutive relations used for the blade are those for a linear elastic isotropic solid. The elemental energy is updated by application of Equation 7, and the shock smearing factor is updated according to its governing equation [3].

### **Mesh Relaxation and Advection**

The Lagrange step is now complete and all fluid and structural quantities are known at the  $n+1/2$  and  $n+1$  time levels. However, the fluid mesh cannot continue moving in a Lagrangian fashion, otherwise the solution will be destroyed as the mesh exits the solution domain with the fluid. Therefore, before proceeding to the next time level it is necessary to relax the fluid mesh to a new position and calculate new fluid mesh quantities via an advection calculation [3].

### **Boundary Conditions**

#### **Fluid-Structure Boundary**

The interfaces between materials are termed “slide surfaces,” with the structural side called the “master” slide surface, and the fluid side the “slave” slide surface. A great convenience of the TAM-ALE3D code is that the master and slave nodes do not need to be adjacent. Interpolation is used to find the mass and acceleration of the region adjacent to a given slide surface node for proper application of the boundary condition.

For illustration, consider adjacent fluid and structural nodes. Before application of the fluid-structure boundary condition, these nodes are accelerating according to Equation 16 without regard to each other’s presence. The fluid-structure boundary condition then modifies the acceleration of these two nodes by requiring them to move together as one body normal to the interface. If the mass and acceleration of the slave and master node after application of Equation 16 are  $M^{\text{slave}}$ ,  $a_i^{\text{slave}}$  and  $M^{\text{master}}$ ,  $a_i^{\text{master}}$ , then the new acceleration normal to the slide surface for both nodes is



$$\mathbf{a}_{\text{normal}}^{\text{new}} = \left( \frac{M^{\text{slave}} \mathbf{a}_i^{\text{slave}} + M^{\text{master}} \mathbf{a}_i^{\text{slave}}}{M^{\text{slave}} + M^{\text{master}}} \right) \mathbf{n}_i \quad (19)$$

where  $\mathbf{n}_i$  is the unit vector normal to the slide surface.

This new acceleration is the acceleration of the combined fluid/structure boundary node, having mass  $M^{\text{slave}} + M^{\text{master}}$ . The acceleration from Equation 16 is adjusted to reflect this change in normal acceleration.

The velocity and position of the fluid nodes are calculated with Equations 17 and 18 using this new acceleration. They are then adjusted to account for the possibility that the blade surface is curved. At the new nodal positions, the nodes are required to be on the blade surface, and the velocities are required to be tangent to the blade surface.

### **Periodic Boundaries**

Only one blade passage is analyzed, with the flow variables transferred directly between the blade-to-blade boundaries. This corresponds to a  $0^\circ$  interblade phase angle.

### **Rotor Hub and Tip Boundaries**

The blade nodes at the hub are fixed with zero acceleration, while the tip blade nodes have no constraint on their motion. Most fluid nodes at the hub/tip boundaries are required to have zero velocity and displacement normal to the hub/tip surface. However, this constraint is not enforced for those fluid nodes on the tip boundary and on the blade surface. This special treatment is necessary because there is no tip clearance model. The tip of the blade lies exactly on the tip annulus boundary when the blade is stationary. However, when the blade is vibrating, the tip of the blade is free to move off the tip annulus wall. The fluid nodes on the blade tip surface remain on the blade surface,

resulting in a non-zero displacement normal to the tip annulus boundary. Their velocities are required to be tangent to the tip surface and to the blade.

### **Inflow and Outflow Boundaries**

At the inflow boundary, the flow velocity, density, and energy are specified, with the static pressure specified at the outflow boundary. This over-specifies the problem. However, consistency is obtained by varying the static pressure at the exit until the average density and internal energy of the elements along the inflow boundary match the specified density and energy. Note that both boundary conditions are reflective [3,6].

### **Results**

The aerodynamic damping of the first two vibration modes of a modern transonic compressor rotor with 18 blades and a design speed of 20,000 rpm are analyzed with this full fluid-structure interaction simulation. The steel blades have a Young's modulus of 2.06 Mbars, a Poisson's ratio of 0.28, and a density of 7830 kg/m<sup>3</sup>. The geometry and properties of the steel blades, as well as the properties of the surrounding fluid flow for one blade passage, are modeled by the finite element analysis. Periodic boundaries are employed so that only one blade passage needs to be modeled.

The fluid-structure interaction simulation requires the simultaneous modeling of both the fluid and the structure using the same finite element method. Since the speed of sound in steel is over an order of magnitude larger than that in air, the maximum time step of the fluid-structure simulation must be over an order of magnitude less than that of a typical fluid-only simulation. This places a heavy burden on computational resources,

and thus every effort is made to reduce the size of the three-dimensional finite element mesh without severely compromising the integrity of the solution.

Figure 2 shows the finite element mesh used for the blade. There are 532 elements modeling the steel blade. Figure 3 shows a two-dimensional slice of the tip section of the blade, including the fluid mesh. The mesh is coarse around the leading and trailing edges so that the solution can be run in reasonable time. The full three-dimensional fluid mesh has 7986 hexahedron elements. With this coarse mesh, the three-dimensional steady flow Euler solution is obtained in eight hours of computer time on an IBM RS/6000. For the simulation of fluid-structure interaction, which includes the modeling of the steel blade, approximately one day of computer time is required to model one oscillation in the first bending mode.

### **Impulses**

The behaviors of the first bending and first torsion modes are determined by impulsing the blade such that it oscillates predominately in these modes. The natural frequencies and decay rates are then extracted from the time-history of the blade response.

The impulse is a force distributed over the nodes embedded halfway through the blade thickness. This force  $f$  is applied for 100 microseconds and has a shape that approximates either the first bending mode or the first torsion mode. For both the bending and torsion impulse,  $f = 5$  Newtons, resulting in noticeable blade tip displacement, but does not plastically deform the blade.

The first bending mode impulse, applied normal to the tip chord, has the shape

$$f\left(1 - \cos\left(\frac{y\pi}{2}\right)\right) \quad (20)$$

where  $y$  is the spanwise coordinate, zero at the blade hub and one at the blade tip.

The first torsion mode impulse is applied normal to the tip chord and has the shape

$$f\left(1 - \cos\left(\frac{y\pi}{2}\right)\right)\xi \quad (21)$$

where  $\xi$  is the chordwise coordinate, -1 at the leading edge and +1 at the trailing edge.

### **Filtering to Extract Individual Modal Responses**

The displacement time-histories of a point on the blade tip leading edge are shown in Figures 4 and 5 for the bending impulse and the torsion impulse at 0 rpm and 20,000 rpm in a vacuum. The effect of rotation is taken into account by including centripetal and Coriolis acceleration terms in the body force term  $b_i$  for rotation about the 3-axis. The non-symmetric nature of the response for the torsion impulse is due to the first bending mode that is still present in the response. The response due to only the torsion mode is obtained by filtering the signal, accomplished by transforming the tip leading edge displacement to the frequency domain via a Fourier transform.

Figure 6 shows the frequency domain response of the blade rotating in a vacuum at 20,000 rpm and receiving a torsion impulse. The bending mode is apparent at 1310 Hz. The cut-off for filtering is chosen as that frequency having the lowest power spectral density between the two frequency peaks. The individual modal responses are then transformed back to the time domain via an inverse Fourier transform.

### **Natural Frequencies**

Simulations are performed for the blade in a vacuum rotating at three different rotational speeds: 0, 10,000 and 20,000 rpm. For non-zero rpm, the blade is first dynamically relaxed to a steady state before it is impulsed. The relaxation is necessary to remove the transients caused by impulsively starting the blade rotation.

The resulting time-histories of the blade tip leading edge displacement normal to the chord are filtered to isolate the individual modal responses. The peaks and troughs of the filtered signals are then extracted, with the inverse of the average time between them giving the natural frequency of the mode.

For the bending mode, peaks and troughs are sampled from 2-8 milliseconds. For the torsion mode, they are sampled from 1-4 milliseconds. This sampling assures that at least 15 data points are used to compute the average natural frequency. The dependence of natural frequency on rotation rate is summarized in Table 2, with the frequency results standard deviation in parentheses. To assure that mesh resolution is not an issue, TAM-ALE3D predictions were obtained with double the number of elements in the chordwise and spanwise directions. The resulting natural frequencies had negligible change.

### **Steady Flow Solution**

The aerodynamic input parameters correspond to the rotor design operating point, where the rotor is speed is 20,000 rpm and the mass flow rate is 11.5 lbm/s. The distribution of relative flow velocity at the inflow boundary is also specified by design. The inflow stagnation properties in the non-rotating frame are set to standard temperature and pressure. The exit static pressure is set to give the proper mass flow rate.

With an exit static pressure of  $1.227 \times 10^5$  Pa, the resulting mass flow rate at the inflow and outflow boundaries are 11.54 lbm/s and 11.52 lbm/s. The mass-averaged total pressure in the absolute frame at the inflow boundary is  $1.020 \times 10^5$  Pa, which is less than 1% different from the standard pressure of  $1.013 \times 10^5$  Pa. This indicates that the exit static pressure value is consistent with the specified inflow properties. The resulting mass-averaged total pressure at the outflow boundary is  $1.354 \times 10^5$  Pa, yielding a total pressure ratio across the rotor of 1.33, which is the design value.

As the steady flow is established, the blade is held fixed in its initial position. The blade is then released and allowed to relax to a steady state position under the influence of the external air pressure and the 20,000 rpm centripetal forces. The blade is numerically stopped at several instants to help the blade relax more quickly. The displacement of the tip of the blade normal to the chord in its steady state position is shown in Table 2. Also shown are the analogous results for the blade in a vacuum, which includes centripetal acceleration effects only. Positive displacements are toward the suction side of the blade, so the results show that both the air pressure and the centripetal acceleration cause the blade to bend more towards its suction side. The displacement of the blade from its initial position is so small that there is no noticeable change in the steady aerodynamics as the blade relaxes to its new steady state position.

### **Aerodynamic Damping**

There is both aerodynamic and non-aerodynamic damping present as the blade vibrates in the flow field. The non-aerodynamic damping is due to the hourglass viscosity necessary to resist the unwanted hourglass modes. This damping is present even if the blade is vibrating in a vacuum. In this sense, the hourglass damping is similar

to mechanical damping present in real blades due to the blade-disc interface and the internal energy dissipation sources. However, the hourglass damping is not intended to model real damping sources.

The aerodynamic and non-aerodynamic damping of each mode are evaluated in terms of the non-dimensional decay constants  $\zeta_a$  and  $\zeta_v$ . If  $f(t)$  is the undamped response of the blade, then the damped response in a vacuum is  $e^{-t\omega_n\zeta_v}f(t)$ , where  $\omega_n$  is the mode natural frequency. The damped response in the flow includes damping from both the hourglass viscosity and the aerodynamics. Thus, the response in flow is  $e^{-t\omega_n(\zeta_a+\zeta_v)}f(t)$ . The total non-dimensional damping parameter measured from the response of the blade in flow is  $\zeta_{tot} = \zeta_a + \zeta_v$ . As both  $\zeta_{tot}$  and  $\zeta_v$  are measured quantities, the damping due to just the aerodynamics is:

$$\zeta_a = \zeta_{tot} - \zeta_v \quad (22)$$

The response envelope for the blade in a vacuum is  $Ae^{-t\omega_n\zeta_v}$ , and that for the blade in flow is  $Ae^{-t\omega_n\zeta_{tot}}$ . Since the duration of the impulse is very short (100 microseconds) the initial response amplitude is fixed regardless of whether the blade is impulsed in a vacuum or a flow. Therefore, the amplitude  $A$  used in the curve fit is first approximated by performing the curve fit with both  $A$  and  $\zeta$  as parameters. The average  $A$  from the in-vacuum and in-flow cases is then used as a fixed value in the second pass of the curve fit, which has only  $\zeta$  as a parameter. This second-pass value of  $\zeta$  is what is presented.

The amount of damping is also expressed in terms of a time decay constant  $\tau$ , where the damping envelope follows  $Ae^{-t/\tau}$ . The  $\tau$  value is calculated in the curve fit and is shown in the results. This value is related to  $\zeta$  via  $\zeta = 1/(\omega_n\tau)$ .

### *Bending Only Impulse*

The aerodynamic damping is calculated for the first bending mode. After the blade reaches its steady state position at 20,000 rpm, it is hit with the bending mode impulse, Equation 20. The resulting displacement of the tip leading edge normal to the tip chord is shown in Figure 7 for both the in-vacuum and the in-flow cases. The computer time required for the in-vacuum case is approximately four hours per 0.01 seconds of simulation, while for the in-flow case it is 400 hours per 0.01 seconds of simulation.

The peaks and troughs of the curves within the interval 0.001 to 0.01 seconds are extracted and a curve fit is passed through them, Figure 7. Note that this interval gives over 20 data points for the curve fit. The amplitude  $A$  for the  $Ae^{-\zeta_n \zeta}$  curve fit is fixed at 0.0355 cm. The least-squares fit gives an in-vacuum damping constant of  $\zeta_v = 0.00207$ , and an in-flow damping constant  $\zeta_{tot} = 0.00337$ . Using Equation 22, the aerodynamic damping for the first bending mode is  $\zeta_a = 0.00130$ .

### *Torsion Only Impulse*

At time  $t = 0$ , the blade is hit with the torsion mode impulse, Equation 21. The resulting displacement of the tip leading edge normal to the tip chord is shown in Figure 8 for both the in-vacuum and the in-flow cases. This signal is filtered as described earlier to extract only the torsion mode response, with this filtered signal shown in Figure 9. The peaks and troughs of the curve within the interval 0.0005 to 0.006 seconds are extracted and a curve fit is passed through them. Note that this interval gives over 20 data points for the curve fit. The amplitude  $A$  for the  $Ae^{-\zeta_n \zeta}$  curve fit is fixed at 0.0161



cm. The least-squares fit gives an in-vacuum damping constant of  $\zeta_v = 0.0210$ , and an in-flow damping constant of  $\zeta_{tot} = 0.0253$ . Using Equation 22, the aerodynamic damping for the first torsion mode is  $\zeta_a = 0.0043$ . Thus the aerodynamic damping for the first torsion mode is larger than the aerodynamic damping for the first bending mode.

### *Combined Bending and Torsion Impulse*

The maximum blade displacement due to the bending and torsion impulses is small enough (tip displacements less than 1% chord) that non-linear aerodynamic effects are negligible. Thus, the torsion and bending impulses can be applied simultaneously to determine the aerodynamic damping constants for both modes with just one simulation.

At time  $t = 0$ , the blade is hit simultaneously with the bending and torsion impulses for 100 microseconds. The resulting blade tip displacement normal to the chord is shown in Figure 10 for both the in-vacuum and in-flow cases. These curves are filtered and the bending and torsion modal responses separated, Figure 11. The damping results from the curve fits are summarized in Table 3. The final aerodynamic damping constants for each mode are shown in the last row, with the values found from the separate torsion and bending impulses in parentheses. The combined torsion/bending impulse produced bending and torsion damping constants approximately 3% lower and 5% larger than the bending-only and torsion-only impulse results. These differences could be due to the inherent inaccuracies associated with curve fitting discrete data points. Also, aerodynamic nonlinearities could result in some coupling and transfer of energy between the bending and torsion responses.

### *Reduced Hourglass Damping Case*

As a self-consistency check on the results, the combined bending and torsion impulse case is repeated, except now the hourglass damping coefficient ( $Q^{hg}$  in Equation 15) for the blade material is halved, being reduced from 0.10 to 0.05. This results in less overall damping for the blade, but should not change the aerodynamic damping

The blade is again hit simultaneously with the bending and torsion impulse for 100 microseconds. The resulting blade tip displacement normal to the chord is shown in Figure 12 for both the in-vacuum and in-flow cases. These curves are filtered and the bending and torsion modal responses separated.

Figure 13 shows that the filtered torsion mode response is clearly less damped than the previous case due to the decreased hourglass damping. The damping results from curve fits are summarized in Table 3. The final aerodynamic damping constants for each mode are shown in the last row, with the corresponding results from the previous case with more hourglass damping shown in parentheses. This low hourglass damping produced an aerodynamic damping constant for the bending and torsion modes approximately 1% and 7% smaller than the high hourglass damping results. Again, part of the difference is due to using a curve fit to describe a set of discrete data points. However, overall the results indicate that using the impulse technique is valid for extracting aerodynamic damping.

### **Summary & Conclusions**

A novel approach has been developed to predict the aerodynamic damping of multiple vibration modes from a single time domain flow simulation. This is

accomplished by implementing a coupled interacting fluid-structure analysis that enables the same finite element method to model both the fluid and the structure. Thus, the exchange of energy and momentum across the fluid-structure boundary is not prone to phase-lagging errors that tend to act as energy sources or sinks at the fluid-structure boundary. This approach is then demonstrated by predicting the aerodynamic damping of a modern transonic compressor rotor.

The blading is first impulsed in its first bending and first torsion modes in a vacuum. It is then immersed in the design-point flow field and impulsed in its first bending and first torsion modes again. Signal processing tools applied to the predicted blade response time history extract the difference in the decay rate of both modes.

The results show that for this rotor, the aerodynamic damping for the first bending mode is less than the aerodynamic damping for the first torsion mode. The feasibility of extracting the aerodynamic damping for several modes during one simulation was demonstrated by first running the simulations separately and then simultaneously. The resulting aerodynamic damping constants for the modes are very similar. A self-consistency check was performed by simulating the same case with different hourglass viscosity coefficients. The aerodynamic damping was not changed significantly by this change in hourglass viscosity, as expected.

The approach developed herein of modeling fluid-structure interactions in turbomachinery is consistent since the blade and fluid are modeled with the same numerical scheme. As computers become larger and faster, it is likely that this consistent approach will become the method of choice.

### ACKNOWLEDGMENTS

This research was sponsored, in part, by the Department of Energy, ASCI Program, Contract LG-6982. This support is most gratefully acknowledged.

### References

1. Bendiksen, O. O., "A New Approach to Computational Aeroelasticity," *AIAA-91-0939*, April 1991.
2. Hallquist, J. O., "Theoretical Manual for DYNA3D," Lawrence Livermore Laboratory, *UCID-19401*, March 1983.
3. Gottfried, Dana A., Fleeter, Sanford, "Prediction of Unsteady Cascade Aerodynamics by an Arbitrary Lagrangian-Eulerian Finite Element Method," *AIAA-98-3746*, July 1998.
4. Noh, W. F., "Numerical Methods in Hydrodynamic Calculations," Lawrence Livermore Laboratory, *UCRL-52112*, June 1976, pp. 52, 58.
5. Flanagan, D. P. and Belytschko, T., "A Uniform Strain Hexahedron and Quadrilateral with Orthogonal Hourglass Control," *International Journal for Numerical Methods in Engineering*, Vol. 17, pp. 679-706, 1981.
6. Huff, D. L., "Numerical Analysis of Flow Through Oscillating Cascade Sections," *NASA Technical Memorandum 101417*, 1989.
7. Panton, Ronald L., Incompressible Flow, 2<sup>nd</sup> Edition, John Wiley & Sons, Inc. 1996.

Deformation Mode	Node Number $I$							
	1	2	3	4	5	6	7	8
Rigid Body, $\Sigma_1$	1	1	1	1	1	1	1	1
Expansion/Contraction, $\Lambda_{11}$	-1	1	1	-1	-1	1	1	-1
Shear 1, $\Lambda_{12}$	-1	-1	1	1	-1	-1	1	1
Shear 2, $\Lambda_{13}$	1	1	1	1	-1	-1	-1	-1
Hourglass 1, $\Gamma_{11}$	-1	-1	1	1	1	1	-1	-1
Hourglass 2, $\Gamma_{12}$	-1	1	1	-1	1	-1	-1	1
Hourglass 3, $\Gamma_{13}$	1	-1	1	-1	1	-1	1	-1
Hourglass 4, $\Gamma_{14}$	1	-1	1	-1	-1	1	-1	1

Table 1. Deformation modes of a hexahedron element

### Blade natural frequencies

RPM	First Bending		First Torsion	
	Freq. (Hz)	Std. Dev. (Hz)	Freq. (Hz)	Std. Dev. (Hz)
0	1110	10	2590	30
10,000	1160	31	2610	35
20,000	1310	13	2670	21

### Blade tip displacements

Position	Displacement normal to chord (cm)	
	In a Vacuum @ 20,000 rpm	In Flow @ 20,000 rpm
Leading Edge	0.0059	0.0104
Mid-chord	0.0036	0.0080
Trailing Edge	0.0008	0.0040

Table 2. Predicted blade natural frequencies and steady state tip displacements

### Nominal Hourglass Damping

Parameter	Bending Mode	Torsion Mode
A (in $Ae^{-\omega_n \zeta}$ curve fit)	0.0383 cm	0.0129 cm
Sampling Interval	0.001-0.01 s	0.0005-0.006 s
$\zeta_v$	0.00195	0.0214
$\zeta_{tot}$	0.00321	0.0259
$\zeta_a$	0.00126 (0.00130)	0.0045 (0.0043)

### Low Hourglass Damping

Parameter	Bending Mode	Torsion Mode
A (in $Ae^{-\omega_n \zeta}$ curve fit)	0.0384 cm	0.0132 cm
Sampling Interval	0.001-0.01 s	0.0005-0.006 s
$\tau_v$	0.00101	0.0117
$\tau_{tot}$	0.00226	0.0159
$\tau_a$	0.00125 (0.00126)	0.0042 (0.0045)

Table 3. Damping constants for bending/torsion impulse with hourglass damping effect

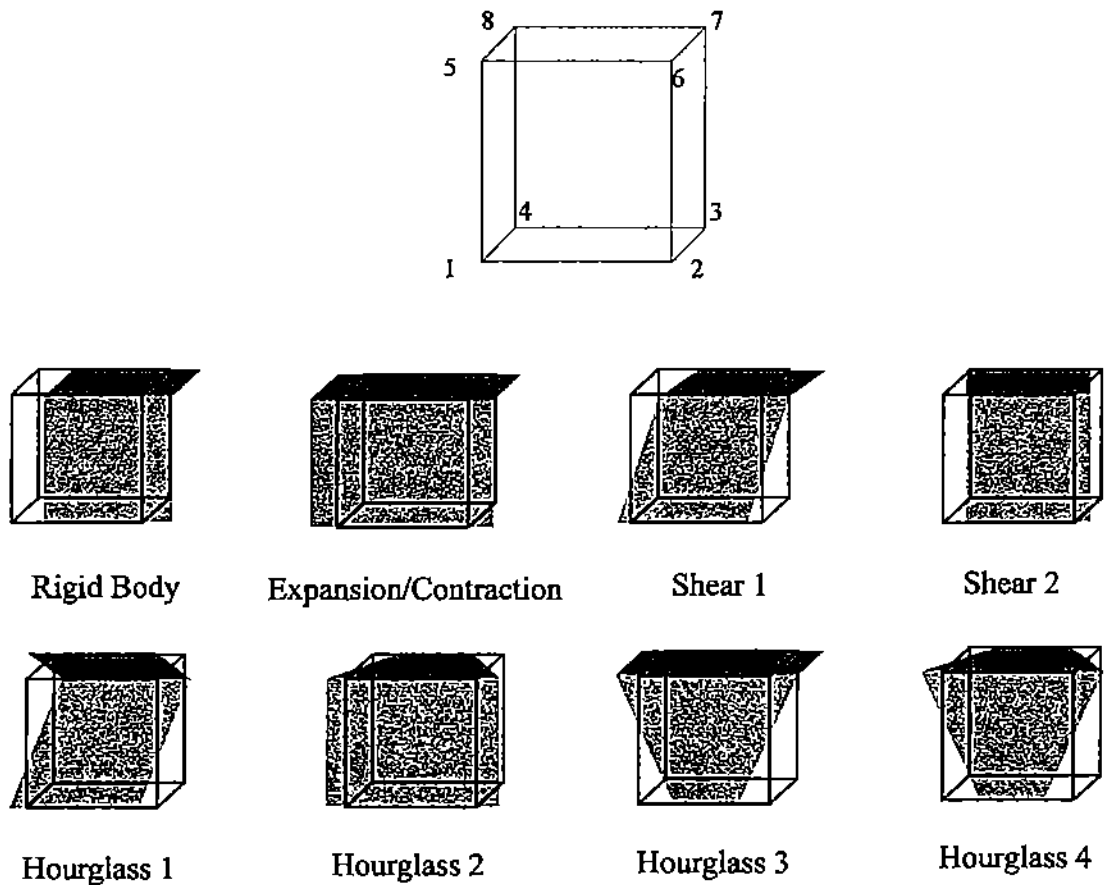


Figure 1. Element nodal numbering and hexahedron element deformation modes



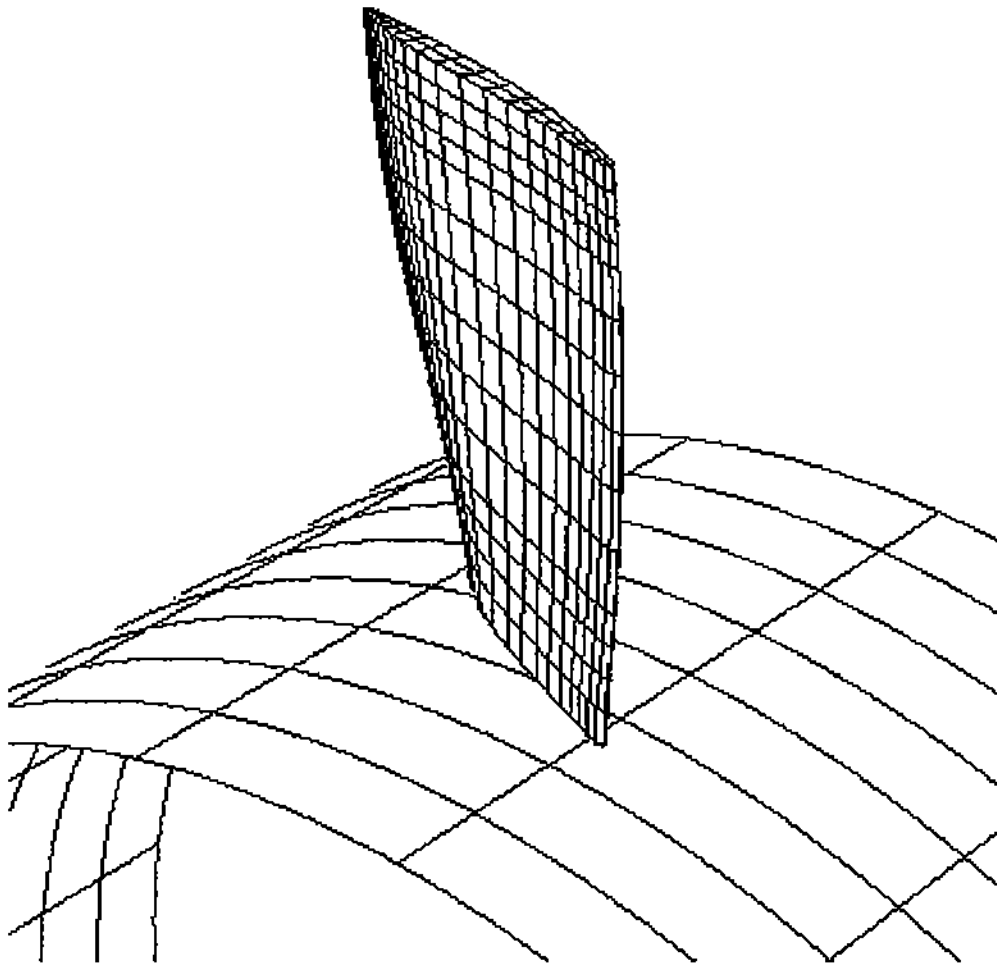


Figure 2. Rotor blade finite element mesh

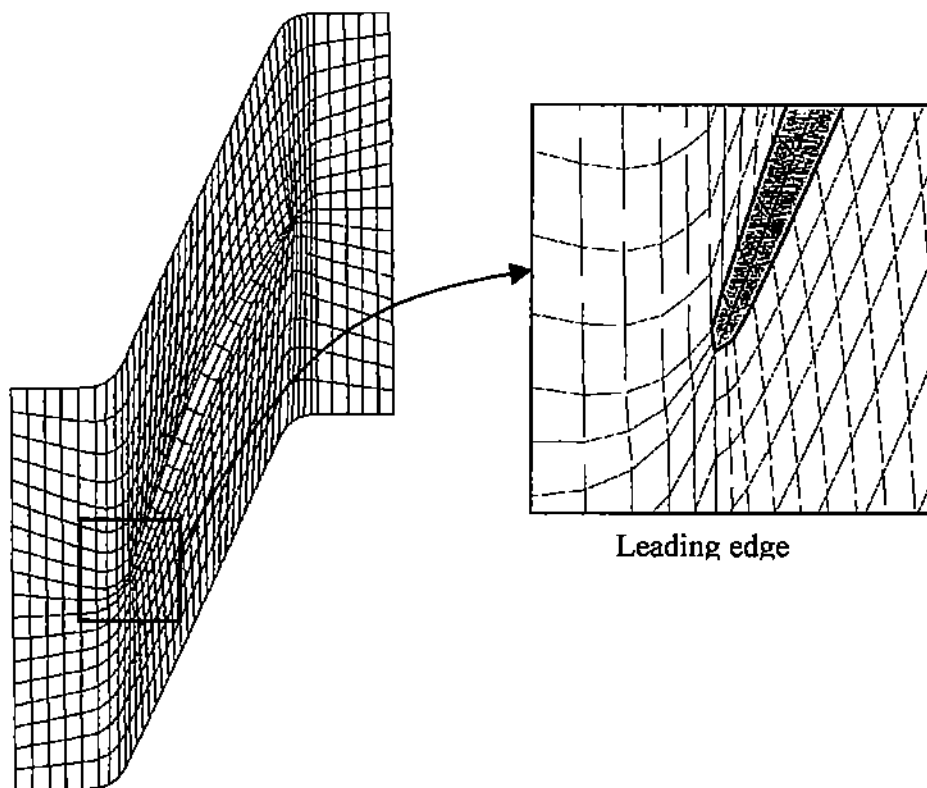


Figure 3. Finite element mesh for the fluid and steel blade at blade tip

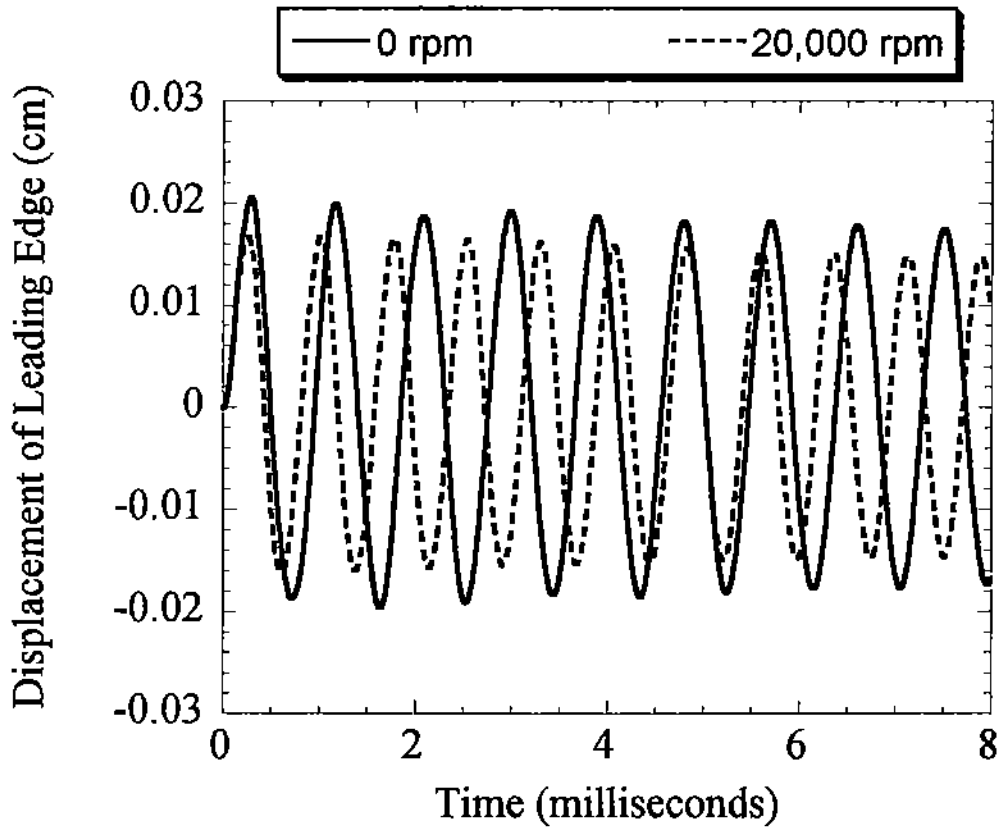


Figure 4. Blade tip responses in a vacuum for bending impulse.

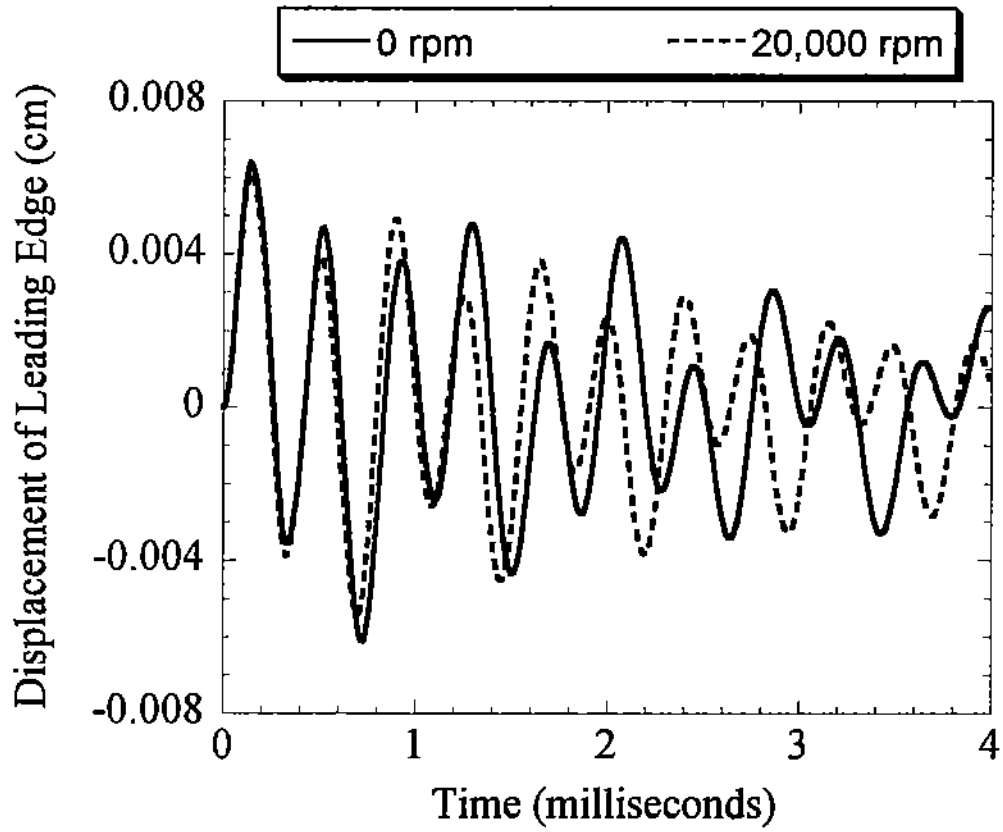


Figure 5. Blade tip responses in a vacuum for torsion impulse

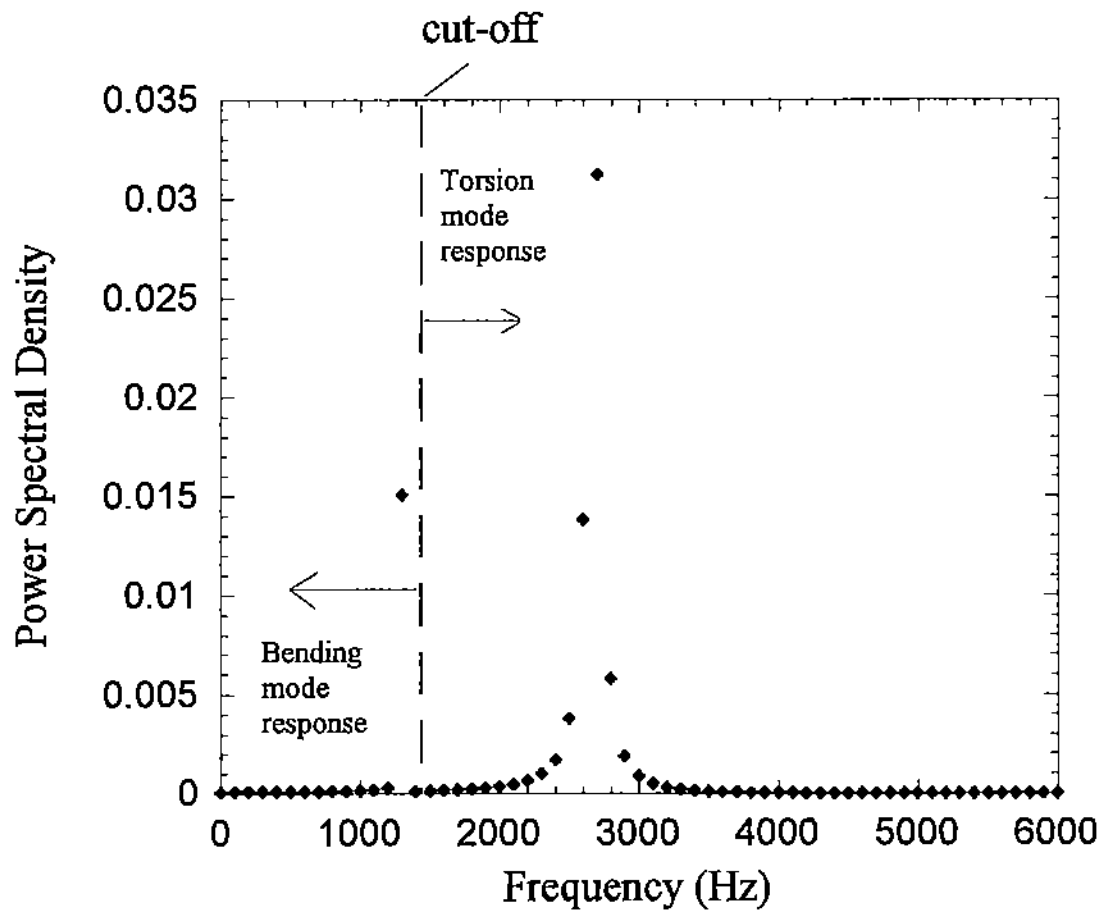


Figure 6. Frequency response to torsion only impulse of rotating blade in vacuum

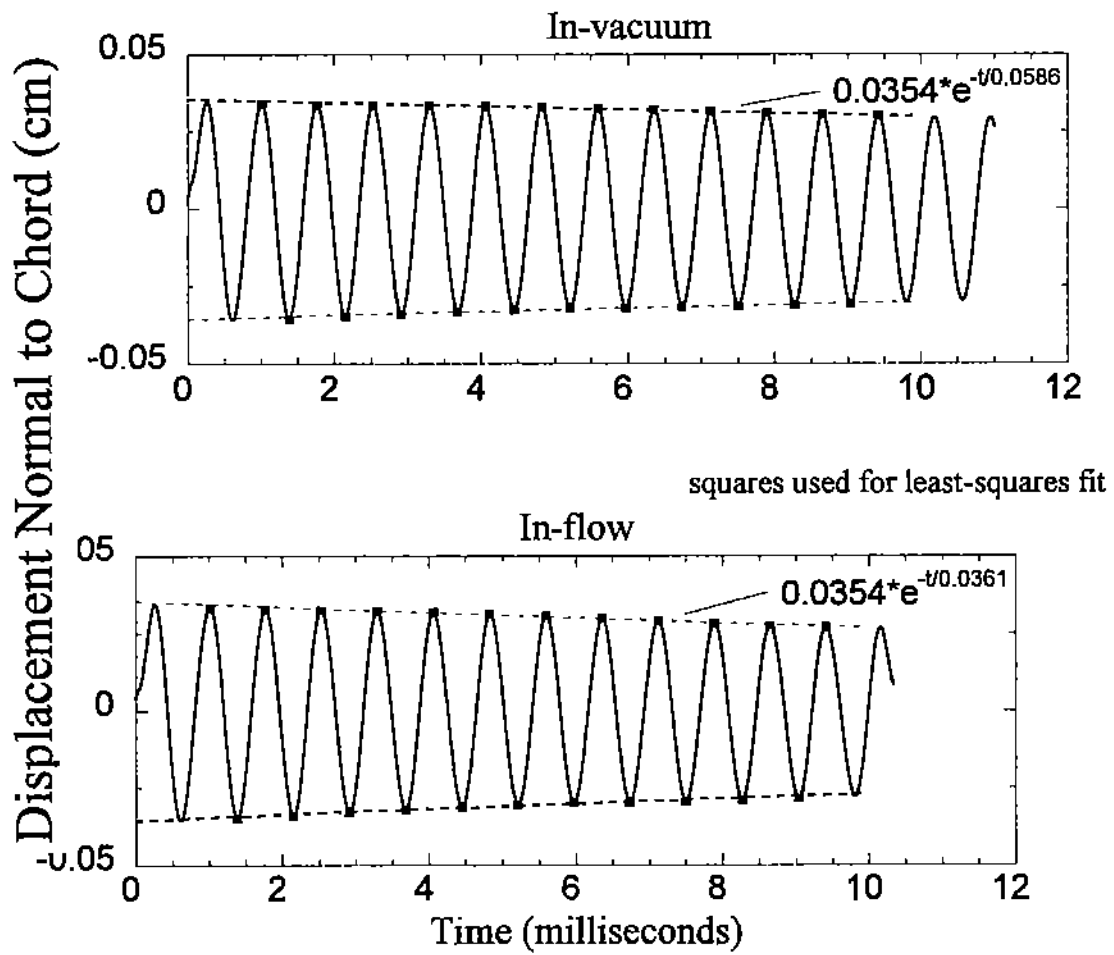


Figure 7. Tip leading edge displacement for bending-only impulse

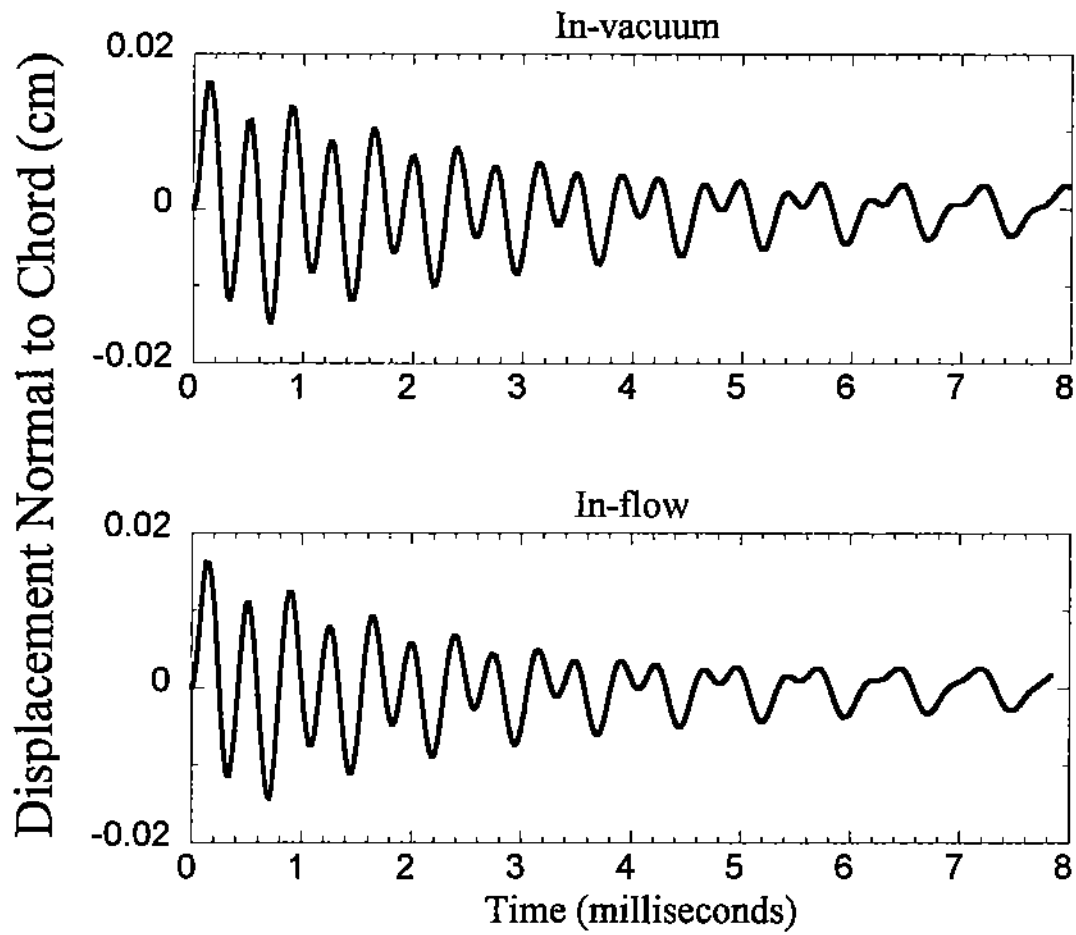


Figure 8. Tip leading edge displacement for torsion-only impulse before filtering

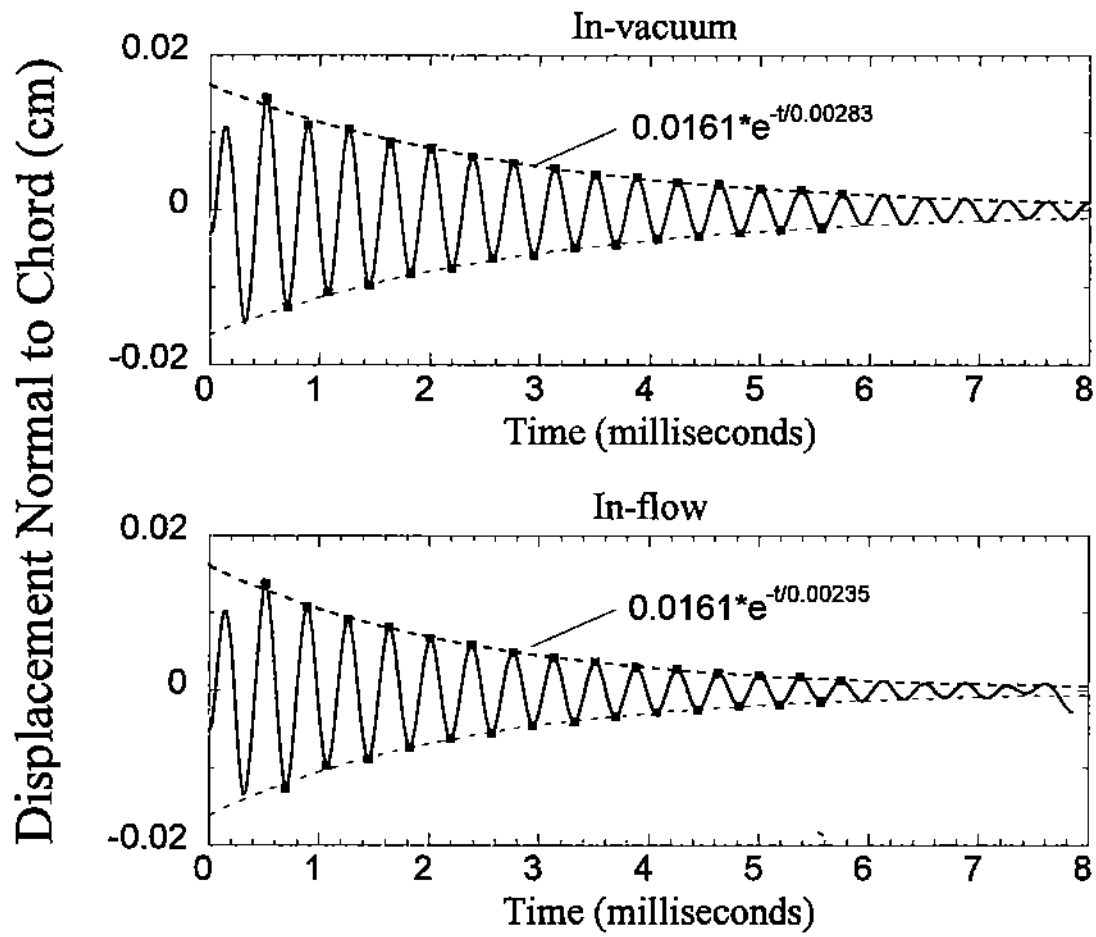


Figure 9. Tip leading edge displacement for torsion-only impulse after filtering



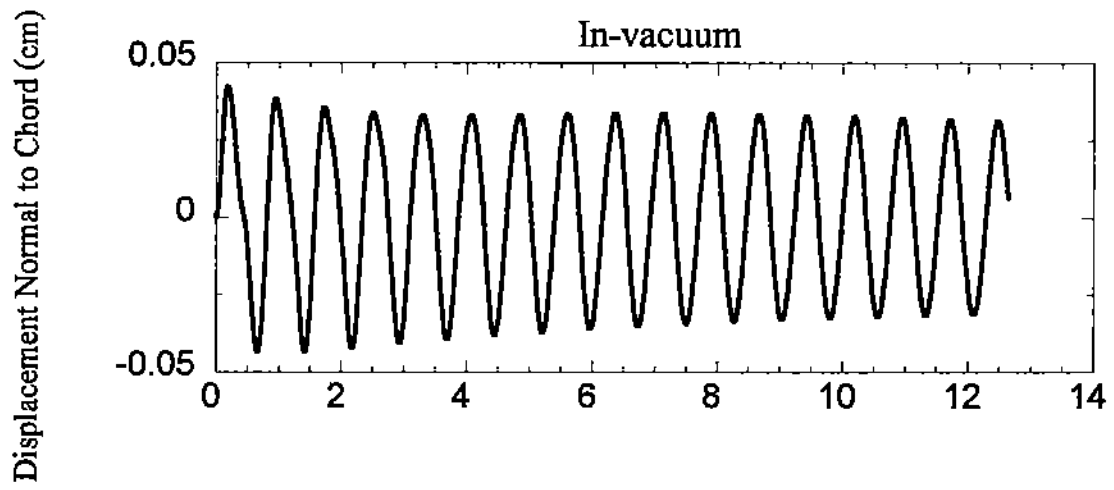


Figure 10. Tip leading edge displacement for bending/torsion impulse before filtering

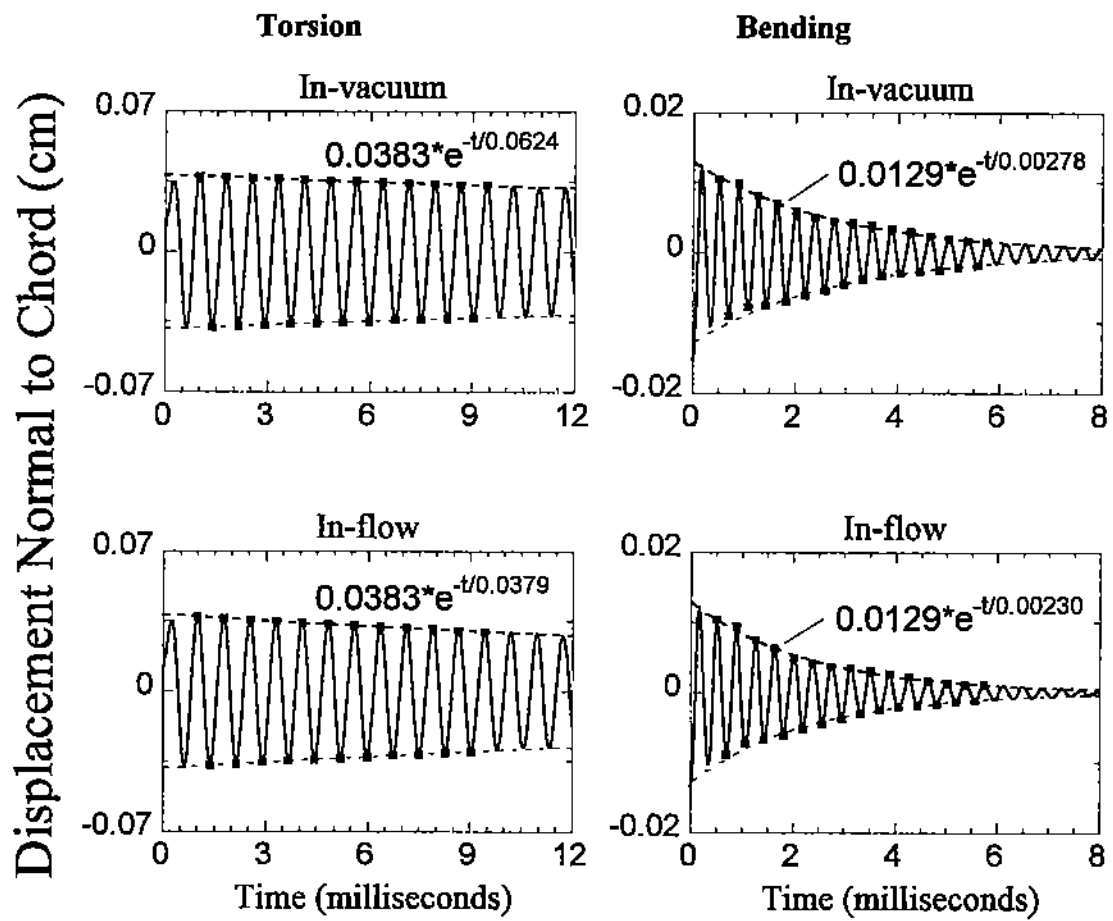


Figure 11. Tip leading edge displacement for bending/torsion impulse after filtering.

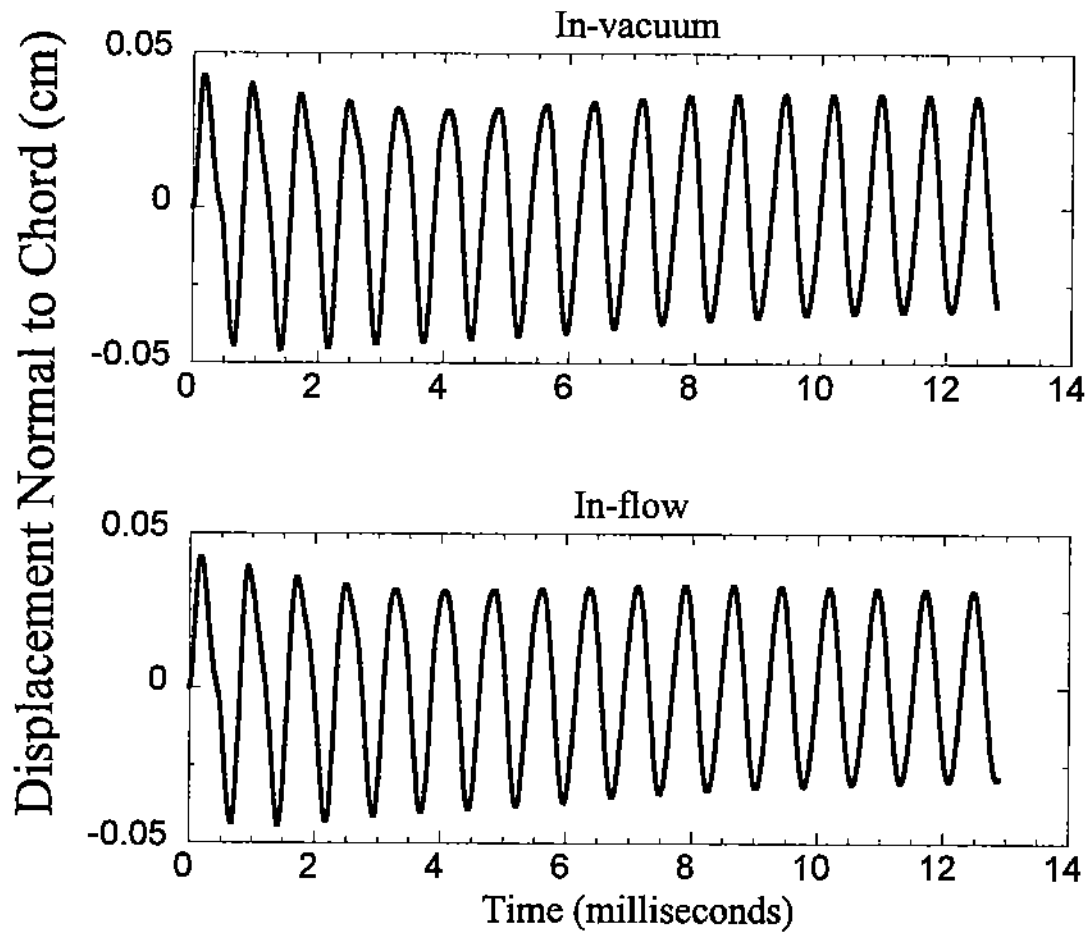


Figure 12. Tip leading edge displacement for low hourglass damping with bending/torsion impulse before filtering

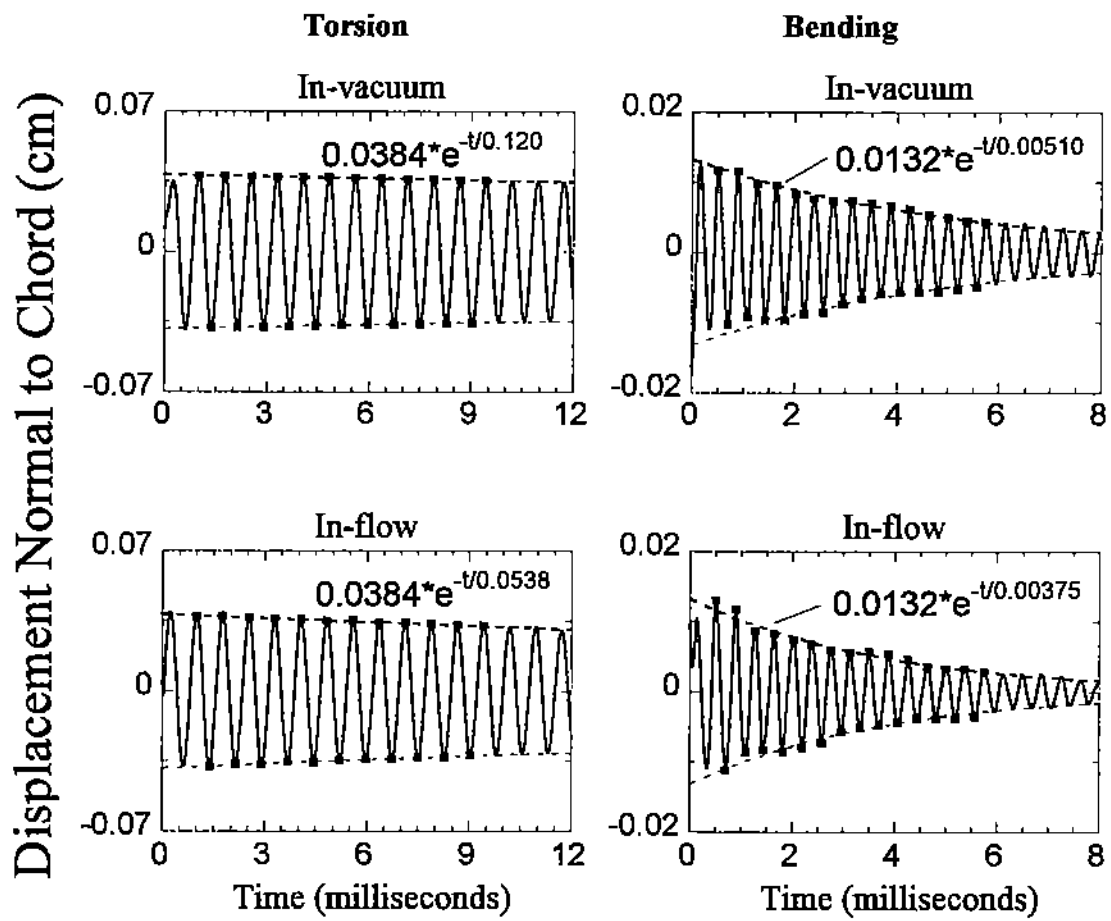


Figure 13. Tip leading edge displacement for low hourglass damping with bending/torsion impulse after filtering